ENGINEERING NEWS-RECORD

MARCH 19, 1953

SEVENTY-NINTH YEAR OF PUBLICATION

★ FACTORY MAKES PRESTRESSED BUILDING

★ THRUWAY TO EASE CITY'S TRAFFIC

A McGRAW-HILL PUBLICATION

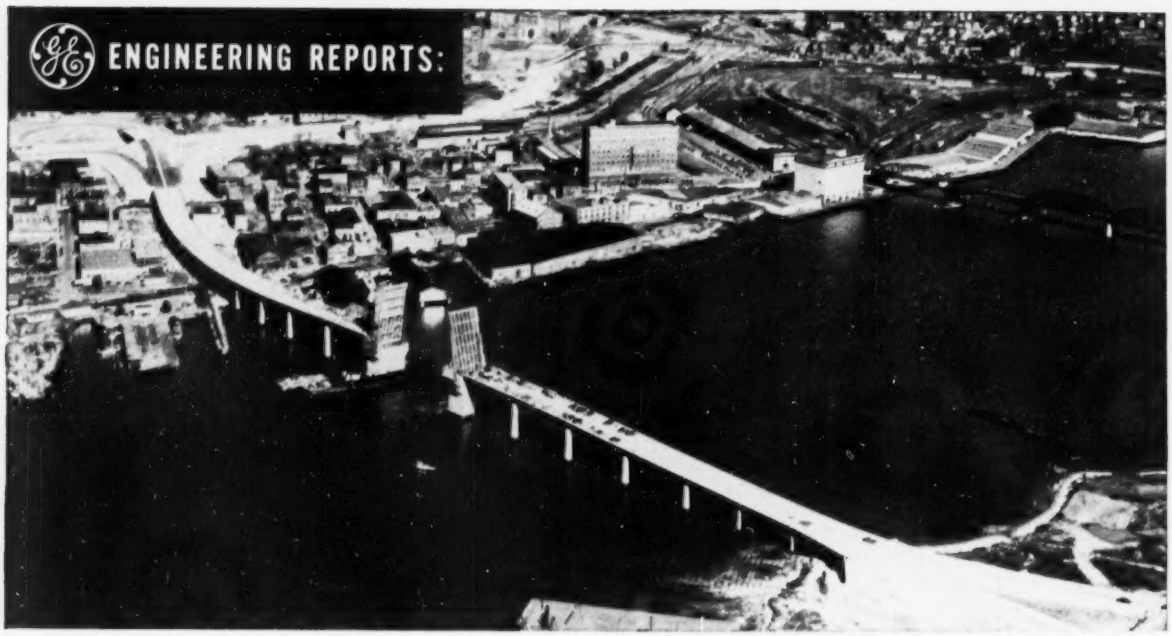

MOTORISTS SAVE 10 TO 30 MINUTES crossing from Norfolk to Portsmouth via the new G-E equipped bridge and tunnel. Bridge is 4-lane, 2135 ft between abutments. Bascule span is of the double-leaf, rolling-lift type with leaves each 90 ft long.

Bridge's drive system helps speed 29,000 cars per day

G-E equipment at Portsmouth - Norfolk Bridge gives fast movement, positive control of leaves

The new 4-lane bascule bridge across the Elizabeth River at Norfolk, Va.—part of a combined bridge and tunnel project built for the Portsmouth–Norfolk Bridge Tunnel Commission—is currently handling over 29,000 vehicles per day. Ability to handle this heavy traffic flow is due in part to electric equipment supplied and co-ordinated by General Electric.

In helping to develop the bridge's drive system, G-E engineers worked closely with J. E. Greiner Co., consulting engineers, Tidewater Construction Corp., engineers and contractors, and Tuck and Kendall Inc., electrical contractor. Result of this co-operation: a simple, dependable drive system that expedites traffic because it is easy to operate and provides positive-action control of bridge leaves for fast movement and smooth, safe seating.

This is one more example of how G-E engineers can help your engineers or consultants on electric equipment for heavy construction projects. Contact your local G-E Apparatus Sales Office early in the planning stage. General Electric Co., Schenectady 5, New York. 664-26

1878 75 1953 YEARS OF ELECTRICAL PROGRESS

POSITIVE-ACTION CONTROL of span motors is centered in this G-E operator's desk. Fine-scale selsyn dial pinpoints position of each leaf during seating.

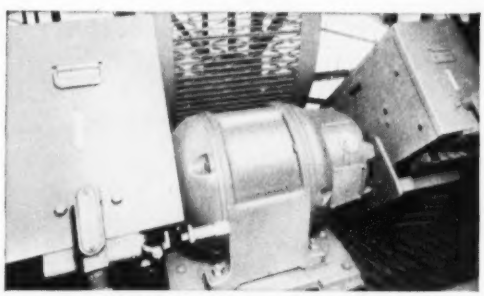

EACH LEAF IS MOVED by 2 G-E 25-hp motors (one shown). G-E motor control center, operated from desk, controls these and tail locks, gates, barriers.

Engineered Electrical Systems for Heavy Construction

GENERAL ELECTRIC

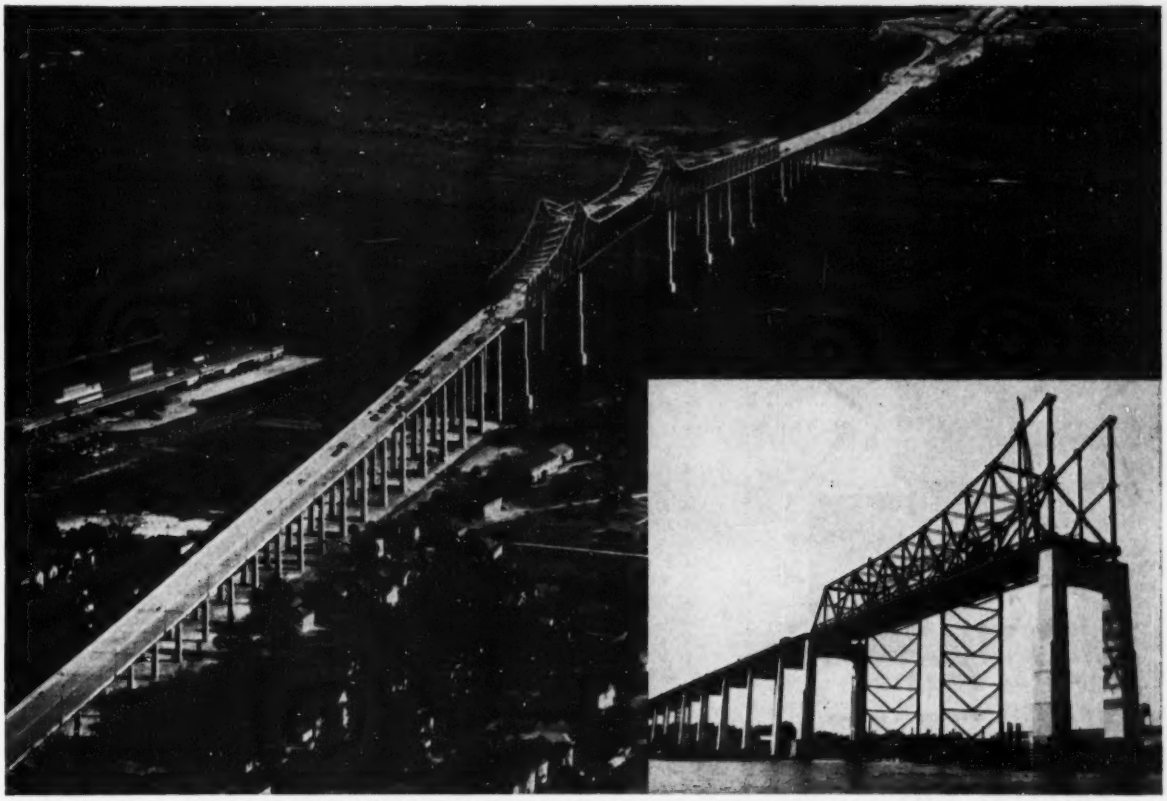

Left: Air view, looking east, of John E. Mathews Bridge, Jacksonville, Florida. Owner: State Road Department of Florida; Sam P. Turnbull, state highway engineer; W. E. Dean, engineer of bridges; Designers and Supervisors of Construction: Parsons, Brinckerhoff, Hall & Macdonald, New York; and Reynolds, Smith and Hills, Jacksonville, Associated Architects and Engineers. Right: Erection, on falsework, of main-span 406-ft anchor arms. Girder spans shown at left of this picture.

New Bridge Is Link In Jacksonville Expressway System

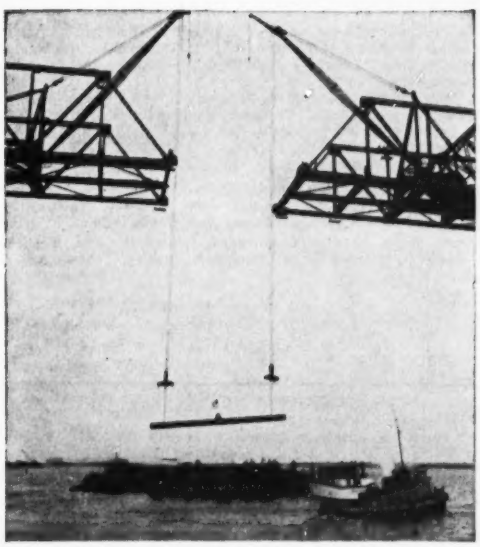

Bottom chord, 67 ft long and weighing 16 tons, being lifted from barge. It joins the cantilevered arms, and is the closing chord in the main span.

This magnificent new high-level bridge at Jacksonville, the John E. Mathews Bridge, is one of the largest of its type ever built in Florida. The 7376-ft structure was named for a justice of the Florida Supreme Court. It crosses the St. John's River, connecting Jacksonville with Arlington, and becomes a major unit of the Jacksonville-Duval County Expressway System.

The main-channel span of the John E. Mathews Bridge is an 810-ft through-cantilever truss, providing a 700-ft clear channel between fenders. The truss has a 150-ft underclearance at low water.

The bridge's approaches are beam spans and simple plate-girder spans, up to 115 ft in length. The 3447-ft east-end approach to the main span includes three truss spans, having a total length of 986 ft. The west-end approach is 2306 ft long. The main cantilever spans, consisting of two 406-ft anchor arms, plus the channel span, have a combined length of 1622 ft.

The bridge's four-lane roadway is divided by a raised concrete mall, 4 ft wide. There is also a 2-ft walk at either side of the roadway. With the exception of the main span, with its steel-grid floor, the roadway is of reinforced concrete.

Construction of the John E. Mathews Bridge was carried on from both banks of the river simultaneously. Steel for the 13,000-ton superstructure was rolled, fabricated and erected by Bethlehem.

BETHLEHEM STEEL COMPANY, BETHLEHEM, PA.

On the Pacific Coast Bethlehem products are sold by Bethlehem Pacific Coast Steel Corporation. *Export Distributor:* Bethlehem Steel Export Corporation

BETHLEHEM STEEL

BETHLEHEM STEEL CONSTRUCTION

STAR PERFORMER!

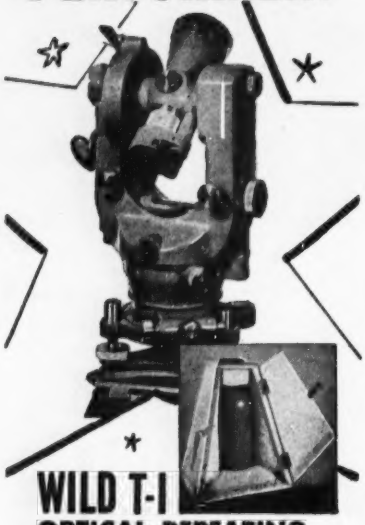

WILD T-I
OPTICAL REPEATING TRANSIT Proven in service for 20 years under tough field conditions.

CUTS JOB TIME
The right combination of features makes for increased accuracy and greater speed.

CHECK THESE ORIGINAL WILD HEERBRUGG *FEATURES:*

- ★ Fast direct reading to 1'. Safe estimation to 6". Micrometer prevents gross reading errors.
- ★ Optical plummet for greater reliability and speed.
- ★ Ball bearing vertical spindle of hardened steel.
- ★ Compact design with all parts fully sealed.
- ★ Complete "Behind Instrument" operation.

WILD instruments, Swiss precision engineered, excel in craftsmanship, durability and sturdiness.

For details phone or write for booklet EN 319

Complete repair & servicing facilities by factory specialists.

HENRY WILD
SURVEYING INSTRUMENTS SUPPLY CO.
OF AMERICA, INC.
MAIN & COVERT STS., PORT WASHINGTON, N. Y.
POrt Washington 7-4843

ENGINEERING NEWS-RECORD

ABP Member

Editorial offices: 330 W. 42nd St., New York 36. Tel. LOngacre 4-3000

Number of copies of this issue printed: 57,276

Waldo G. Bowman
Editor

E. E. Halmos Jr. ..... *Managing Editor*
V. T. Boughton ..... *Transportation, Power*
F. S. Merritt ..... *Architectural, Structural*
R. H. Dodds ..... *Contracting, Heavy Construction*
J. M. Connolly ..... *Materials and Equipment*
A. J. Fox Jr. ..... *Hydraulics, Water supply, Sanitation*
J. J. Christie ..... *National Affairs*
A. A. Layne ..... *Labor, Men and Jobs*
J. P. Chamberlain ..... *Business and Finance*
R. W. O'Neill ..... *International, Features*
A. R. Smith ..... *Municipal*
J. R. Carr ..... *Chicago*
L. L. Wise ..... *San Francisco*
Elsie Eaves ..... *Business News Department*
J. H. Webber ..... *Economics*
J. A. Mahoney, M. O. Wetzel ..... *Construction Reports*
M. W. Roessler, E. R. Huber, Dori Spielberg ..... *Statistics, Costs, Prices*
G. T. Orick ..... *Copy Desk*
H. G. Compton ..... *Photography*
T. D. MacGregor, Robin Bragg, T. J. Vilardi ..... *Copy, Rewrite, Layout*
Joan Ash ..... *Research*
J. C. Greenough, L. T. Tarpey ..... *Printing*

Washington News Bureau, Room 1189 National Press Building: G. B. Bryant, Jr., *Manager*, Glen Bayless, Jay Flocken, Boyd France, J. M. Gambatese, Sam Justice, W. H. Kearns, J. L. Kent, D. O. Loomis, Jesse Mock, Gladys Montgomery, A. L. Moore, M. A. Reichek, V. B. Smith, W. B. Whichard, Jr.

Domestic News Bureaus: *Atlanta,* 1321 Rhodes-Haverty Bldg., E. D. White; *Cleveland,* 1510 Hanna Bldg., R. A. Cochran; *Detroit,* 856 Penobscot Bldg., S. H. Brams; *Houston,* 1 Main Street, J. A. Lee; *San Francisco,* 68 Post Street, M. A. Ralston; *Los Angeles,* 1111 Wilshire Blvd., John Shinn; *Seattle,* 6040 Fifth Ave., N.E., Ray Bloomberg.

Correspondents: Albany, Albuquerque, Augusta, Me., Austin, Boston, Boulder, Baltimore, Birmingham, Bismarck, Charleston (W. Va.), Charleston (S. C.), Columbus, Cincinnati, Cleveland, Chicago, Cheyenne, Dallas, Detroit, Durham, Harrisburg, Helena, Houston, Hartford, Indianapolis, Jackson, Miss., Jacksonville, Jefferson City, Kansas City (Mo.), Lansing, Lincoln, Little Rock, Miami, Memphis, Minneapolis, Montgomery, Milwaukee, New Orleans, Norfolk, Omaha, Oklahoma City, Philadelphia, Pittsburgh, Portland (Ore.), Providence, Phoenix, Pierre, St. Louis, Schenectady, Syracuse, St. Paul, Seattle, Salt Lake City, Spokane, Topeka, Trenton. *Canada:* Montreal, Toronto, Ottawa, Victoria, Regina.

Foreign News Bureaus: J. K. Van Denburg, Jr., *New York;* G. W. Schroeder, *Frankfurt;* Nathaniel McKitterick, *London;* Herbert Leopold, *Manila;* John Wilhelm, *Mexico City;* Ross Hazeltine, *Paris;* A. W. Jessup, *Tokyo.* **Correspondents:** Amsterdam, Athens, Bangkok, Bogota, Bombay, Brussels, Buenos Aires, Caracas, Copenhagen, Geneva, Havana, Helsinki, Johannesburg, Lima, Madrid, Melbourne, Oslo, Rome, Stockholm, Sydney, Tehran, and 21 other principal cities and countries.

Robert F. Boger
Publisher

March 19, 1953 ENGINEERING NEWS-RECORD Vol. 150—No. 12

Member ABC and ABP

Published weekly by McGraw-Hill Publishing Company, Inc., James H. McGraw (1860-1948), Founder. **Publication Office, 99-129 North Broadway, Albany 1, N. Y.**

Executive, Editorial and Advertising Offices: McGraw-Hill Building, 330 W. 42nd St., New York 36, N. Y. Curtis W. McGraw, President; Willard Chevalier, Executive Vice-President; Joseph A. Gerardi, Vice-President and Treasurer; John J. Cooke, Secretary; Paul Montgomery, Senior Vice-President, Publications Division; Ralph B. Smith, Vice-President and Editorial Director; Nelson Bond, Vice-President and Director of Advertising; J. E. Blackburn, Jr., Vice-President and Director of Circulation.

Subscriptions: Address correspondence to Engineering News-Record — Subscription Service, 99-129 North Broadway, Albany 1, N. Y., or 330 W. 42nd St., New York 36, N. Y. Allow one month for change of address.

Subscriptions are solicited only from persons with an identifiable commercial or professional interest in construction and building. Position and company connection must be indicated on subscription orders. Single copies 25¢. Subscription rates — United States and possessions, $6.00 a year; $9.00 for two years; $12.00 for three years. Canada, $8.00 a year; $12.00 for two years; $16.00 for three years. Other Western Hemisphere countries, $15.00 a year; $25.00 for two years; $30.00 for three years. All other countries, $20.00 a year; $30.00 for two years; $40.00 for three years. Entered as second class matter October 29, 1936, at the Post Office at Albany, N. Y., under Act of Mar. 3, 1879. Printed in U. S. A.

Copyright 1953 by McGraw-Hill Publishing Co., Inc. — All Rights Reserved.

for trouble-free service

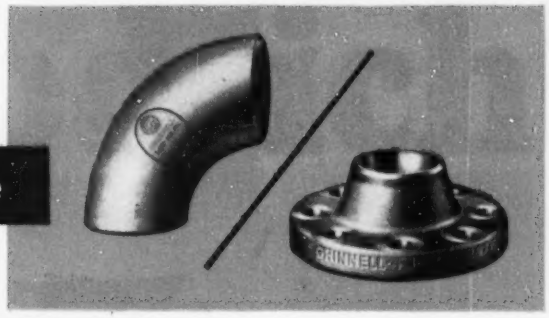

GRINNELL

STAINLESS STEEL WELDING FITTINGS and FLANGES

To help combat mounting costs in the installation and maintenance of piping systems where corrosive or certain other service conditions are involved, Grinnell offers a comprehensive range of welding fittings and flanges in stainless steel.

- **To prevent corrosive attack.**
- **To obtain adequate impact resistance at low temperatures and sufficient creep strength at high temperatures.**
- **To provide sanitary conditions.**
- **To avoid contaminating the product.**

Grinnell welding fittings and flanges are available in types 304, 347 and 316. These are in the chromium-nickel grades known as "18-8". The corrosion resistant properties of stainless steels are primarily due to the chromium content which ranges from 17% to 20%. The addition of nickel in ranges from 7% to 14% improves the corrosion resistance as well as the properties at elevated temperatures. A molybdenum addition of 2% to 3%, as found in type 316, increases the resistance to sulphurous and phosphoric acids, brine and hypochlorite solutions, and improves the general resistance to other corrosive liquids, as well as improving the physical properties at elevated temperatures. A columbium addition of approximately 0.4% to 1.0%, as found in type 347, creates non-susceptibility to carbide precipitation which can cause intergranular corrosion.

In addition to stainless steel, Grinnell offers welding fittings and flanges in carbon steel, nickel, Inconel, Monel, aluminum and brass.

Write for new booklet giving complete data on Grinnell stainless steel welding fittings and flanges. No obligation.

stainless steel welding fittings
Types 304, 347, 316

DESCRIPTION	SCHEDULE†	PIPE SIZE, IN.‡
90° Long Radius Elbow 45° Long Radius Elbow 180° Long Radius Return Straight Tee	5s, 10s, 40s, 80s	½ to 12
Reducing Tee	5s, 10s, 40s, 80s	⅜ to 12
Cross (Straight and Reducing)	5s, 10s, 40s, 80s	1¼ to 12
Concentric Reducer Eccentric Reducer	5s, 10s, 40s, 80s	¾ to 12
Lateral (Straight or Reducing)	5s, 10s, 40s, 80s	1 to 12
Cap	5s, 10s, 40s, 80s	½ to 12
Lap Joint Stub End-Long	10s, 40s, 80s	½ to 12
Lap Joint Stub End-Short	5s, 10s, 40s,	½ to 12

† 5s is Featherweight, 10s Lightweight, 40s Standard, 80s Extra Strong.
‡ Larger sizes available on special order.

stainless steel flanges

150 lb. and 300 lb. Steel Flange Standard *(Higher series available on application).*

DESCRIPTION	PIPE SIZE, IN.
Welding Neck Slip-on Lap Joint Threaded Socket Type Blind	½ to 24

150 lb. Corrosion Resistant Standard. *(For use with schedule 10s and 5s pipe. Rated at 150 psi at 500°F, 225 psi at 150°F, when used with full-faced gaskets).*

DESCRIPTION	PIPE SIZE, IN.
Buttwelding Slip-on Blind	½ to 12

GRINNELL
WHENEVER PIPING IS INVOLVED

Grinnell Company, Inc., Providence, Rhode Island • Coast-to-Coast Network of Branch Warehouses and Distributors

pipe and tube fittings • welding fittings • engineered pipe hangers and supports • Thermolier unit heaters • valves
Grinnell-Saunders diaphragm valves • pipe • prefabricated piping • plumbing and heating specialties • water works supplies
industrial supplies • Grinnell automatic sprinkler fire protection systems • Amco air conditioning systems

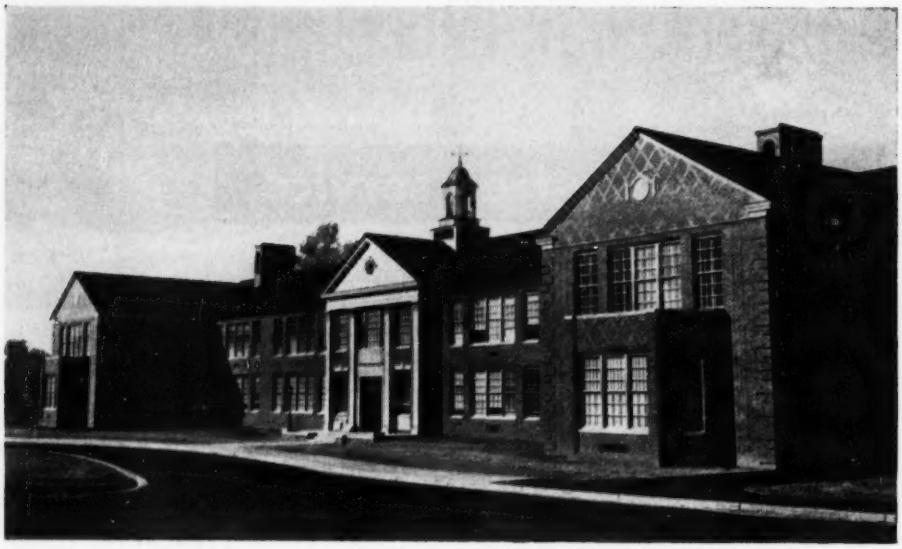

In Ladue, St. Louis County, Missouri, this new million-dollar school was built by Robert Paulus Construction Company.

to make wood LAST LONGER
treat it with MONSANTO PENTA

Lumber treated with penta will resist rot and insect attack far beyond the normal life span of untreated timber. Forced deep into the cells of the wood by pressure, penta makes the wood virtually time-proof. Rain and ground water can't wash it out. Properly formulated and applied, penta will leave your wood clean, paintable and dimensionally stable, if specified.

In public buildings, durability is a must. Horton Watkins High School, newly built in one of St. Louis County's finest residential sections, is assured many years of extra life. Nailing strips and sleepers, door frames, and other wood parts in the school are penta pressure-treated against decay and wood-destroying insects.

You build *permanence* in your work and save money for your client when you specify Monsanto Penta.

Information for contractors. This brochure, titled "Specify Penta," gives facts and figures on penta applications. For your copy, write: Monsanto Chemical Company, Organic Chemicals Division, 800 North Twelfth Blvd., St. Louis 1, Missouri.

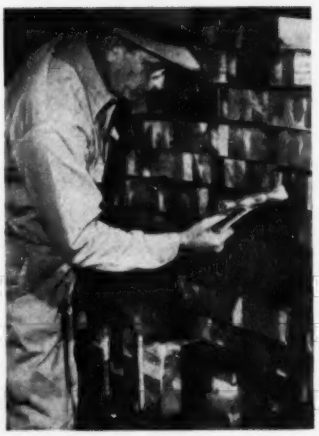

Understripping of gym floor, as well as white-pine door frames, was pressure-treated to a 6# retention of penta solution.

Penta has wide usage possibilities. It is specified regularly by utilities, railroads, in heavy construction and in farm and home building.

MONSANTO
CHEMICALS—PLASTICS

SERVING INDUSTRY... WHICH SERVES MANKIND

B.F.Goodrich

New Earth-Mover tires haul giant loads, yet float over sandy ground

FRANK T. HICKEY, INC., of Los Angeles is an earth-moving firm operating throughout southern California. The unit above is hauling 24 tons of sand fill for troop barracks at Fort Ord.

Plowing through sandy soil under a 24-ton payload, plus the weight of the equipment, would cause most tires to bog down and become useless. That's why this contractor mounts his machinery on new B. F. Goodrich All-Nylon 65" Special Earth-Mover tires. They are specifically designed to pull through loose, shifting soils without sinking in.

Special Earth-Mover tires do this because they operate at low air pressures that give greater flexibility. The tires conform more to the soil, rolling over it rather than digging into it. The cord body of the tire is made of nylon which stands the strain of this flexing action better than other materials.

Because extra-high cleats often have a tendency to churn the ground, Special Earth-Mover cleats are low and shallow. They provide positive traction, yet will not dig in and cause the tire to flounder. Your equipment stays on top of the earth and on schedule.

If your off-the-road job calls for work in soft, sandy ground, you can get top traction and flotation by using new B. F. Goodrich All-Nylon Special Earth-Mover tires. They are the result of two years' development and testing by a noted off-the-road equipment manufacturer.

B. F. Goodrich makes a complete line of tires that cut costs and save time on all types of off-the-road service. See your retailer—he's listed under Tires in the Yellow Pages of your phone book—or write *The B. F. Goodrich Company, Akron, Ohio.*

RESEARCH KEEPS B.F.Goodrich FIRST IN RUBBER

Specify B. F. Goodrich tires when ordering new equipment

GULF PRODUCTS *and* FINE SERVICE

keep equipment rolling on

Pittsburgh Parkway Project

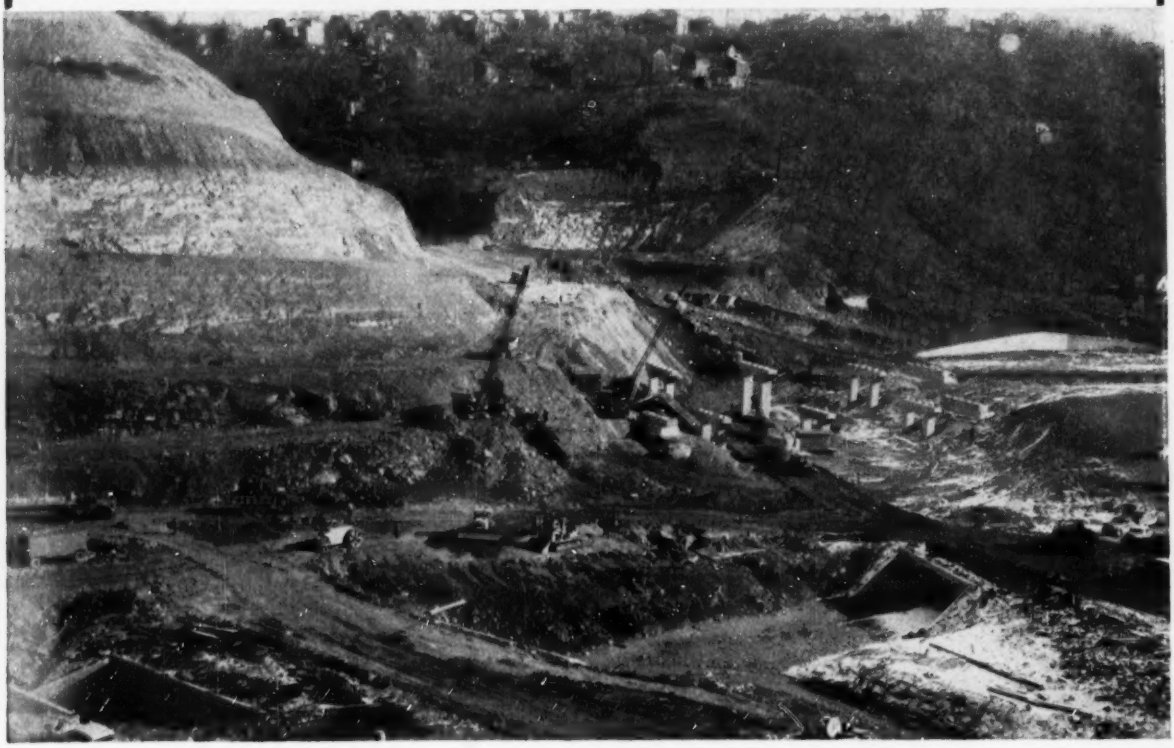

Dinardo, Inc., Pittsburgh, Pa. has the contract from the Pennsylvania Department of Highways for construction of the Saw Mill Run Interchange on the Penn-Lincoln Parkway West. The job involves moving 750,000 cu. yds. of earth and building 6 structures. This is one of several important Dinardo contracts in connection with Pittsburgh's huge Penn-Lincoln Parkway project.

It's a speedier, more profitable job when equipment performs smoothly and dependably. And the use of quality petroleum products is one of the surest guarantees of this kind of performance.

That's why so many contractors on the big, tough jobs specify Gulf lubricants and motor fuels. They have found that Gulf lubricants provide an extra margin of protection against mechanical delays . . . that Gulf fuels deliver full power . . . and they appreciate Gulf's prompt delivery service.

Let us discuss with you how Gulf Quality Petroleum Products can help you on your next job. Write, wire, or phone your nearest Gulf office.

GULF

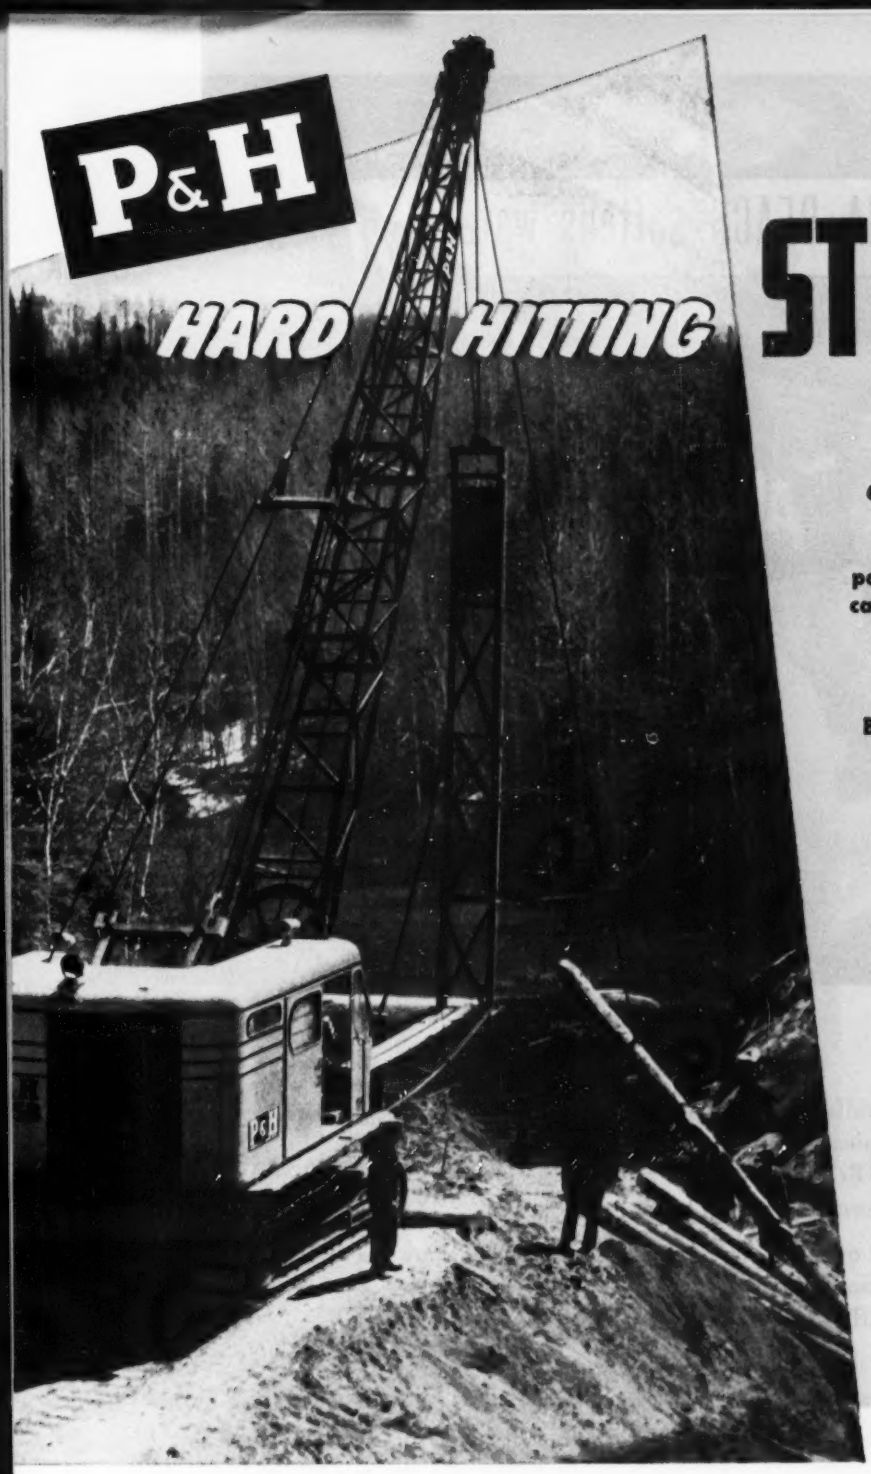

STABILITY!

No question about it— you've got it "on the hook" with a P&H!

Greater stability not only lets you handle heavy loads with less danger of tipping strains, but also enables you to use your power more freely — gives you the added capacity to get more done in a day's work. Rolled alloy steels, welded throughout, give you the structural strength to take it in stride.

But it doesn't stop there. True tractor-type crawlers give you the smoothest, surest-footed mobility you've ever known on a power crane or shovel. You can turn gradually, sharply, or right about-face — maneuver in and out of tight corners with perfect ease.

You've heard P&H owners brag about what their machines will do. Isn't it time to find out for yourself? You've nothing to lose, much to gain in modern performance and lower costs.

P&H POWER SHOVEL AND CRANE DIVISION
HARNISCHFEGER CORPORATION
MILWAUKEE 46, WISCONSIN

See your P&H Dealer!

Look to P&H for the most modern features in Power Shovel and Truck Crane construction. There's all-welded design, live roller circle, triple-safe boom hoist, hydraulic control, plus a low center of gravity that provides a higher ratio of lifting capacity to gross weight. This means more WORKABILITY . . . BETTER PERFORMANCE . . . GREATER SAFETY. Write for literature on the size you need.

the P&H *Line*

THE installation of Permutit automatically controlled zeolite water softeners economically solved the problem of hard water for this Florida city. The Automatic Regeneration feature saves valuable man hours, eliminates the possibility of costly human errors, and assures a constant supply of clear, soft water.

Well water of 20 grains hardness is softened by Permutit Q, the high capacity sodium cation exchanger, which in this installation is regenerated with brine from a nearby salt well.

Consulting Engineers, Russell & Axon of Daytona Beach, Florida, planned the layout and recommended Permutit Automatic Equipment and high capacity Permutit Q. For information concerning your city's water problems write to: THE PERMUTIT COMPANY, Dept. ENR-3, 330 West 42nd Street, New York 36, N. Y.

WATER CONDITIONING HEADQUARTERS
FOR OVER 40 YEARS

PERMUTIT®

Tandem-Drive Units

MOVE EXTRA-HEAVY LOADS OVER EXTRA-RUGGED TERRAIN

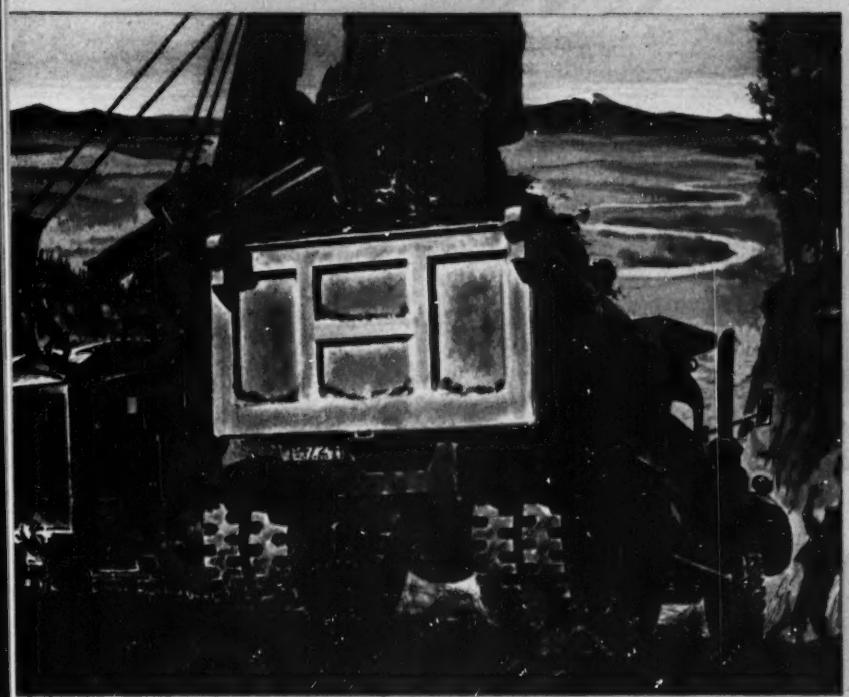

High-Powered Engines Can Be Used to Full Advantage!

TDA makes it possible to move the heaviest type of loads through rough off-highway terrain. In such fields as logging, mining or construction, where trucks must move miles over temporary roads to and from jobs, TDA Tandem-Drive Units provide the needed strength and pulling power.

These heavy-duty axle units take full advantage of high-powered engines, resulting in greater tractive ability and lower operating costs. TDA Tandem-Drive Units provide truckers with many other important advantages, too. For instance, the axles are always kept correctly spaced and aligned by means of a parallelogram suspension of the torque rods. This eliminates the possibility of weight transfer.

Since tandem-drive units first came into use more than 30 years ago, Timken-Detroit has led the trucking field in their design and manufacture. Designed and built in their entirety by TDA, these rugged tandems have been used in practically every type of hook-up for tandem rear axles in this country and abroad, under every make of six-wheel truck. Therefore, the TDA design of tandem-drive units reflects this 30-year record of engineering and manufacturing leadership. Write to Timken-Detroit today for the interesting story of Six-Wheelers and TDA Tandem-Drive Units.



HEAVY-DUTY TANDEM WITH DOUBLE-REDUCTION DRIVE

Available with either through drive or inter-axle differential, these rugged units are especially adaptable for off-highway use. They move mammoth loads with ease regardless of terrain. Powerful TDA Brakes assure positive vehicle speed control at all times.



DOUBLE-REDUCTION FINAL DRIVE WITH INTER-AXLE DIFFERENTIAL

This double-reduction final drive, has rugged, time-proven Hypoid gearing in the first reduction. The slower gear ratios practical with this type of final drive make it especially adaptable to high-powered engines—an important feature in off-highway operation.

The Accepted TDA Standard

AXLES

THE TIMKEN-DETROIT AXLE COMPANY
Detroit 32, Michigan

WORLD'S LARGEST MANUFACTURER OF AXLES FOR TRUCKS, BUSES AND TRAILERS

PLANTS AT: DETROIT AND JACKSON, MICH. • OSHKOSH, WIS. • UTICA, N. Y. • ASHTABULA, KENTON AND NEWARK, OHIO • NEW CASTLE, PA.

The best-engineered trailer axles on the road come from Timken-Detroit!

This modern manufacturing plant, located at Kenton, Ohio, houses the Trailer Axle Division of The Timken-Detroit Axle Company.

Timken-Detroit *knows* trailer axles! More than 40 years' experience in building axles for trucks, buses and trailers attest to that! Furthermore, nine great plants—one of which is devoted to developing and producing trailer axles—are provided with every modern engineering, research and production facility. Highly trained technicians are constantly at work improving the materials, design and workmanship that go into every trailer axle produced by Timken-Detroit. Months, and often years, are spent in developing and testing axles before they ever leave the blueprint stage. In the trailer axle field, too, Timken-Detroit knows its business!

WORLD'S LARGEST MANUFACTURER OF AXLES FOR TRUCKS, BUSES AND TRAILERS

PLANTS AT:
DETROIT AND JACKSON, MICH. • OSHKOSH, WIS. • UTICA, N. Y.
ASHTABULA, KENTON AND NEWARK, OHIO • NEW CASTLE, PA.

The Accepted DTA Standard CO®

AXLES

THE TIMKEN-DETROIT AXLE COMPANY
Detroit 32, Michigan

READER COMMENT

No objection

Sir: Contrary to the statement in the news item (ENR Feb. 5, 1953, p.27), the Corps of Engineers has no objection to construction of Priest Rapids Dam by the Grant County Public Utility District. However, the project should develop the full capabilities of the site as a part of the comprehensive plan for the control and utilization of the water resources for power, flood control, navigation and other beneficial purposes.

The Corps of Engineers will continue to cooperate with the Grant County PUD in every way possible, including the furnishing of available data and preliminary plans. Since the project has been authorized for construction by the Corps of Engineers, additional action by the Congress may be necessary if the Priest Rapids Dam is to be constructed by the PUD. If the PUD is to be compensated for the cost of flood control storage, additional legislative authority would be necessary.

COL. E. C. ITSCHNER
Division Engineer
North Pacific Division
Corps of Engineers
Portland, Ore.

U. S. firms in Canada

Sir: In ENGINEERING NEWS-RECORD Jan. 8, 1953, p 56, there appeared a story about U.S. firms opening engineering offices in Canada. You omitted mention of Giffels & Vallet of Canada, Ltd., Engineers. The office in Windsor, Ont., has been operating since 1950, and numbers among its clients American Can Co., Polymer Corp., A. V. Roe Canada, Ltd. and Ford Motor Canada, Ltd. That office is now designing the largest single industrial building in Canada for Ford at Oakville, Ontario. This building will comprise 1,400,000 sq ft of floor area.

KENNETH HOWARD
Giffels & Vallet, Inc., L. Rossetti
Detroit, Mich.

Is coliseum too elaborate?

Sir: The article in your Feb. 5 issue, "Curved roof on cables spans big arena," was very interesting, but it raised one question: Why was it necessary to build the abutment portion of the arches with the elaborate system of footings tied together by cables in a tunnel? Why could the arches not have started at the point labeled "Detail B" and rested on a buttressed pier?

The pier would have had to be buttressed to carry the outward thrust, but it would seem that the other horizontal components of the thrust in the two arches would have balanced each other, and that this construction would have materially reduced the cost.

RALPH W. POWELL
Department of Mechanics
The Ohio State University
Columbus, Ohio

Fire protection for underground shelter

Sir: In your issue of Nov. 13 last, you report the underground communications center built by the Army inside Raven Rock Mountain about five miles east of Fort Ritchie, Maryland. I have not as yet seen anyone who would suggest how best to deal with one detail of the construction of this and other large underground occupancies. It should have the attention of designers because it may be desirable to have a substantial amount of "bombproof" space available.

A fire inside one of these caverns would give off heat, smoke, and toxic products of combustion and set up a condition whereby the majority of the occupants of such a building could be killed in a fire simply because they could not get out as fast as the fire could spread. The ordinary ventilating system may or may not be arranged so that it also forms a flue system for venting pressures developed in fires.

The most aggravated condition will be that which is produced when, as and if, such underground spaces are used for warehouse or manufacturing purposes.

One reason for large fires and losses in warehoused materials is that buildings, even fire-resistive ones, tend to deny access to piles of burning material. Since the control of fires in many materials requires that the piles be actually pulled apart to get at the burning sections, this matter of access is of major importance. As a minimum form of fire protection, all areas should be protected by properly designed automatic sprinkler systems.

The pressures developed in a fire would force smoke, toxic products of a combustion, heat and flames directly against any persons who might attempt to enter an underground space. What such spaces need is an arrangement of flues so located as to make sure that fire in any section is

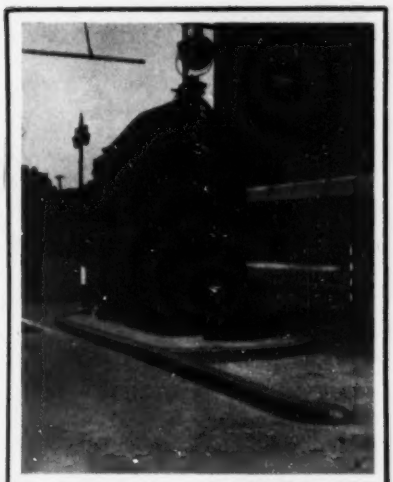

After 20 Years



. . . this 8" wide island at entrance to **HOLLAND TUNNEL** is in perfect condition. The island is built of **ARMORED CONCRETE** — concrete protected by cast iron against abrasion and impact.

Flockhart method of anchorage takes the cast iron completely out of tension

Write for free descriptive catalog on armored concrete.



FLOCKHART FOUNDRY CO.
84 Polk St., Newark 5, N. J.

Gentlemen:

Please send me Flockhart Catalog No. 13

name.....

co. name.....

st. and no.....

city, state.....

It's the "Guardian Gate..."

to confine operating costs that could become "Public Enemies"

CHAPMAN'S *Standard* SLUICE GATE

You shut the gate on excessive costs the moment you specify Chapman Standard Sluice Gates. For installation is fast and foolproof, because the interchangeable stems and couplings need no match-marking.

And then you *lock* the gate on excessive costs . . . for repairs and replacements parts (when and if needed) can be straightway dropped into place *in the field*, without alterations.

What's more, Chapman Standard Sluice Gates can be specified with any type of operating control . . . manual, hydraulic, or electric. Catalog No. 25 gives complete details and specifications. Write for your copy *now*.

The CHAPMAN Valve Mfg. Co.
INDIAN ORCHARD, MASSACHUSETTS

Ant's-eye view of

SOUND CONSTRUCTION

Made for LONG SERVICE LIFE with LESS MAINTENANCE

Amcreco
Lowry Process
Creosoted Products

TIMBERS PILES PLANKING
FRAMED BRIDGE TIMBERS
POLES CROSS ARMS CONDUIT
ADZED AND BORED CROSS TIES
BRIDGE TIES

Strength and durability in the basic foundation builds soundness into your construction jobs. That's why Amcreco Creosoted Products are selected from the soundest timber — pressure treated by an advanced technique based on the Lowry Process—to assure enduring, long-lasting bridge work and freedom from maintenance troubles. As an added benefit, Amcreco Creosoted Piles, Framed Bridge Timbers and Planking economize in first cost, permit speedier erection. For economical "life insurance" on your next bridge job, specify Amcreco.

Pressure-treated for strength that lasts!

AMERICAN CREOSOTING COMPANY
INCORPORATED
COLONIAL CREOSOTING COMPANY INCORPORATED
AMCRECO
GEORGIA CREOSOTING COMPANY INCORPORATED
GENERAL SALES OFFICE — CHICAGO, ILLINOIS

"Plus" Payloads
for GREATER HAULING PROFITS

...with
ROGERS
TRAILERS

Photo: Courtesy of Ralph Myers Construction Co., Bloomington, Indiana.

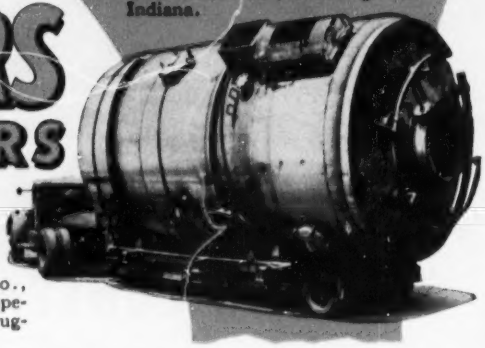

The job of hauling this 32-ton Electric Precipitator from Cressona, Pa., to Pottsville, Pa., was taken in easy stride by the Moore-Flesher Hauling Co., Pittsburgh, Pa., with their specialized knowledge and their rugged Rogers Trailer.

Hauling "Plus" Payloads without overloading is not only a possibility, but a relatively common practice by enterprising hauling contractors who rely upon the sturdy backbones of their Rogers Trailers to withstand heavy, bulky loads under strenuous operating conditions.

It's just one of the many reasons why Rogers has been privileged to serve a larger number of "repeat order" customers since the year of 1915 when the first trailer was built.

We'll be glad to discuss your particular handling problem in terms of trailers that will best suit your needs and your pocketbook. Call, write or wire your agent TODAY.

This is the Sign of the Original and Genuine ROGERS TRAILER

This nameplate appears on every ROGERS TRAILER as your assurance of the GENUINE PRODUCT—Made Since 1915

Write for the LATEST CATALOG

EXPERIENCE builds 'em — PERFORMANCE sells 'em

ROGERS BROS. CORP.
ALBION, PENNA. CABLE: BROSITES

READER COMMENT

vented in a direction away from that which must be kept open for exit of occupants and as a means of access for fire fighting. The flue systems I visualize probably would have to be separate from the ventilating system, but I don't see how caverns filled with combustible material can be made tolerably safe unless the design engineers can find some way to deal with the pressures and heat from fires.

HORATIO BOND
Chief Engineer
National Fire Protection Association
Boston, Mass.

CALENDAR

Third Midwestern Conference on Fluid Mechanics, University of Minnesota, Minneapolis, Mar. 23-25.

American Congress, surveying and mapping, Shoreham Hotel, Washington, D. C., Mar. 23-25.

National Public Health Engineering Conference, Gainesville, Fla., Mar. 24-25.

Conference on prestressed concrete, Newark College of Engineering, Newark, N. J.—Apr. 6-9-13-16-20-23-27 and 30—7:30 to 9:30 P. M.

Building Officials Conference, Hotel Baker, Dallas, Tex., April 6-9.

Diamond Jubilee Convocation, Case Institute of Technology, Cleveland, Ohio, April 10-11. Topic "The Challenge of Free Men in the Atomic Age."

Tennessee Highway Conference, University of Tennessee, Knoxville, Apr. 16-17.

Pacific N. W. Industrial Waste Conference, State College of Washington, Pullman, Wash., Apr. 16-17.

National engineering conference, American Institute of Steel Construction, Engineering Societies Bldg., Detroit, Mich., Apr. 22-23.

Conference on residential air-conditioning, Packard auditorium, Lehigh University, Bethlehem, Pa., Apr. 24-25.

Concrete Reinforcing Steel Institute, annual meeting, the Carolina Hotel, Pinehurst, N. C., Apr. 27-May 2.

Pacific N. W. Conference, ASCE, Seattle, Wash., Apr. 30-May 2.

American Water Works Association, annual meeting, Municipal Auditorium, Grand Rapids, Mich., May 10-15.

Conference on instrumentation in water, sewage and industrial waste treatment, Manhattan College, N. Y. City, May 14.

Biennial Inland Empire sewage works school, State College of Washington, Pullman, Wash., May 14-16.

Society of Fire Protection Engineers, Palmer House, Chicago, May 21.

Society for Experimental Stress Analysis, Hotel Schroeder, Milwaukee, Wis., May 20-22.

National Society of Professional Engineers, Sheraton-Beach Hotel, Daytona Beach, Fla., June 18-19.

American Society for Engineering Education, annual meeting, University of Florida, Gainesville, June 22-26.

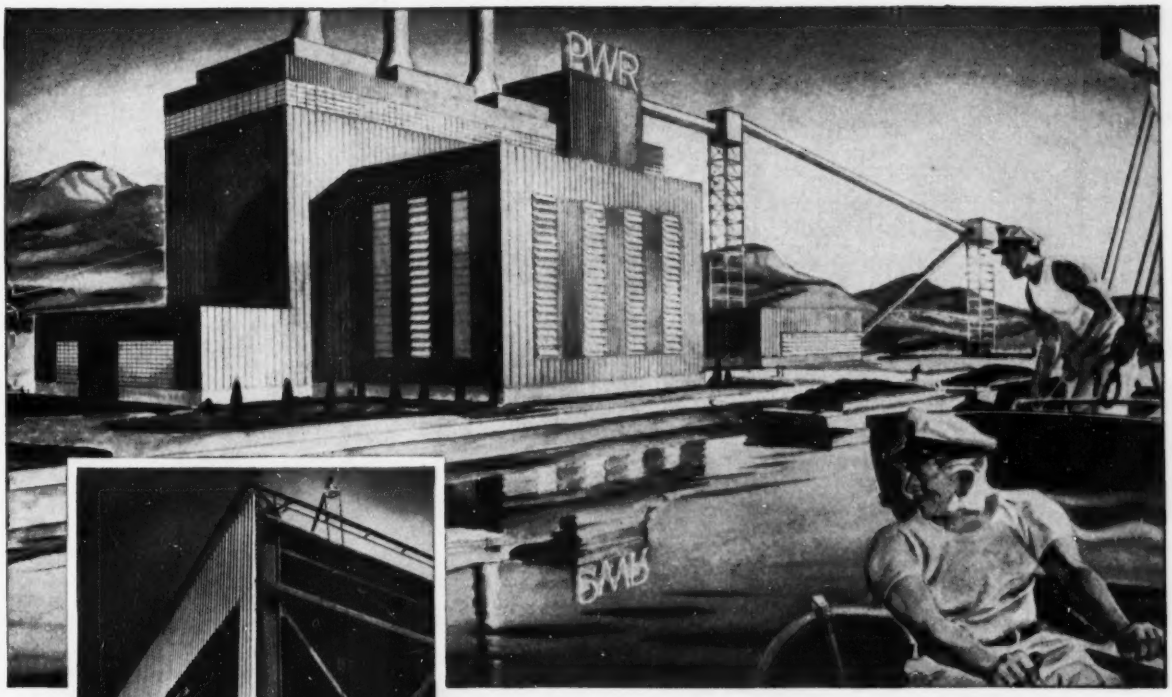

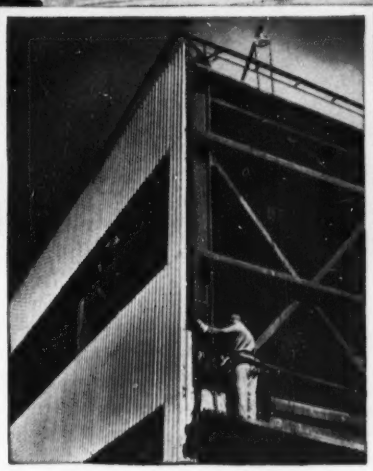

Modern, money-saving sidewalls for Power Plants—

and all other buildings, too!

This is a Q-Panel

First comes the flat interior (can be fluted). Then 1½" or more of non-combustible insulation. Then an exterior of stainless, aluminum, Galbestos* or metallic-coated steel in various forms. All sections are sealed against infiltration. Send for Structural details.

***Galbestos** is a Robertson product available as roofing or as an exterior surface for Q-Panels. It is made of sheet steel with asbestos felt bonded to it with molten metal. The felt is impregnated for greater durability then given a special asphaltic waterproofing. So complete is the bond that Galbestos may be shaped and worked on sheet metal equipment. Write for special Galbestos Booklet.

Builders of power plants as well as all other types of industrial and commercial structures are rapidly coming to realize the advantages of Q-PANEL sidewall construction. Q-PANEL walls provide true economy for the following reasons: 1. *Q-Panels are permanent construction, dry, and noncombustible,* yet may be demounted and re-erected elsewhere with 100% re-use. 2. *Q-Panels are light in weight* (7 pounds per square foot) thus reducing the load-bearing necessity in framing and foundations. 3. *Q-Panels have high insulation value . . .* superior to a 12" masonry wall with furred plaster interior. 4. *Q-Panels are quickly installed* because they are hung, not piled up. An acre of wall has been hung in 3 days with only 25 men. 5. *Q-Panel walls are handsome.* The exterior surface can be of various forms and either field painted, galvanized steel, stainless, aluminum or Galbestos*, thus providing a wealth of decorative combinations. *We have a booklet* available giving complete details and showing modern, lightweight, quickly-installed Q-Panels in use in many buildings. Write for it without obligation.

Robertson

Q-PANELS

for modern insulated wall construction

A Product of **H. H. Robertson Company**

2420 Farmers Bank Building • Pittsburgh 22, Pennsylvania

Offices in All Principal Cities in the United States and Canada

World-Wide Building Service

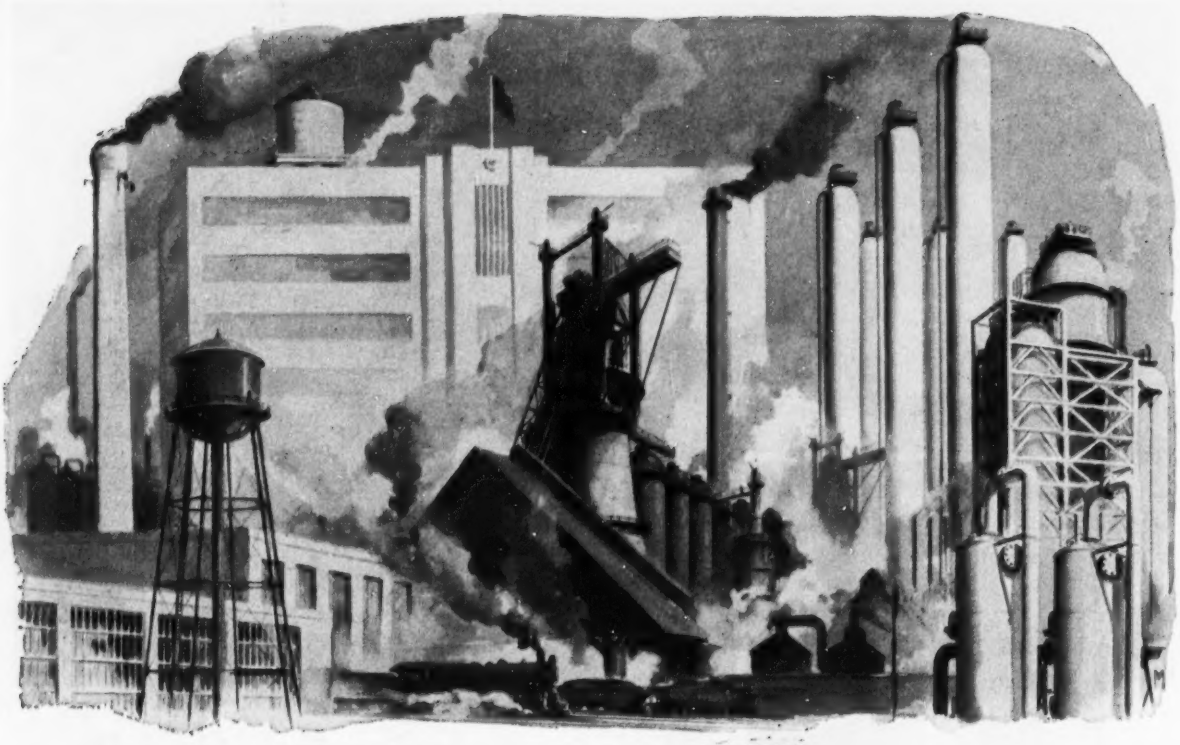

INDUSTRY *and the*
ROTOVALVE

MARCHING toward new goals—in a mechanized manufacturing world — industrialists, engineers, plant managers and management of all kinds are exploring every means of cutting costs and increasing efficiency. This explains the great demand and use of Rotovalves. Their design permits the conical plug to lift, rotate and seat itself, and assures free flow through a full circular opening in both valve body and plug, thereby cutting losses.

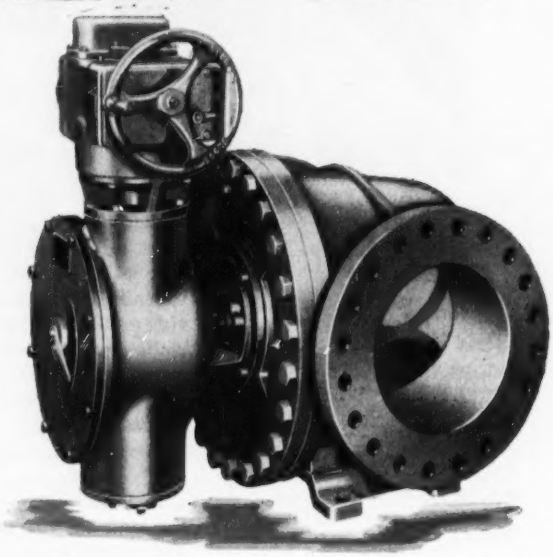

Available with either manual, hydraulic or motor control, and in all sizes to fit any industry! *Shipment from stock.* Send for complete data.

S. MORGAN SMITH Co.
YORK, PENNA. U.S.A.

THE CONSTRUCTION WEEK

CONTENTS

March 19, 1953 Vol. 150, No. 12

Highway budgets in '53 exceed record by 34% 2
Potential demand for big-city office space runs high .. 24
Atomic labor panel to be reorganized 29
Factory produces prestressed buildings 31
The mystery of the restless substratum 33
Thruway to ease Buffalo traffic 41
Row-type housing planned for Philadelphia 45
Aqueduct spans valleys with Yokohama water 53
Decline in housing starts seen 100

Departments

Reader Comment 11
Calendar 14
Construction Week ... 17
Washington Observer .. 19
National Affairs 21
Labor 29
Municipal 45
International 53
Men and Jobs 60
Obituaries 66
Research 71
Books 74
Business and Finance .. 100
New Products 119
Editorials 128

- **Second thought on slums**—New thinking on slum clearance is evident in debate in New York's Board of Estimate over new moves in the city's multi-million-dollar slum-clearance program.

  Up for debate were latest moves—condemnation proceedings—for the $31-million Triborough Houses in East Harlem. The development would include 2,158 units, house 8,100 persons.

  Said second-thinkers (including Comptroller Lazarus Joseph and Council President Rudolph Halley):

  Building such projects on already built-up land is expensive, removes taxable property from city tax rolls, adds expense for services and the city's share of operating costs.

  Remedy: Build on vacant land, finance rehabilitation of existing tenements.

- **Adds sense**—Canada's much-criticized refusal (ENR Sept. 11, 1952, p. 19) of a U. S. bid for use of Yukon River energy for power for a big aluminum plant in Alaska makes more sense, now that plans for a $2-billion development of the same power source (ENR Mar. 12, p. 17) have been revealed.

  Canada's Frobisher Ltd. wants to develop 500,000,000 hp out of the Yukon (through three hydro plants) to power a big smelting and processing operation of its own. That had to be set up before any thought was given to letting some of the power go to Alaska.

- **Fight results?**—One outcome of the current battle over location and ownership of the proposed dam across the Columbia River at Priest Rapids (ENR Feb. 5, p. 27) may be a stronger state power commission.

  The Grant County Public Utility District's plan to build a $412-million dam is being opposed by the Corps of Engineers (which has a prior bid for the site) and the Atomic Energy Commission, which thinks the dam a menace to its Hanford works.

- **Welding code**—The long, hard work of code-making is in sight of its goal, as a 12-man American Welding Society committee considers a draft of a proposed code for welding of reinforcing steel, metal inserts and connections in reinforced concrete.

- **Flood report reaction**—The Kansas legislature this week had before it a violent reaction to the plan (ENR Mar. 5, p. 21) for flood control on the Kaw River submitted by a special flood commission.

  Said the Kansas Reclamation Assn. in a resolution addressed to the legislature: The report surprised its members "to the point of shock." The report ignores recommendations of the state board of agriculture, and agencies of the federal government, takes no notice of soil conservation—would make the Kaw valley a desolate desert.

Constant Pounding Causes this—

How THORITE Patching Mortar, repaired and added strength to loading platform in 30 minutes

A QUICK PATCH for concrete walls and floors

Smaller areas, around large one, is in complete state of disintegration.

BEFORE

Largest area is 2' long and 18" wide, 1½" deep.

AFTER

Thorite Patching Mortar has been brushed and troweled into patch and leveled, even with surrounding surfaces.

Floor area was back in use, for heavy warehouse trucks, 30 minutes after beginning work.

Get our 20-page brochure pictorially describing in detail "HOW TO DO IT". It's yours for the asking!

Standard Dry Wall Products
NEW EAGLE, PENNSYLVANIA
Phone Monongahela 67

WASHINGTON OBSERVER

Joint Board for Settling Jurisdictional Disputes will be extended for another year on April 1. Specialty contractors have joined the Associated General Contractors in accepting changes proposed by the AFL Building Trades. Chief objective: eliminate friction within Building Trades Dept., give specialty unions and contractors more representation in making decisions, and bring dissident unions and contractor groups back under the plan.

Building trades chief Richard J. Gray won't serve on the joint board—new rules bar Building Trades Dept. officers. Gray helped organize the board in 1948 and will be missed. Other major change: enlarging the board to allow alternates for the four union and four contractor members.

•

Officials all around town are "fighting inflation." In fact, there's so much serious activity of this kind, that a few top officials are watching to see that it doesn't go too far. As yet there are few signs of this—construction activity for the first two months of this year, for instance, was 6% above a year ago.

White House and Treasury experts are wary of the possibility that quick, hard budget-cutting might pull enough props out from under the economy to tilt us into a downturn. If signs of such a slide appear, they want to be prepared to reverse their steps—be ready to use pump-priming construction and tax cuts to keep the slide under control.

•

Some favorable tax changes are in prospect for you this year—even though a tax cut seems more and more remote. Treasury chiefs on their own are planning to ease Bureau of Internal Revenue regulations to let contractors and other businessmen write off new equipment faster (see page 23).

•

St. Lawrence Seaway will come to a vote in the Senate by mid-April. The Wiley bill will let New York State and Canada build power plant, authorize sale of bonds to finance construction of the seaway.

Ex-Sen. Harry Cain of Washington is in line for Federal Housing Administrator under HHFA Administrator Albert Cole. Cain would suceed Franklin D. Richards.

•

Fear of aluminum shortage is causing fight over government proposals to resume stockpiling aluminum. Civilian demand for aluminum—including construction uses—is expected to be one-third higher this year than last. Industry officials say government stockpiling would mean that some private users would go without.

•

Overseas airbases: Sens. Russell Long and Wayne Morse won't fight the program, despite their recent highly critical report. They've had a change of heart, now say only that we should staff the bases with only enough men to keep them in standy-by condition.

The government-owned Oak Ridge and Handford communities are going to be sold. Atomic plant workers will get first crack at buying the houses. Commercial property will go to the highest bidder. The Atomic Energy Commission has asked the President and Congress to make the sales possible. AEC will keep the community at Los Alamos, the weapon center, for the sake of security.

•

Construction of pilot plants for atomic power is in sight. Atomic Energy Commission expects to ask Congress for money this year to finance plants of varying design. They'll cost about $10 million each.

It adds up to new business for contractors. Building of plants to make bomb materials is about finished. Savannah River and Portsmouth, Ohio, likely will be the last plants put up.

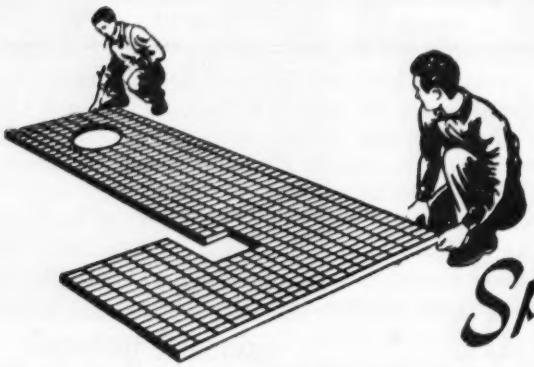

Specify Borden because

BORDEN MANUFACTURES EVERY TYPE FLOOR GRATING

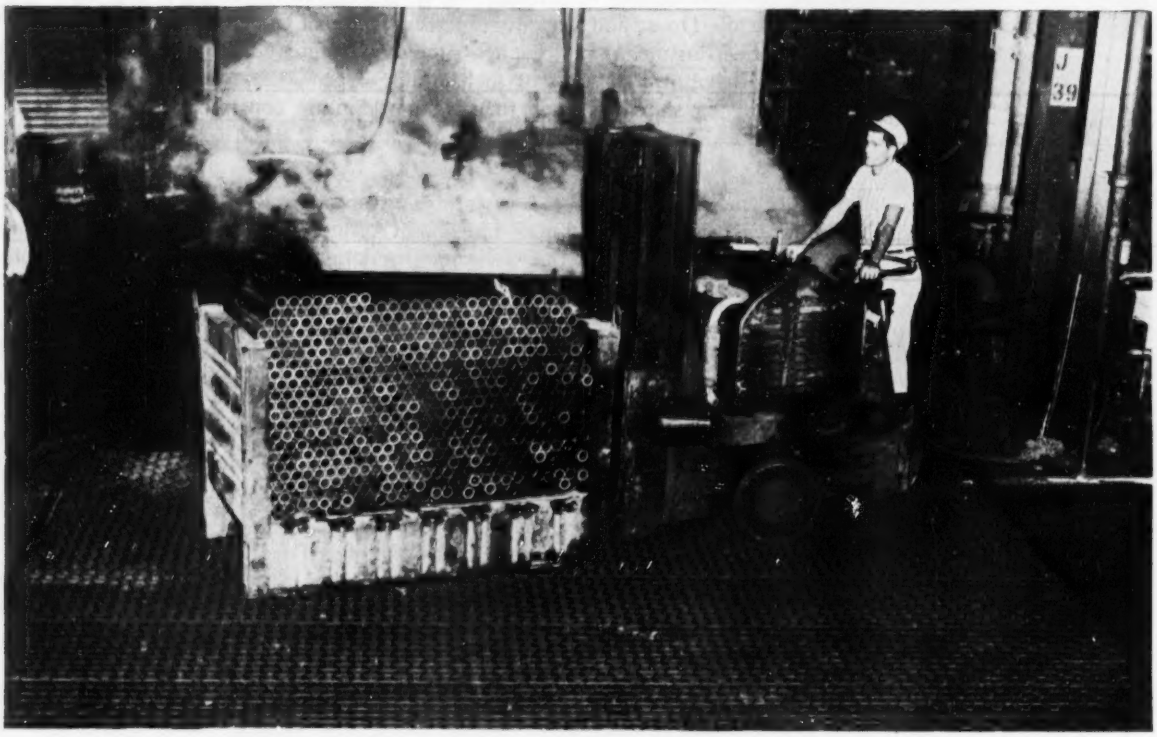

BORDEN SERRA-CRIMP grating has been especially designed to provide safe footing in places where the gratings are subject to excessive dampness, oil or grease. The crimp bars are serrated and raised slightly above the top surfaces of the bearing bars — providing positive footing at no decrease in strength. Shown above **BORDEN SERRA-CRIMP** grating in use in an area which had previously been very wet due to a tubing cleaning operation. Roadway type design supports weight of a loaded fork truck. *Photograph courtesy Tube Turns, Inc., Louisville, Kentucky.*

FOR THE BEST FLOOR GRATINGS — SPECIFY BORDEN

BORDEN METAL PRODUCTS CO.

815 GREEN LANE,
ELIZABETH, N. J.

Southern Division — Leeds, Ala.
Main Plant — Union, N. J.

SEND FOR FREE LITERATURE

describing services and features of Borden Floor Gratings.

Borden manufactures all three types of floor gratings, servicing from strategically located plants.

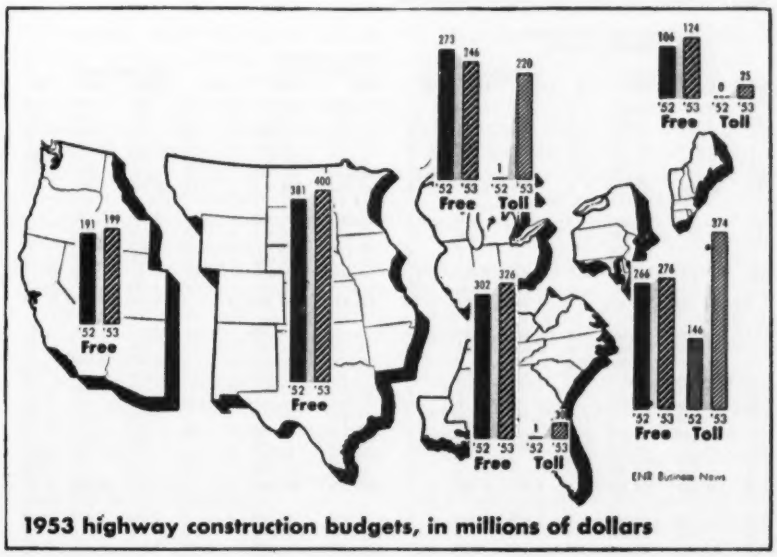

1953 highway construction budgets, in millions of dollars

'53 highway budgets exceed last year's record by 34%

Toll projects boost road building outlay—ENR survey indicates easing of most materials bottlenecks

Highway contracts to be let this year will add up to $2.2 billion, a 34%-increase over last year's all-time high, according to ENGINEERING NEWS-RECORD's annual survey.

State highway departments are scheduled to contract for $1.5 billion in new construction—3% over the 1952 figure. Another $658 million—compared with $148 million last year—has been budgeted for toll roads by turnpike authorities. (See table on following page.

Road building by state highway departments would have been up 9% this year, if a proposed New York state program of $160 million had not been cut back to $70 million in the budget recently presented to the legislature.

• **Toll road boom begins**—State highway departments will spend $531 million for maintenance of their roads this year. Of this amount, $50.8 million will be done by contract, or about the same proportion as last year.

Although the toll road looms large in the highway picture this year, it may represent only a modest beginning if even a small proportion of the schemes introduced into state legislatures this year should materialize. About half the 44 state legislatures now in session are confronted with toll highway proposals (ENR Jan. 8, p. 24, Feb. 12, p. 24).

Three states account for the bulk of the funds budgeted for toll road construction by nine turnpike authorities this year. They are New York, $230 million; Ohio, $220 million, and New Jersey, $100 million.

• **Supply outlook analyzed**—State highway departments have budgeted $39.4 million for purchase of new equipment this year—10% less than in 1952. This, however, is only for equipment used by highway department forces for maintenance of their roads.

Most state highway and toll authority officials are counting on adequate supplies of cement and reinforcing steel but are pessimistic over getting an adequate amount of structural steel for their bridge construction.

Ohio's state highway department reports the only current critical cement shortage. But, this is part of an inevitable materials and manpower shortage because of the impact of the billion-dollar atomic energy project at Portsmouth and the 241-mi toll highway project.

"Still, we anticipate being able to carry out new construction within the limits of at present available funds", reports Samuel O. Linzell, director of the state highway department.

Eleven states report a moderate cement shortage and eight are expecting the tight supply situation to persist through the year. Most of the highway departments now getting unsatisfactory deliveries of reinforcing steel anticipate an improvement.

Twelve states term structural steel in critically short supply and 31 others report a below-normal supply. Though 28 highway departments are counting on better delivery schedules later in the year, 15 expressed fear the shortage will continue.

• **Engineer shortage critical**—The outlook for getting more engineers looked grim all over the country. Twenty-six states reported the shortage of engineers critical and 19 others indicated they were inadequately staffed. At the same time construction labor supply is considered unsatisfactory to some extent in 19 states, with little hope of improvement.

• **Legislative proposals mount**—Among state highway officials, there is relatively little concern over getting equipment orders filled.

Despite this year's record high budgets for road building, the need for more highway funds is being emphasized with unusual vigor in state legislatures throughout the country. Aside from the multitude of toll road bills, a great variety of financing proposals have been put into the legislative hoppers. Gas tax increases and higher ton-mile levies on trucking are under consideration in a number of states.

Many state highway officials are coming to the conclusion that a more effective and more intensified public education program on the need for highway improvements on a big scale is necessary to get the support required

for any increased appropriations.

This was the consensus, for example, at the recent annual meeting of the Mississippi Valley Conference of State Highway Departments in Chicago—where highlight of the 14-state conclave was a panel discussion on "Why Americans have been unwilling to pay for adequate highways."

STATE HIGHWAY PROGRAMS 1952–1953

By State Highway Departments and Commissions

($ thousands, 000 omitted)

STATES	CONTRACTS Put Under Contract 1952	CONTRACTS Sched. for Contract 1953	%	MAINTENANCE By Own Forces 1952	By Own Forces 1953	%	By Contract 1952	By Contract 1953	%	Total Construction and Maintenance 1952	Total Construction and Maintenance 1953	%	New Equipment 1952	New Equipment 1953	%
Maine	$13,000	$14,000	+ 8	$6,500	$6,500	0	0	0	0	$19,500	$20,500	+ 5	583	500	− 14
New Hampshire	7,800	9,014	+ 16	4,900	4,800	− 2	200	100	− 50	12,900	13,914	+ 8	240	213	− 11
Vermont	4,800	5,600	+ 17	4,800	5,302	+10	0	0	0	9,600	10,902	+ 14	144	150	+ 4
Massachusetts	62,000	65,000	+ 5	14,810	14,810	0	520	520	0	77,330	80,330	+ 4	2,110	2,110	0
Rhode Island	7,000	8,000	+ 14	2,350	2,600	+11	0	0	0	9,350	10,600	+ 13	125	150	+ 20
Connecticut	10,900	22,000	+ 102	8,000[7]	9,270[7]	+16	350[7]	500[7]	+ 43	19,250	31,770	+ 65	185[7]	725[7]	+292
NEW ENGLAND	**105,500**	**123,614**	+ 17	**41,360**	**43,282**	+ 5	**1,070**	**1,120**	+ 5	**147,930**	**168,016**	+ 14	**3,387**	**3,848**	+ 14
New York	91,000	70,000	− 23	30,000	29,000	− 3	0	0	0	121,000	99,000	− 18	2,000	2,000	0
New Jersey	16,018[1]	23,147[1]	+ 45	8,300	8,500	+ 2	150	200	+ 33	24,468	31,847	+ 30	650	650	0
Pennsylvania	120,000	131,047	+ 9	31,534	35,000	+11	0	0	0	151,534	166,047	+ 10	1,500	1,500	0
Maryland	26,003	28,000	+ 8	5,709	5,823	+ 2	0	0	0	31,712	33,823	+ 7	839	1,043	+ 24
D. C.	3,500	14,000	+ 300	900	1,050	+17	900	1,000	+ 11	5,300	16,050	+ 203	91	92	+ 1
Delaware	9,000	10,000	+ 11	2,400	2,500	+ 4	500	500	0	11,900	13,000	+ 9	80	90	+ 13
MIDDLE ATLANTIC	**265,521[1]**	**276,194[1]**	+ 4	**78,843**	**81,873**	+ 4	**1,550**	**1,700**	+ 10	**345,914**	**359,767**	+ 4	**5,160**	**5,375**	+ 4
Virginia	26,000	30,000	+ 15	4,500[6]	5,500[6]	+22	3,500	4,000	+ 14	34,000[6]	39,500[6]	+ 16	2,381	1,750	− 27
West Virginia	18,000	15,000	− 17	14,000	14,000	0	2,000	2,000	0	34,000	31,000	− 9	100	70	− 30
North Carolina	38,500	40,000	+ 4	28,000	29,500	+ 5	0	0	0	66,500	69,500	+ 5	3,000	2,500	− 17
South Carolina	22,360	22,000	− 2	8,500	8,500	0	1,500	1,500	0	32,360	32,000	− 1	1,100	750	− 32
Georgia	38,101	45,000	+ 18	7,275	8,000	+10	0	0	0	45,376	53,000	+ 17	1,985	2,000	+ 1
Florida	33,500	46,881	+ 40	9,700	9,637	− 1	0	0	0	43,200	56,518	+31	1,000	125	− 87
Alabama	11,000	14,000	+ 27	7,250	7,300	+ 1	150	160	+ 7	18,400	21,460	+ 13	2,055	1,500	− 27
Mississippi	17,853	22,000	+ 23	4,685	5,140	+10	0	0	0	22,538	27,140	+ 20	370	580	+ 57
Louisiana	34,370	30,000	− 13	14,727	15,700	+ 7	400	300	− 25	49,497	46,000	− 7	600	500	− 17
Kentucky	31,700	31,000	− 2	13,500	15,250	+13	0	0	0	45,200	46,250	+ 2	369	750	+103
Tennessee	31,000	30,000	− 3	6,700	6,700	0	0	0	0	37,700	36,700	− 3	2,000	0	−100
SOUTHERN	**302,384**	**325,881**	+ 8	**118,837**	**125,227**	+ 5	**7,550**	**7,960**	+ 5	**428,771**	**459,068**	+ 7	**14,960**	**10,525**	− 30
Ohio	41,602	45,000	+ 8	22,485	22,000	− 2	7,035	7,500	+ 7	71,122	74,500	+ 5	1,346	1,425	+ 6
Indiana	30,000	30,000	0	10,000	10,000	0	0	0	0	40,000	40,000	0	0	0	0
Illinois	96,893	93,200	− 4	18,150	22,000	+21	2,650	3,200	+ 21	117,693	118,400	+1	2,100	2,050	− 2
Wisconsin	47,000	35,000	− 26	8,225	8,300	+ 1	1,201	950	− 21	56,426	44,250	− 22	0	0	0
Michigan	58,000	43,000	− 26	4,300	4,600	+ 7	12,000	12,700	+ 6	74,300	60,300	− 19	540	600	+ 11
MIDDLE WEST	**273,495**	**246,200**	− 10	**63,160**	**66,900**	+ 6	**22,886**	**24,350**	+ 6	**359,541**	**337,450**	− 6	**3,986**	**4,075**	+ 2
Minnesota	33,000	33,000	0	13,084	11,600	−11	3,000	2,500	− 17	49,084	47,100	− 4	743	600	− 19
Iowa	38,300	18,000	− 53	5,200	5,800	+12	2,800	2,800	0	46,300	26,600	− 43	1,000	1,000	0
Missouri	36,774	50,000	+ 36	14,297	15,500	+ 8	0	0	0	51,071	65,500	+ 28	1,707	1,975	+ 16
Arkansas	19,200	20,000	+ 4	8,000	8,000	0	0	0	0	27,200	28,000	+ 4	318	750	+136
North Dakota	10,800	11,000	+ 2	4,900	4,500	− 8	0	0	0	15,700	15,500	− 1	260	250	− 4
South Dakota	12,313[2]	14,500	+ 18	4,338	3,937	− 9	1,200	1,200	0	17,851	19,637	+ 10	474	500	+ 5
Nebraska	7,727[5]	4,535[5]	− 41	7,470	7,000	− 6	1,196	2,000	+ 67	16,393	13,535	− 17	604	670	+ 11
Kansas	30,712	32,000	+ 4	8,048	8,920	+11	2,464	2,500	+ 1	41,224	43,450	+ 5	735	829	+ 13
Oklahoma	35,080	44,658	+ 27	9,338	3,286[5]	−65	262	0	−100	44,680	47,944	+ 7	800	800	0
Texas	102,000	106,000	+ 4	23,000	24,000	+ 4	0	0	0	125,000	130,000	+ 4	3,400	2,600	− 23
Montana	10,511	11,884	+ 13	6,457	6,370	− 1	425	575	+ 35	17,403	18,829	+ 8	441	400	− 9
Wyoming	9,500	11,500	+ 21	2,500	3,000	+20	0	0	0	12,000	14,500	+ 21	500	500	0
Colorado	21,000	26,000	+ 24	3,085	3,655	+18	0	0	0	24,085	29,655	+ 23	687	393	− 43
New Mexico	14,500	16,500	+ 14	3,837	4,184	+ 9	1,225	1,066	− 13	19,562	21,750	+ 11	600	550	− 8
WEST OF THE MISSISSIPPI	**381,417**	**399,577**	+ 5	**113,564**	**109,782**	− 3	**12,572**	**12,641**	+ 1	**507,553**	**522,000**	+ 3	**12,269**	**11,817**	− 4
Idaho	10,500	16,000	+ 52	2,700	3,390	+26	1,500	910	− 39	14,700	20,300	+ 38	400	400	0
Utah	11,057	11,000	− 1	3,743	3,500	− 6	0	0	0	14,800	14,500	− 2	733	702	− 4
Arizona	12,927	14,000	+ 8	1,950	2,150	+10	0	0	0	14,877	16,150	+ 9	365	400	+ 10
Nevada	7,087	10,585	+ 49	1,800	1,955	+ 9	268	200	− 25	9,155	12,740	+ 39	223	250	+ 12
Washington	33,000	41,000	+ 24	9,500	10,000	+ 5	0	0	0	42,500	51,000	+ 20	0	0	0
Oregon	31,200	24,000	− 23	9,300	9,300	0	1,700	2,000	+ 18	42,200	35,300	− 16	1,235	1,100	− 11
California	85,114	82,416	− 3	22,630	24,000	+ 6	370	0	−100	108,114	106,416	− 2	1,400	1,000	− 29
FAR WEST	**190,885**	**199,001**	+ 4	**51,623**	**54,295**	+ 5	**3,838**	**3,110**	− 19	**246,346**	**256,406**	+ 4	**4,356**	**3,852**	− 11
UNITED STATES, FREE	**1,519,202[1]**	**1,570,467[1]**	+ 3	**467,387**	**481,359**	+ 3	**49,466**	**50,881**	+ 3	**2,036,055**	**2,102,707**	+ 3	**44,118**	**39,492**	− 10

CONSTRUCTION PROGRAMS, TOLL ROADS,

By Turnpike, Parkway, Thruway Authorities or Commissions

STATES	CONTRACTS Put Under Contract 1952	CONTRACTS Sched. for Contract 1953	%	MAINTENANCE By Own Forces 1952	By Own Forces 1953	%	By Contract 1952	By Contract 1953	%	Total Construction and Maintenance 1952	Total Construction and Maintenance 1953	%	New Equipment 1952	New Equipment 1953	%
Maine	0	25,000	.....	150	150	0	0	0	0	150	25,150	+16,767	5	25	+400
NEW ENGLAND	**0**	**25,000**	.....	**150**	**150**	**0**	**0**	**0**	**0**	**150**	**25,150**	**+16,767**	**5**	**25**	**+400**
New York	136,000	230,000	+ 69	0	0	0	0	0	0	136,000	230,000	+ 69	0	0	0
New Jersey	8,431	100,000	+ 1,086	0	0	0	0	0	0	8,431	100,000	+ 1,086	0	0	0
Pennsylvania	1,685	38,805	+ 2,203	0	0	0	0	0	0	1,685	38,805	+ 2,203	0	0	0
Delaware (State)	0	5,000[7]	.....	0	0	0	0	0	0	0	5,000[7]	.....	0	0	0
MIDDLE ATLANTIC	**146,116**	**373,805**	+ 156	**0**	**0**	**0**	**0**	**0**	**0**	**146,116**	**373,805**	+ 156	**0**	**0**	**0**
West Virginia	200	30,000	+13,536	0	0	0	0	0	0	200	30,000	+13,536	0	0	0
Mississippi	794[7]	9,200[7]	+ 1,059	0	0	0	0	0	0	794[7]	9,200[7]	+ 1,059	0	0	0
SOUTHERN	**994**	**39,200**	+ 3,844	**0**	**0**	**0**	**0**	**0**	**0**	**994**	**39,200**	+ 3,844	**0**	**0**	**0**
Ohio	1,163	220,000	+18,816	0	0	0	0	0	0	1,163	220,000	+18,816	0	0	0
MIDDLE WEST	**1,163**	**220,000**	**+18,816**	**0**	**0**	**0**	**0**	**0**	**0**	**1,163**	**220,000**	**+18,816**	**0**	**0**	**0**
Oklahoma	4,000	n. a.	—	0	200	....	0	0	0	4,000	n. a.	—	120	60	− 50
WEST OF THE MISSISSIPPI	**4,000**	**n. a.**	—	**0**	**200**	....	**0**	**0**	**0**	**4,000**	**n. a.**	—	**120**	**60**	**− 50**
TOTAL TOLL	**148,273**	**658,005**	+ 344	**150**	**150**	**0**	**0**	**0**	**0**	**148,423**	**658,155**	+ 343	**125**	**85**	**− 32**
TOTAL FREE & TOLL	**1,667,475**	**2,228,472**	+ 34	**467,537**	**481,509**	+ 3	**49,466**	**50,881**	+ 3	**2,184,478**	**2,760,862**	+ 26	**44,243**	**39,577**	**− 11**

• / fiscal year • [1] N. J. 1st half only only proj financed with state & fed funds • [2] Plus $4,811 for bridge & access road, 100% fed • [3] Incl city-co-fed fund proj put under contract by state • [4] Incl • [5] bit & conc repairs only • [6] $30,000 more spent 1952 for secondary & primary highway maintenance, $31,500 est. for 1953 • [7] State Highway Dept.

Professional licensing laws attacked

Colorado courts throw out both engineers' and architects' licensing laws—Connecticut considers amendments—New York delays action on corporation practice

Colorado courts this week had declared unconstitutional that state's laws regulating engineers and land surveyors and architects, as attacks on provisions of state licensing laws appeared to be on the increase.

In New York State, where the controversial Bennet-Carlino Bill (ENR Mar. 12, p. 21) was being hotly debated, upper and lower state legislature committees were still debating reports on the measure as the week started. The new bill would amend the 35-year-old existing law to permit corporate practice of professional engineering by corporations formed since the original law went into effect.

And in Connecticut, the state legislature had before it two bills—one affecting the practice of architecture, and the other engineering.

• **Colorado decisions**—The two rulings in Colorado apparently left the state with no laws at all to govern the practice of engineering or architecture.

One ruling—on engineers and land surveyors—was handed down by the state Supreme Court; the other—on architects—came from a district court. Both decisions declared the laws unconstitutional on the basic ground that they delegate illegal legislative powers to state commissions.

In tossing out the engineers' law, the Supreme Court said that action by the State Board of Examiners for Engineers and Land Surveyors to classify engineers as to specific branches of their profession is illegal assumption of legislative powers.

The case was said by local observers in Denver to be a clear-cut victory for Kenneth A. Heron, Denver mining, hydraulic and structural engineer, who waged a four-year legal battle to prevent the state board from issuing rosters and licensing cards showing that he was "especially qualified to practice in the branch of civil engineering. Heron argued that this was a "qualified limitation" and demanded that his name be carried on the board's records as a "professional engineer," without qualification.

The Supreme Court, upholding a Denver district court decision, ruled that a 1951 amendment authorizing the state board to classify engineers was unconstitutional also on the ground that it deprived Heron of a "valuable right" (to the listing as "professional engineer") without due process of law.

"No definition of any particular branch of engineering is contained in this statute, and no standards are fixed . . . by which a classification could be made," the court commented. "Without standards fixed by law, the discretion to declare what the law is is delegated to the board. This cannot legally be done."

• **Architects' law**—The ruling of the district court in Denver on the architects' licensing law climaxed an involved court fight that started almost exactly a year ago.

Then James H. Johnson of Lakewood, Colo. filed suit against the State Board of Architect Examiners on the ground that he had been denied license by the board. Seven similar suits were filed subsequently. One of these subsequent suits—filed by Nat Sachter, 33-year-old Denver engineer, who claimed he had been refused architect's license on "arbitrary grounds"—was the basis of the court's decision.

Justice William A. Black of the district court based his decision on the legal ground that the 1909 law lacks "standards and requirements" for architects.

• **New laws up**—The Colorado court decision added a new phase to a legislative fight already in progress over two versions of a new architect licensing law.

One measure, backed by architects already licensed would require that the board of examiners be constituted of five architects, as at present. It would also grant the board broad authority in examining powers. The other measure—backed by many of those who unsuccessfully have sought licenses—would create an examining board of three architects, an engineer and a public member; would grant architect's licenses to persons who do not have degrees in architecture, if they have been "employed, engaged or experienced" for not less than six years in the office of an architect qualified or registered in Colorado.

• **Connecticut problems**—In Connecticut, two amendments to existing law—one affecting professional engineering, the other architecture—had been dropped into the legislature's hopper.

The architecture measure (HB 210) would amend the present law to permit—among other things—the practice of architecture by a professional engineer, and performance by professional engineers of architectural work that may be incidental to their engineering work.

The other measure (HB 1421) would permit corporate practice of professional engineering, if the chief executive officer of the corporation is a licensed professional engineer.

• **New York**—In Albany, the Assembly Rules Committee and the Senate Education Committee were still wrestling with an amendment to the state's law that would permit corporate practice. The committees were expected to report the bill out for vote this week.

Meanwhile, Assemblyman Joseph F. Carlino, of Nassau County, speaking in favor of the amendment of which he is co-sponsor, told legislators that in New York City alone, more than 315 engineering corporations have been operating, and are now forced out of business by provisions of the existing law.

Attempt to halt concrete bids in Ohio fails

Asphalt interests were rebuffed last week in their efforts to keep the Ohio Turnpike Commission from advertising for bids and awarding contracts for concrete paving until a pending court decision has been rendered.

Ohio's Second District Court of Appeals declined to act on a request for a temporary injunction until it has heard arguments on the report of a court referee, which held that the turnpike commission is obligated to take competitive bids for both asphalt and concrete work on the 241-mi toll road (ENR Feb. 26 p. 21, March 5 p. 24).

The injunction was requested by Richard H. Shafer, president of the Ohio Road Improvement Co., who brought the suit against the commission on behalf of the asphalt interests. Shafer had asked the Appellate Court either to enjoin the turnpike commission from letting any more contracts excluding asphalt pending the court's decision, or order the commission to let asphalt bids.

Despite the referee's findings in favor of admitting both asphalt and concrete bids, the turnpike commission is going ahead asking bids for concrete only. It plans to open bids on four sections of the turnpike totaling 16.8 mi this week and on five sections totaling 21.1 mi April 1.

A court ruling upholding the referee's findings would cripple turnpike construction this season seriously. It would be necessary to withdraw the contracts already let and recall those issued, and to revise specifications to include asphalt.

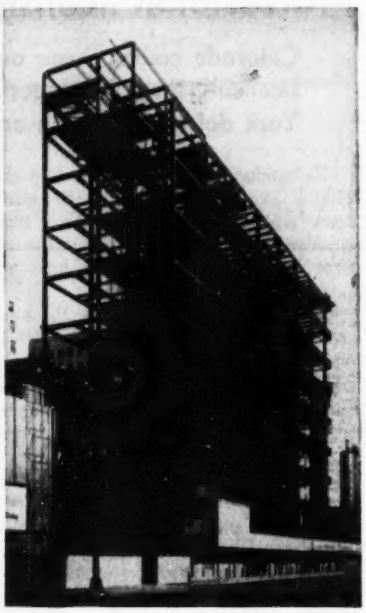

STEEL FRAME CONSTRUCTION (above) is far from a rare sight in Dallas, Texas, which is experiencing a near-boom in office building. Sixteen buildings have been erected at a cost of $30 million since 1945. Future plans call for $51 million worth of construction which will provide a total of 3,400,000 sq ft of rentable space.

NEW BUILDING for the Standard Federal Savings and Loan Assn. of Los Angeles is one of the few new, tall office buildings which are being built on the West Coast at the present time.

Potential demand for big-city office space is running high

ENR survey shows scarcity of construction due to prohibitive building costs and parking problems

Existence of high potential demand for new office space is pointed up in an ENR survey which shows an average occupancy rate of 97% in major downtown office buildings in 15 key cities. And, in several cities the rate is well over 99%.

With a few exceptions, the cities surveyed had little or no major office-building under way or even planned. Realtors are unanimous in blaming this on high construction costs. As an architect in Cleveland put it, "The real factor is that going rental rates simply do not justify construction of new office buildings."

Speculative office-building ventures inevitably have become rare in most cities. Current construction is almost entirely for owner occupancy and pre-arranged tenancy. Insurance companies are the principal source of capital but are also the principal tenants of many of the new structures.

• **Parking is handicap**—Another factor dampening the enthusiasm for shiny new offices is the downtown parking dilemma that plagues most cities. Little has been done to require parking facilities with each new building, and many city building codes still prohibit garaging in buildings.

New York and Dallas are exceptions to the let-down in office-building construction that characterizes most of the cities surveyed.

Dallas has been experiencing the closest thing to a boom and now looks as though it might outbuild its needs, which only a year ago were termed by its Chamber of Commerce "the most critical in 20 years." Sixteen multiple-story structures completed since 1945 at a cost of $30 million have added 1,600,000 sq ft to the city's office space. Other buildings now under construction or for which plans are being drawn will provide another 1,800,000 sq ft of net rentable space at a cost of about $51 million. Among these will be a 50-story structure.

Says Dallas real-estate man Thomas C. Hudson: "Office space is now abundant in this city. Already there are vacancies in new construction and heaven knows where we'll get the tenants to fill the buildings now going up or on the drawing board."

• **Manhattan keeps going**—Construction is keeping New York City a jump ahead of an occupancy rate of 99.7% as of last May. Five new buildings under construction will bring in 1,700,000 sq ft of space by early 1954, including four structures averaging 25 stories. Plans have been filed for 11 other Manhattan build-

ings ranging from 16 to 25 stories, with an anticipated floor area of 4,700,000 sq ft.

New York tenants, particularly, are willing to pay rentals well above the rates prevailing in the rest of the country. Whereas $4.50 per sq ft is the very top figure in other cities covered by the ENR survey, it tends to be the minimum for first-class office space in Manhattan, with some tenants willing to pay as high as $8 for offices in towers. Texans, too, are paying as high as $6 per sq ft for plush office space. And, in Chicago, rates are found to range from the norm of $3.50 to $6.

Air conditioning is no longer considered a luxury by tenants moving into new buildings in New York and Chicago and in the larger Southern cities like New Orleans, Houston, Dallas and Lousiville. In other parts of the country, however, tenants generally are not willing to pay higher rents for this service. Tenants in most cities above the Mason-Dixon Line prefer to purchase and install individual window air-conditioning units rather than pay the higher rents associated with a central air-conditioning system.

• Effects of decentralization—Urban decentralization trends are having an indirect effect on large office-building occupancy and construction. In many places, small buildings are springing up in outlying areas of the city. For example, in Detroit, where no major downtown privately owned office buildings are under construction or planned, there is considerable one and two-story office construction on the outskirts.

Kansas City offers a good example of this trend. Marley Corp., cooling tower engineers and manufacturers, has built a 25,000-sq ft structure right in the heart of the residential section of south Kansas City. Interstate Bakeries put up a building of similar size in the midst of the mid-town apartment belt. Five insurance companies have followed this trend and have built or leased new buildings which are located on the outskirts.

Where the type of business permits, many concerns are locating branch offices in suburban shopping-center developments in preference to expanding downtown office space. Suburban shopping centers likewise are attracting professional men, real estate and insurance brokers and other small business and service enterprises, thus alleviating some of the pressure for downtown office space.

• Conversion possibilities—An outstanding illustration of the "make do" philosophy toward the office-space problem is the tremendous amount of building conversion that has taken place in Cleveland—here more than a million sq ft of centrally located office area has been added without putting up any new buildings.

The top five floors of the 10-story Midland Building Garage, totaling 200,000 sq ft, have been converted to offices. The Cleveland Electric Illuminating Co. joined a building of its own with an old Parcel-Post building, creating attractive, efficient office accommodations.

OCCUPANCY RATES AND PREVAILING RENTALS IN 10 CITIES

City	%	Dollars per sq ft per year
Boston	96	2.50 to 3.00
New York	99.3	4.50 to 8.00
Chicago	97.15	3.50 to 6.00
New Orleans	99.5	3.50 ±
Louisville	99	3.50 ±
Detroit	95.6	3.00 to 6.00
Cincinnati	96	3.50 to 4.50
San Francisco	98	3.00 to 5.50
Seattle	97	3.00 to 4.50
Kansas City	97	2.75 to 4.50

• Parking ordinances—A good percentage of the large new office buildings are providing parking facilities of some kind, generally as annexes or as detached facilities.

Only two of the cities surveyed—St. Louis and Los Angeles—have ordinances requiring parking provisions for new office buildings, although even here the facilities are not required to be within the buildings.

Most cities have not changed their building codes to allow for garaging within buildings. According to reports from Seattle, the prohibition against garaging in office-building structures is actually responsible for lack of interest in putting up high downtown buildings.

• Chicago blossoms out—Among the important cities included in this ENR survey, which have no extensive office-building construction in view, are Detroit, Cleveland, Cincinnati, Milwaukee, Boston, Los Angeles and Seattle. St. Louis, which is also in this category, has had no new large office building since 1926.

Chicago is only now breaking a 20-year famine in new office facilities. Now under construction is the city's tallest building, the 41-story future home of Prudential Life Insurance Co. This will make a million sq ft of rentable space available in addition to Prudential's own needs.

The occupancy rate in San Francisco has been between 97% and 99% for the past five years. There are practically no vacancies in Class A buildings but they are starting to show up in Class B and C buildings and in the fringe areas. Some big concerns are talking of moving down the peninsula; many are operating inconveniently in several locations.

Yet, only one major building is in view right now. That's the 26-story structure to be built by the Equitable Life Assurance Society of America. The $10-million building will take the last available piece of valuable property in the financial district. The owner will occupy 35,000 sq ft of the 300,000-sq ft space, leasing the remainder.

• New Orleans keeping pace—An acute postwar office-space shortage will be alleviated soon in New Orleans. Completion is expected this year of a 17-story Texaco building with 100,000 sq ft, and work has begun on a 14-story Shell Oil building of 140,000 sq ft. However, developers and business leaders feel that industrial expansion in the New Orleans area foreshadows another tight office space situation in 1955.

Houston has not enjoyed as extensive a boom as its sister Texas city of Dallas. Office space there has been and still is critical, despite a total of 1,500,000 sq ft of space completed since the war. Buildings completed last year and thus far in '53 are 99% occupied. This year's plans include at least three big projects.

Louisville badly needs a 19-story addition on which work is scheduled to begin April 1. This will provide 192,000 sq ft. Present occupancy rate is 99.7%. It is estimated that 200,000 to 300,000 sq ft of office space could be rented easily and, according to the Chamber of Commerce, there is certain need for 100,000 sq ft of Class A space.

Yet, Louisville can't find any interested investors. According to A. J. Stewart, head of the Citizen Fidelity Bank's real estate department, the ratio of obtainable rents to land and construction costs is too unfavorable, in spite of the potential demand as indicated above.

Revision of equipment depreciation rates studied by Treasury experts

Tax relief for contractors—by giving owners of machinery and equipment more latitude in setting depreciation rates—is being studied by Treasury Department experts.

Contractors have long protested that the present formula for depreciation is too rigid. For one thing, it doesn't allow for the rapid deterioration of expensive construction equipment in the early years of its use.

The life of a 20-ton crane, for example, is given in the Treasury Department's Bulletin F, the official guide on depreciation rates, at 12 years. If the usual straight-line method of depreciation is used, it means taking one-twelfth of the total write-off each year. Actually, the equipment loses most of its re-sale value in the early years.

• **Hard to get around**—If the contractor tries to get around this by using the so-called declining-balance method of figuring the depreciation, he often loses in the long run. Under this system, the rules limit him to a rate of depreciation which is 150% of the straight-line rate. This lets him take a 50% greater deduction the first year, but he can't take that amount each year. The deductions decrease rapidly, because each year the tax base of the equipment becomes less by the amount of all the depreciation taken to date. This means that 20% or more of the equipment's original cost goes unrecovered.

One suggestion for solving this problem is to allow contractors to take the complete write-off over two-thirds of the life of the equipment—in the case of a heavy crane, one-eighth of the total depreciation for eight years instead of one-twelfth over 12 years.

• **Compromise favored**—There's little support in Treasury circles, so far, for letting owners set their own rate of depreciation—taking the total write-off the first year if they want to. Present thinking favors some sort of a formula to force taxpayers to spread the depreciation out, but the new Treasury officials do not want to give taxpayers more latitude than at present.

The catch in this is that revenue is almost certain to drop in the early years of any liberalized depreciation policy.

Treasury experts think businessmen will gamble on a gradual decline from the present high rates, and crowd any new formulas for all they are worth in the early years. This would mean less taxes for them right away and less revenue for the government.

• **Depends on budget**—This means that liberalization depends on the over-all budget picture. Balancing the budget is still the Administration's number one economic goal. It comes ahead of any kind of tax reductions, and ahead of tax reforms which would reduce revenues for a period of even a few years.

Pennsylvania Turnpike safety report made

About 85% of the accidents on the Pennsylvania Turnpike are due to human error and the peak in traffic mishaps occurs at speeds between 41 and 50 mph, according to preliminary findings of a long-range research project being conducted by the Turnpike Commission.

The findings were introduced last week into testimony being taken by a joint legislative committee investigating the turnpike's safety measures.

The traffic survey—believed to be the most exhaustive of this nature ever undertaken—is not due to be completed for another year. It is being conducted by a research group formed by the Turnpike Commission last October.

Involved in the study are the Union Switch and Signal Division of Westinghouse Air Brake Co., the J. E. Greiner Co. of Baltimore, consulting engineers to the turnpike, and the American Institute for Research, Pittsburgh.

Preliminary conclusions were based on an analysis of the State Police reports on each of the 6,454 passenger cars and 3,733 commercial vehicles involved in accidents occurring during the 11½ years the turnpike has been in operation.

It was found that less than one percent of the passenger cars involved in accidents were traveling at the top speed limit of 70 mph and, no truck involved in an accident was reported moving at 70 mph.

Accidents involving the median strip—a problem that has been dealt with at length by witnesses appearing at the legislative hearings—accounted for only 8% of the turnpike's traffic mishaps since its opening.

ENR office gets high-level lighting

Remodeling of Engineering News-Record headquarters in the McGraw-Hill Building, New York City, included installation of lighting system that features high-intensity illumination with seeing comfort. Continuous lines of louvered fixtures, each equipped with two 75-w, 8-ft long fluorescent lamps, provide more than 100 ft-c at desk level. Spaced about 6 ft apart, the fixtures throw more than 50% of the light upward, to be reflected from the ceiling. The installation cost less than $1.60 per sq ft. Berlon C. Cooper, associate editor, Electrical Construction and Maintenance, was consultant to the McGraw-Hill Building Corp. on the design.

Also included in the remodeling job were movable modular desk units for the editors. L-shape in plan, equipped with book shelves and glass partitions, the desks form offices of a convenient size.

CONTRACT FOR GAVINS POINT DAM work is signed by Col. H. S. Miller, Omaha District Army Engineer. Looking on is John C. Hays, area engineer in charge of the project. The dam is located about four miles upstream from Yankton on the South Dakota-Nebraska border.

A handy dredge pays off handsomely

Use of "Western Chief" gives low bidders $3-million edge over competitors for Gavins Point Dam contract

"Western Chief"—versatile dredge that made construction history at Fort Randall Dam on the Missouri River in South Dakota—now promises to pay another big dividend to its owner, Western Contracting Corp. of Sioux City, Iowa.

The dredge, it turns out, was chiefly responsible for giving Western and two associated firms a $3-million edge over their nearest competitors in bidding on Stage 2 work on Gavins Point Dam—another Army Engineer project located 100 mi downstream from Fort Randall Dam.

Contract award for continuing work on Gavins Point Dam was made by special authorization of the Secretary of the Army (ENR Mar. 12, p. 27). It is the only large federal construction job to be released to date from the Administration's recent budget freeze order.

The Western group including J. A. Jones Co. of Charlotte, N. C., and Massman Construction Co. of Kansas City, Mo., got the contract on a bid of $17,525,046 as against the next two low bids of $20,570,889 and $20,754,-164. The successful bidders were more than a million dollars under the government estimate of $18,765,798.

"Western Chief," the world's most powerful suction dredge, has been standing by at Fort Randall since completing operations there last summer. It will now be floated downstream to go to work chewing away Lewis and Clark's historic Calumet Bluff to make way for the Gavins Point Dam spillway and to cut a downstream outlet channel.

Although the outstanding feature of the dredge is its portability, Western Contracting Co. has come up with an ingenious plan for floating it to its new job. The dredge takes a nine-foot draft and this reach of the Missouri is extremely shallow. The solution: plug sections of the 36-in. spoil pipe and lash them to the hull to buoy it up pontoon-fashion.

"Western Chief" was fabricated in sectional assemblies for use at the Fort Randall Dam project (ENR Dec. 20, 1951, p. 36, Feb. 7, 1952, p. 38). The 1,500-ton dredge has 20 hull sections. Its heaviest piece is a 125-ton section of the ladder. Components were shipped by rail and trucked to the dam site. Assembly was done in a dry pit during the period between November, 1950, and April, 1951 (ENR Aug. 14, 1952, p. 39).

ASCE revises method of distributing papers

The American Society of Civil Engineers has revised its publications distribution system to enable a greater number of technical papers to be issued and to cut the time between acceptance of a paper and its release.

A paper found acceptable by the executive committee of any technical division will not be subjected to further screening at ASCE headquarters but will be typed there for reproduction by photo-offset. Copies will be sent automatically to all members of the division in which the paper originated and will be listed in the society's magazine, "Civil Engineering", as available. Members of other divisions may obtain copies under the existing distribution system, whereby members make specific requests for each published paper.

25-mile water supply tunnel holed through

New York's Delaware water supply was one step closer to completion last week when Walsh Construction Co. holed through on the 25-mi East Delaware Tunnel.

To serve as an outlet for Pepacton Reservoir, the tunnel will be one of two that will bring water to Rondout Reservoir, whence it will go 80 mi southeastward through the Delaware aqueduct to New York City.

The second tunnel, running 5 mi from Neversink Reservoir to Rondout, is substantially complete. Both Neversink and Pepacton Reservoirs are in the Delaware River Watershed.

East Delaware Tunnel work began in December 1949, operations being conducted from both portals and both ways from two shafts. Portal sections were holed through during the past year, last week's closure between the shaft being the final one. The tunnel is scheduled to be completed in the late summer of 1954.

Toll bridge work starts

Quiet, informal ground-breaking ceremonies for an engineering office last week marked the start of the San Rafael-Richmond bridge across the north arm of San Francisco Bay, a sharp contrast to the bitter and noisy controversy over whether or not the bridge should be built at all.

Once the $62 million in bonds were sold and the contracts were let, (ENR Mar. 5, p. 24) the California Toll Bridge Authority swung quickly into the job of getting the work started.

New federal construction projects offer best hopes for budget cuts

Size and flexibility make military programs easier to cut than civil works proposals

Eisenhower budget cutters are searching out the fat that can be cut off government construction programs without hurting the defense effort or running up a bigger final cost for needed projects.

They're finding that cutting construction programs is a tough job. Any real savings have to come out of new starts. And the only agencies with substantial programs of new projects are the military services. Those projects already have undergone close screening and sharp pruning by the Defense Department—before Congress authorized them.

But the sheer bulk of the military construction program does offer opportunity for cuts. Looking at a backlog that totals some $7.5 billion of authorized work—of which about $4 billion has been funded but not yet placed under contract—military budget cutters can find places to use a knife.

Overall military planning has to be kept flexible, and conditions affecting certain projects have changed since the jobs were authorized. Some projects could be dropped, but many of them would have to be replaced with alternate installations. And a number of proposed projects probably could be cut even closer to bare essentials.

• **Civil works cuts harder**—These possibilities offer a chance for some sizable cuts in presently authorized and funded military construction. The Truman budget estimated nearly $2.6 billion of military construction spending in fiscal 1954. New contract awards, on the basis of present planning, might run close to the same total. Both of those figures can be reduced by sharp budget cutting.

Construction cuts in the government's civil works programs are harder to make. There will be departmental savings through reductions in civilian personnel for such agencies as the Reclamation Bureau, the Corps of Engineers and the Bureau of Public Roads. But cutting the rate of spending on construction is more difficult.

• **Looking into airports**—Efforts are being made in that direction. Last week, for example, it was reported that the Commerce Department would recommend discontinuing federal aid for new airport projects. But this week the department says that no such shutoff is being recommended and that nothing of the sort would even be considered until Secretary Weeks confers with Budget Director Dodge. A conference is scheduled for late in the week.

Federal aid to highways is a much larger item in the Commerce Department Budget. Congress has authorized highway aid of $575 million a year for fiscal 1954 and fiscal 1955. With some governors demanding full restoration of gasoline taxing power to the states and cessation of federal aid, the prospect here opens wide possibilities for action by Congress and the administration. It is unlikely that the Executive Branch will propose any changes until the Bureau of Public Roads has been revamped by the incoming commissioner (ENR March 12, p. 28).

• **Revised civil budgets**—Civil departments of the government have submitted revised budgets for fiscal 1954, as requested by Director Dodge (ENR Feb. 12, p. 21, and Feb. 19, p. 43). The revisions show meager savings for the next fiscal year through stopping new projects. The Budget Bureau and the departments are reviewing the various budgets to see where other construction cuts can be made, particularly on jobs recently awarded.

Federal construction rolls ahead without too much impediment except for the freeze on bid advertising in the Defense Department.

New and revised materials standards recommended by ASTM committees

Many new and revised specifications and tests for materials were completed by committees of the American Society for Testing Materials during some 300 technical group meetings conducted in Detroit the week of March 2-6.

Development of a specification for slag cement was authorized at the meeting of Committee C-1 on cement.

• **Fly-ash admixture**—Proposed specifications for fly ash and for lightweight aggregates in concrete featured the discussions of Committee C-9 on concrete and concrete aggregates. The subcommittee on admixtures recommended acceptance for committee letter ballot of a proposed test method for fly ash as an admixture to portland cement. A proposed specification is being referred back to the subcommittee for further study.

Considerable progress toward development of a complete revision of the existing specifications for lightweight aggregate (C130) was reported by the subcommittee on this subject. It reviewed drafts for three separate specifications, covering lightweight aggregate for insulating concrete, structural concrete and concrete masonry units. Acceptance of these specifications probably will be recommended to Committee C-9 for action at the 1953 ASTM annual meeting June 29.

Three proposed methods of tests for resin cement mortars were approved, subject to letter ballot, by Committee C-3 on chemical-resistant mortars at a New York meeting on March 11.

• **Resin mortar tests**—Two of the proposed methods are for determining tensile strength and compressive strength of resin mortars. Although these mortars are not usually under tension when in service, it is felt that tension data would be useful for purposes of determining the rate of cure and other significant properties of mortar.

The third proposed method contains procedures for measuring working and setting times of chemical-resistant resin cement mortars with the setting time procedure including both initial and final time of set determinations.

• **Concrete reinforcing**—Committee A-1 on steel met earlier in Birmingham, Ala. The subcommittee on structural steel has been cooperating with the General Services Administration and the American Welding Society in developing a suitable specification for weldable steel. At present, it was announced, comments are being submitted on Interim Federal Specifications Q-s-00741 and Q-s-741.

A tentative revision to Standard Specification A 185 for welded steel wire fabric for concrete reinforcement was recommended, including the addition of definite weld tests and procedures to limit the weld strength in shear for fabric to a minimum of 35,000 psi, based upon the area of longitudinal wire. In addition a better definition of "maximum average spacing" was recommended for Specification A 305 covering minimum deformation requirements for deformed concrete reinforcement bars.

Atomic labor panel to be reorganized in the midst of many pending disputes

Sudden dismissal order catches officials off-base as panel is put into FMCS awaiting changes

The Atomic Energy Labor Relations Panel that has mediated disputes affecting atomic energy production for the last four years is being reorganized. President Eisenhower, anxious to reduce the number of government agencies, is placing the panel in the Federal Mediation and Conciliation Service and probably will keep some of the same panel members whose resignation he suddenly accepted last week. A final decision is expected this week.

For a while there was considerable concern at the Atomic Energy Commission and in atomic management and labor circles that the panel was being abolished. Perfunctory resignations "at the pleasure of the President" had been on Eisenhower's desk since he took office. Then on March 6 he accepted the resignations, retroactively to Feb. 28, without appointing any successors. This tied the panel members' hands on disputes already before them and left the industry without any panel at a time when several strikes threatened.

UNINFORMED of the changes proposed in the Atomic Energy Labor Relations Panel was Secretary of Labor Martin P. Durkin.

• **Reaction**—The AFL Metal Trades Department, whose affiliates represent workers at Oak Ridge, Hanford and other AEC installations, reacted quickly. Its president, James Brownlow, notified the President that the AFL unions would consider themselves released from their no-strike pledge. They gave the pledge when the panel was created in 1949 after a congressional inquiry into the threatened Oak Ridge strike in 1948 and atomic energy labor relations generally. The CIO chemical workers and other unions having agreements with AEC contractors were prepared to follow suit.

The White House apparently had pulled a boner. Secretary of Labor Martin P. Durkin had not been consulted. AEC knew what was coming, but did not concur. White House aide Sherman Adams moved quickly to save the situation and prevent serious damage. He got FMCS chief David L. Cole—whose status as a Truman holdover still is in doubt—to straighten things up.

Cole met with the two chief panel members, Chairman William H. Davis and John T. Dunlop, and the three of them conferred with Durkin. Davis then had a session with Adams. This was followed by a meeting of Adams, Cole and Lewis L. Strauss, former AEC member and new special assistant to Eisenhower on atomic matters. It was decided to keep the panel, but put it in FMCS "for housekeeping purposes."

Details were to be worked out this week. One of the problems is to make sure that the panel is independent and completely separate from FMCS in its policies and procedures. Reason: The atomic panel makes recommendations in disputes it handles and sometimes acts as arbitrator. Federal Conciliators do not.

• **Troubles**—The panel had just helped settle a wildcat strike of 150 plumbers at Oak Ridge and got a machinists' union picket line off the Hanford project when Eisenhower accepted the resignations. Dunlop was still working on jurisdictional problems at the new construction site at Portsmouth, Ohio, and refusal of teamsters to deliver non-union gas at Paducah.

Wage negotiations are in progress at Hanford and at the Sandia assembly plant at Albuquerque, N. M., which may require assistance from the panel. Other negotiations are coming up this spring at Oak Ridge and elsewhere.

At the new Rocky Mountain Flats plant, operated by Dow Chemical Co., Denver, Col., the AFL Metal Trades Council beat the CIO in a representation election covering production workers. And the AFL has a petition pending asking for an election at the Savannah River H-bomb plant.

TVA wage agreement draws contractor fire

The recent abolition of the Wage Stabilization Board automatically put into effect, retroactive to Jan. 4, wage increases averaging 5.3% to some 12,000 operating maintenance and construction workers employed by the Tennessee Valley Authority.

A. E. Gaylon, business agent for the Knoxville Building Trades Council, promptly announced that "we feel that our people should have the same rate of increase as was given TVA workers."

The AFL is demanding that this increase be handed to some 25,000 construction workers in 18 area counties. Negotiations got under way between Associated General Contractors and the union but little progress was reported. The contract is slated to expire May 1.

When the increases were first proposed by the TVA local, AGC chapters protested that they did not reflect the prevailing wage scale. TVA maintained that its scales are based in the whole of the TVA area.

• **AGC protest**—C. P. Street, national president of AGC, said in Charlotte, N. C., that "the failure of TVA to operate properly under the law relating to payment of prevailing wage scales is contributing to inflation and is against the best interests of the country."

The AGC position is, he continued, that the TVA, as a government agency, is disobeying the law by paying wage rates higher than those prevailing in the area. Despite the protests four years ago, this practice has continued, he said.

• **TVA defended**—However, speaking at a TVA union-management cooperative conference, Douglas McGregor, college president and Standard Oil industrial relations consultant praised the TVA labor policies.

Supreme Court upholds Labor Department

Fair labor standards apply to "off-the-road" workers producing material for interstate roads

Employees engaged in "off-the-road" work, producing surfacing materials for an interstate highway, are protected by the Fair Labor Standards Act and must be paid time-and-a-half for overtime. Employers also must keep proper employment records for such employees.

That's the ruling announced by the Supreme Court last week upholding an interpretation of the law by Wage-Hour Administrator William R. McComb.

The Alstate Construction Co., a Pennsylvania road contractor, lost its argument that, because the road surfacing material it takes is produced in Pennsylvania for use on Pennsylvania roads, and is not shipped across state lines, these workers are not covered by the federal law. The federal Wage-Hour law covers only workers "engaged in interstate commerce or in the production of goods for interstate commerce."

The Labor Department started the court action to force Alstate to pay time-and-a-half to workers in three plants which were manufacturing a road surfacing mixture that was used by the company.

Most of Alstate's work was done on interstate roads or for companies producing goods for interstate commerce.

• **Amplification**—The court's ruling is an amplification of a prior ruling, that employees repairing interstate roads serve interstate commerce.

"By the same token," said the court, "he who produces goods for these indispensable and inseparable parts of commerce produces goods for interstate commerce."

From 1938 (when the law was passed) until 1945, the Labor Department took a position that such "off-the-road" employees were not protected by the Wage-Hour law. When the decision to switch that interpretation was announced publicly, it aroused a storm of protest from employers and their associations, like the National Sand & Gravel Association. Congress received many suggestions to water down the announced change; but none was adopted.

The court, taking note of this, said it would not "repudiate" an administrative interpretation which Congress refused to change.

A-plant strikes

Construction strikes on atomic energy projects last year caused a loss of 1.6% in potential working time among construction personnel, according to a survey of 1952 strikes by the Atomic Energy Commission.

Paducah, Ky. suffered most. Work stoppages there accounted for 70% or more than two-thirds, of the total construction time lost on all atomic projects. Next was Hanford, accounting for 13% of the loss, followed by Savannah River, 7%. The remaining 10% were scattered among construction operations at Fernald, Oak Ridge, Dana, the San Francisco Bay area, and various locations under the Santa Fe operations office.

The hottest strike spot in the industry—Joppa, Ill.—is not included because it is a private project to service Paducah with power.

Davis-Bacon wage law under new attack in Senate

Further criticism of the administration of the Davis-Bacon "prevailing wage" law covering federal construction came up on the floor of the U. S. Senate last week.

Target of the attack—by Sen. Dwight Griswold (R. Neb.)—was the establishment of wages by the Labor Department for construction of the Gavins Point Reservoir, which touches both Nebraska and South Dakota across the Missouri River.

Griswold charged that rates set by the Secretary of Labor for the $70-million project were 15 to 40 cents an hour higher than any wages paid for skilled and unskilled labor in northeastern Nebraska.

Just a short time before Griswold spoke, a "lame duck" report by the Senate Labor Committee—worked up during the Democratic controlled 82nd Congress—charged the Labor Department, the Corps of Engineers and other federal agencies with lax enforcement of the law. Some contractors, said the report, are still getting government contracts though they violate the wage and other labor standards required on federal construction projects. (ENR Feb. 26, p.28)

During hearings held by the department at Gavins Point, there was no other similar project in the area. So rates were set on the basis of wages then being paid at the Fort Randall Dam project, 50 mi away in South Dakota.

Injunction hits contractor in open-shop dispute

A Louisville, Ky., painting contractor who attempted to establish an open shop on an Oak Ridge, Tenn., house-painting project was ordered, in a temporary injunction, to rehire the 34 union employees who left his employment in the dispute and to discharge the 34 non-union painters he had hired since his open-shop decision.

The injunction against the contractor, Glenn H. Henson, was issued after the AFL Painters and Decorators local 437 had charged that Henson had violated his contract with the union and that his action violated provisions of both the National Labor Relations Act and the Tennessee "open-shop" law.

The union charged that 33 union painters and a foreman were fired because they were union members and said that state law prohibits the firing of anyone because of membership or non-membership in a union. The union also contended that the 34 non-union painters were apprentices and that the contract called for only three apprentices.

Secondary boycott?

More darkness than light is shed on the question of "when is a secondary boycott a secondary boycott under Taft-Hartley," by a federal court of appeals in Chicago. The court has upheld the National Labor Relations Board ruling in the Joliet, Ill., Contractors-AFL glaziers squabble that:

- **A union rule against working on jobs using preglazed sash is not by itself an unlawful boycott;**
- **Union refusal to refer glaziers to contractors using preglazed sash is not unlawful;**
- **But that where the union rule induces glaziers to stop work when they discover preglazed sash being used on the job, there is an illegal boycott.**

Court says all the union rules and actions against working on preglazed sash accomplish their intended object legally; yet it warns that continued use of the rules by the union "would seem to be a hazard" since they induce secondary boycotts.

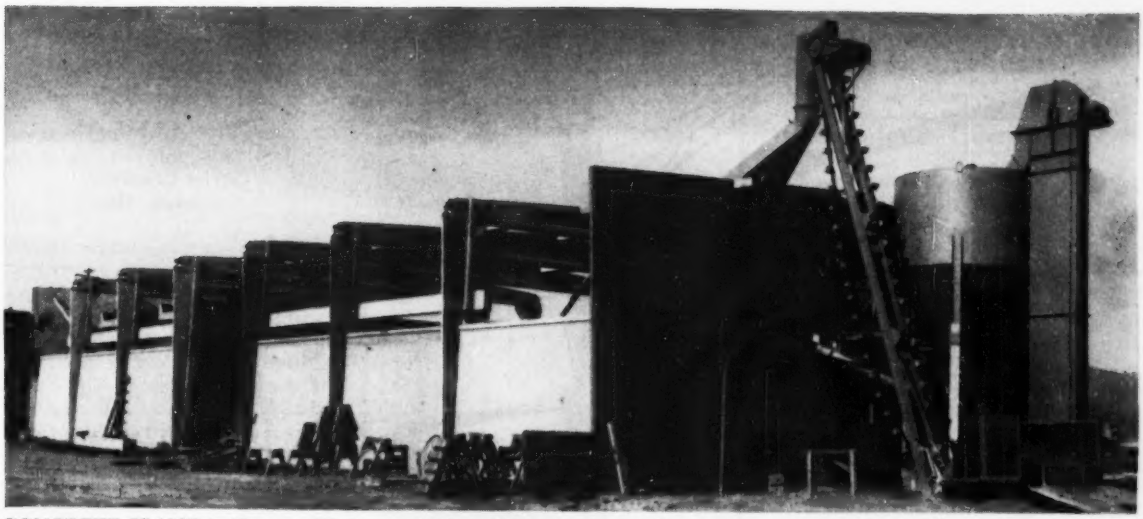

CONCRETE PLANT in Tacoma, Wash., was built to fabricate prestressed concrete components for building construction. Roof deck, purlins and girders of the building itself are prestressed.

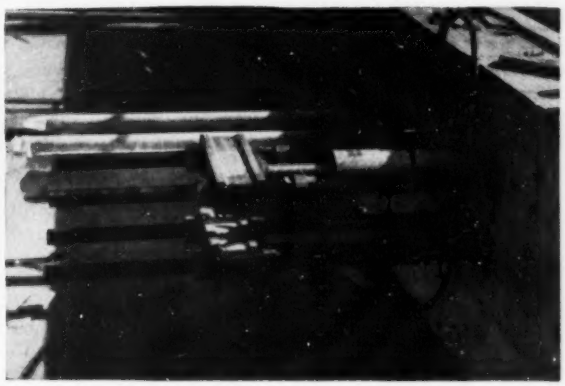

PRETENSIONING of several planks at one time (photo on left) is being observed by Art (left) and Tom Anderson, founders of the business. Jacks applying the prestress react against a thick concrete abutment (right).

Factory produces prestressed buildings

A PRESTRESSED CONCRETE BUILDING has been built recently in Tacoma, Wash., to produce prestressed concrete elements.

Part of the plant of the Concrete Engineering Co., the new unit was built to demonstrate to skeptical engineers and architects the feasibility of such work, and considerable professional interest is being shown in the project. Features of the structure are roofing planks, 2x20 in. by 25 ft long, and window sash made of prestressed concrete.

Owners of the new business, Tom and Art Anderson, are convinced that prestressed elements can be produced cheaper and better in a factory than on the job—the new building is meant to prove their point. In this regard, they think along the same lines as the owners of Pennsylvania's Concrete Products Company of America, who factory-produce bridge girders as described two months ago in (ENR Jan. 15, p. 5).

Floor slab of the 45x140-ft building is a heavily reinforced mat designed to serve as a casting bed. It has an accurately smoothed surface on which steel forms can be set up in several rows.

Columns are T-shaped, with the web 5-in. thick and the flange 12-in. wide. Precast reinforced concrete wall panels, 12x19½-ft by 4-in. thick, are anchored to the columns. These panels are topped by 10x19-ft window casings with 3x4-in. prestressed mullions giving an attractive appearance to the building.

• **Prestressed planks**—The roof deck is made of prestressed concrete planks. It is supported on prestressed roof purlins notched into the top flange of prestressed roof girders. The 2x20-in. planks are prestressed with 20 No. 8 high-tensile wires tensioned to 160,000 psi.

• **Factory product better**—According to the Andersons, the prefabricated, prestressed product delivers 50% greater performance than on-the-job prestressing.

This is the result of a closer control of mix and cure, improved forms, higher frequency vibration and greater knowledge of workmen specializing in that particular process.

It was logical, the brothers determined, to set up for factory-produced prestressing and develop an organization specializing in this product. The pattern is similar to that of the fabrication of steel structures, in that members will be cut to size, fitted and made up into units for as-

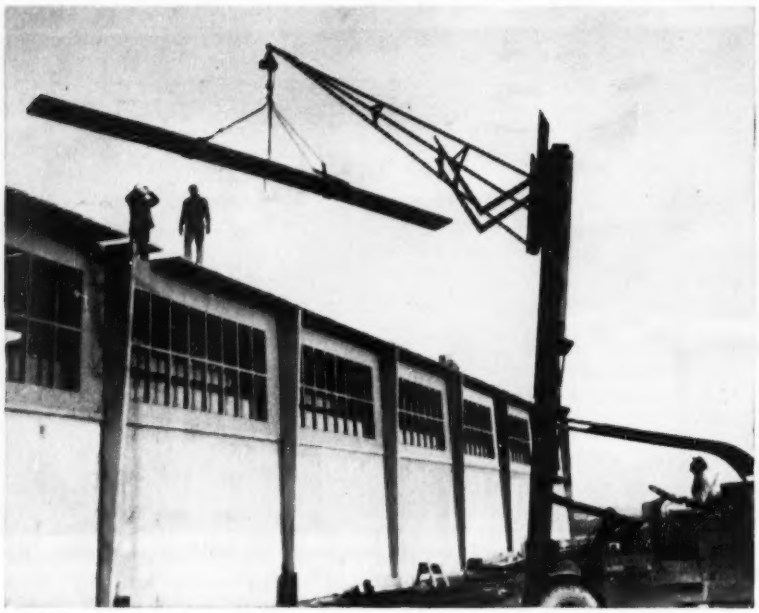

CONCRETE PLANK, 2 in. thick, but 25 ft long, goes into the roof deck.

sembly right on the building site.

• **Experience in Europe**—The Andersons, sons of a Tacoma contractor, entered the prestress field by devious routes. Both hold degrees from Massachusetts Institute of Technology and both spent periods in European engineering employment—Tom in Norway and Art in Germany—before World War II.

After the war, while Tom was back in the Pacific Northwest on contracting jobs, Art set up a consulting office in Stamford, Conn., and did research for the Austin Co., the city of Philadelphia, Preload Company, the Venezuelan government, and others.

Visualizing the possibilities of factory-produced prestressed concrete, they returned to Europe together in 1950 and made a thorough study of European methods. With refreshed knowledge, they went home to Tacoma and began construction of their plant.

• **Pretensioned products**—Along with factory-produced prestressing, the Andersons have adopted the pretensioning method. Tests prove, Art Anderson remarks, that pretensioning, providing a bond between wire and concrete, definitely assures a higher ultimate strength and greater safety factor. In addition, he explains, the necessity of fastening post-tensioned wires at the ends of members by mechanical means would pose difficult problems in thinner prestressed products, such as the 1-in. thick roof planks.

Concrete is allowed to develop a high compressive stress before the pretensioned wires are released. How much, depends on the member. In the case of the thin planks, it is 6,000 psi.

This stress is developed by use of an extremely dry mix with almost no slump. Specially designed external form vibrators are clamped to the steel forms to work the dry mix into place. The electrically driven units maintain a constant frequency of 7,000 rpm.

Anchorage for the wire is provided by rigid concrete abutments at each end of the prestressing line. Tension is applied by hydraulic jacks that react against the abutments.

To maintain accurate control of the concrete, the new firm uses modified beam specimens, 4x4x14-in., rather than standard cylinder specimens. Testing provides information on modulus of rupture and compressive values from each half of the specimens, which are first broken as beams. Experience indicates that more test information is gained by this procedure and the consistency of results is greater than that possible from cylinder specimens.

The Andersons also have been experimenting with different types of high carbon wire having ultimate strengths ranging between 220,000 and 280,000 psi. Prestressing is done with both smooth and stranded wires. Particular attention is directed to such properties as stress-strain relationship, creep of wire at high levels of pretensioning, creep losses of steel after prestressing, and bond between wire and concrete.

Peninsula, moat keep sewer dry

Omer A. Trippel
Asst. Engineer,
City of Cincinnati,
Cincinnati, Ohio

A coffer-dam was a simple approach to dry construction of a sewer syphon in Ohio.

Crossing the Little Miami River at Cincinnati, the sewer consists of two cast iron pipes encased in concrete. The encasement lies in clay, but immediately above was a five-foot bed of gravel, topped by two-feet of water.

Wet pipe-laying and concrete placement were prohibited by the specifications, so some sort of coffer-dam was necessary.

The contractor, Foley Construction Co., decided to build a broad peninsula two-thirds of the way across the river, on top of the pervious gravel bed, then flank the sewer location with intercepting ditches leading to a sump pump. Inside this moat he was free to dig his sewer dry.

Getting clay from the river bank, Foley built his peninsula 170 ft long, 100 ft wide and 2 ft above water level, with a 2-yd dragline and a bulldozer. Compacted by the rolling equipment, the earth made a stable working area. Next, he dug V-shaped intercepting ditches, through the gravel bed and a foot into clay. These ditches led to a sump at the point of the peninsula, where a 6-in. pump discharged drainage to the river. (There was talk of clay-lining the ditch's gravel faces, but it wasn't necessary; the pump easily kept ahead of the seepage.)

Main-ditch excavation, also with dragline, was a trapezoidal cut somewhat below clay level. Ten-foot wood sheets were driven until their tops were roughly at clay level, on lines 7 ft apart. (Longer sheets were used to hold the fill where intercepting ditches converged.) Then the rows of sheets were braced while excavation between them proceeded to a level 4.5 ft below their tops. A small open-joint tile drain, gravel-packed in a V-groove along the bottom centerline, carried riverbank seepage to the sump. The trench then was dry and ready for the siphon.

Cast iron pipes, 16 in. and 20 in., were laid and encased in concrete up to the tops of the sheets, which acted as side forms.

The job was completed by breaching the peninsula near its inshore end and repeating the operation from the other bank. Working time: 30 days.

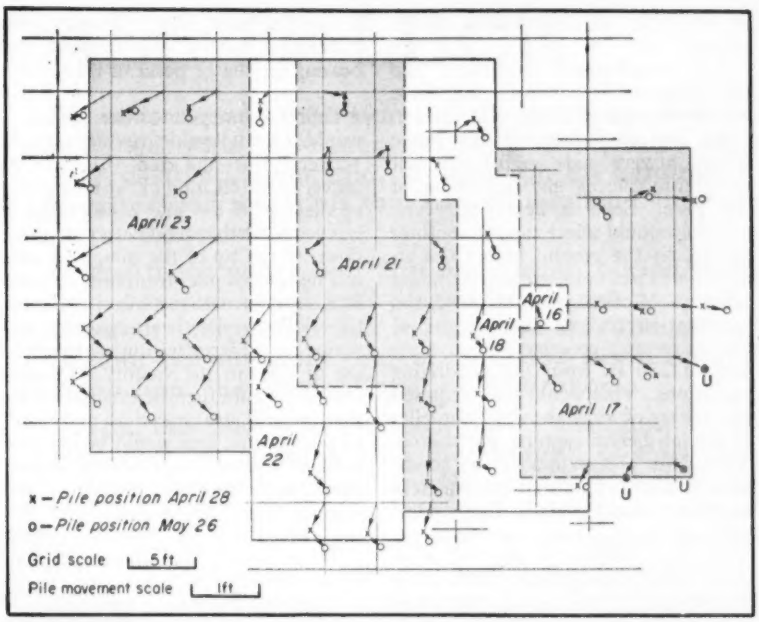

WANDERING PILES—Foundation plan, with lateral pile movements plotted to five times the plan scale, shows where piles went after they were driven. Origin of arrow indicates location of pile when driven.

The mystery of

The restless substratum

Piles that shifted and subsided, ground that heaved more than piles could have displaced it, core-holes that moved without distortion . . . These conditions were overcome with a "projectile" pile, but their causes remain partly unexplained.

J. H. Thornley
President
Western Foundation Corp.
New York, N. Y.

For unusual and even baffling pile-driving conditions it will be hard to beat a foundation job recently completed in Detroit. A tough upper earth stratum behaved like a blanket over a restless sleeper—the sleeper being a thick substratum of soft clay and boulders that was penetrated by almost 5,000 piles.

Pile lengths were 90 ft to 120 ft, making total footage 500,000. The piles will support a high-lift plant, switch house, weir chamber, filter building and wash water building for the Northeast Station of the Department of Water Supply of the City of Detroit.

The unusual soil conditions were mastered after some experimentation with composite pile types, but the theoretical explanations of various ground actions still are a matter for some conjecture.

• **Difficulties foreseen**—The designers anticipated the unusual ground behavior before bids were taken.

Pile layout and specifications were drawn up and the job supervised by engineers of the Department of Water Supply of Detroit under the close supervision of L. V. Garrity, assistant chief engineer.

The Bryant & Detwiler Co., of Detroit, was the general contractor and the Western Foundation Corp., installed the piling.

Before reciting data on which job specifications were based, and describing methods developed to meet the difficulties, it would seem well to start in the middle, by outlining four puzzling soil problems.

• **Shifting piles**—While not the first to be noted, possibly the most unusual of the four strange soil reactions was lateral movement of piles in amounts measured in inches, during a period of three weeks when no work was under way and no superstructure load had been applied either to the piles or to the soil in general. Observations were taken while the work was shut down by strike.

Such movements might have been explained partially had areas in the immediate vicinity of the piles in motion been excavated to greater depths than that of the area in which the piles were driven, and had the movements been toward the deeper areas. However, these lively piles were driven in the lowest part of the entire site and the movements did not take place in a single general direction.

• **Subsiding piles**—The second puzzle was the subsidence of piles. During the strike, many of the piles not only moved laterally but reversed their previous reaction—that of a slow but long-continued upward movement—and actually subsided. As will be explained later, the pile type and driving method permitted the top section of the pile to move up or down without necessarily affecting the lower-section's bearing in hardpan. A constant check proved that no movements did take place in the hardpan-bearing section.

• **Excess ground-heave**—The third freak reaction was noted when measurements indicated that a 1,000-sq ft area of the site showed a maximum surface heave of more than 4 ft, though the heave that would absorb the entire volume of soil displaced by the piles in the area should have caused only 2.7 ft of heave if it were uniformly distributed. A 100% heave due to the driving of displacement piles in non-compressible soil is of such rare occurrence that the writer has seen it not more than three times in an experience running to over a thousand piling jobs. But this time the heave did not stop at the 100%-mark—it was 50% better than complete.

• **Wandering core holes**—The fourth problem needing an answer was posed by the fact that cored holes through the upper tough stratum, when bored 40 ft or more ahead of the driving operations, moved as much as 13 in. without any distortion of the holes themselves.

Perhaps the most puzzling feature of this fourth problem is the fact that no pressure was created in the top stratum, which heaved and settled and moved laterally in many directions, apparently under the influence of movements in the lower soft clays, without itself showing any mud wave or distortion under pressure.

• **Three surveys**—The four mysterious conditions were not proved by casual observation, nor only by the usual instrument-checking done by the job layout crew. The job layout crew was but one of three agencies that made independent and complete surveys. The second survey, which checked with the first, was made by a field engineering crew of the Department of Water Supply. Even with the double evidence, there were some (including the writer) who remained skeptical. So it was arranged to have Warner & Warner—among the best-known and most dependable of the Detroit surveyors—make complete surveys, working around the clock over week-ends, when no construction operations would interfere. Their results agreed closely with findings of the other two parties.

Many attempts were made to work out a patterned relationship between the order of driving of the piles and the mass soil movements. Ultimately it did become possible to predict to some extent general "area movements" but solutions were strictly empirical and did not follow any known logical theory.

• Difficulties foreseen

The piling specifications had been carefully tailored to fit the difficult and unusual soil conditions, as job experience later proved. They were based primarily on the ability of the pile to take 200% of working load with a maximum gross settlement of ¾ in. —an unusually severe requirement. All test piles were well within allowed settlement, and met the usual requirements as to stresses in the materials forming the pile shaft. It was further required that the pile be "end-bearing."

However, in addition to these more or less standard requirements, the specifications set up plumb and sweep tolerances that were so severe that one of the bidders on the job stated in his proposal that the requirements were economically impossible of performance and that he would not agree to be bound by them. As events proved, he was right, as far as standard types and methods of piling go.

• **"Radius of heave" was key**—One other requirement of the specification proved to be a tough one to meet. This was a clause requiring that concrete could not be poured in any pile until it had been established that that pile was outside the "radius of heave."

This "radius of heave" proved to be far more extensive than probably had been anticipated by anyone, except perhaps the specification writer. The result was that as many as 2,000 piles at one time were open and unconcreted.

The specification recognized the fact, frequently overlooked, that there are THREE types of heave:

(a) The soil surface itself may heave within a very wide radius, without necessarily causing any movement of the piles. Such a heave, however, probably would affect caps or footings poured on the ground before the affected area had come to rest. Pending actual proof of this type of heave, the specification forbade the pouring of cap or footing concrete within a radius of 250 ft. from the piledriving operations. This would have required the driving of more than half the piles of the job before capping was started. After close observation of job conditions it was decided that cap concrete might be poured safely within not less than 100 ft. of driving operations.

(b) The heaving of the soil may, in the case of cast-in-place piles using a light steel shell as a form for all or part of the shaft of the pile, either cause a stretch in the shell or, in cases where a heavy-pipe lower section and a light-shelled upper section are used in forming the pile, may cause an upward movement of the upper section without causing any corresponding movement in the lower pipe section. It is obvious that if this type of movement took place after the concreting of the pile, the bearing value would be lost even though the point of the pile remained fixed in the bearing stratum.

Under the specifications no pile might be concreted within the maximum radius of heave of the tops of the piles. This radius was to be ascertained by a series of observations during the actual driving operations on the job. It was finally set at 50 ft to 60 ft, depending on local conditions.

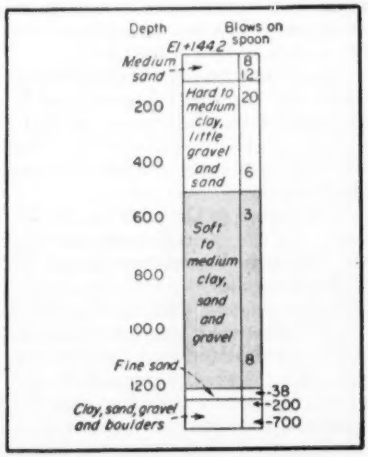

SAMPLE BORING RECORD shows the "restless sleeper"—the shaded zone. Hard clay above did not distort while moving.

(c) The third type of heave is one causing an upward movement of the bearing section or point of the pile.

• **Telltales for point heave**—Since it would be impossible to differentiate between this and the (b) type of heave, by observation of the movement of the top of the pile casing only, it was required that tell-tale pipes, going down to the tip of the pile, be placed in a number of piles from time to time. Readings were to be taken on these tell-tales immediately after driving, and periodically thereafter during the driving of piles in the vicinity. A radius of heave would then be established for that general area and if so indicated, all piles in that area would be redriven until they showed a resistance at least equal to the resistance shown on the original drive. The bid form for this job considered the possibility that 3,500 or more of the piles might have to be redriven. An allowance was to be made to the owner for any lesser number of redrives than the 3,500 included in the lump sum of the bid. The tell-tales showed entirely satisfactory results so no areas of redriving had to be established.

However, about 200 piles were retapped to make sure that the soil below the points had not by any chance been loosened by the driving of adjacent piles. All piles were found to be firmly seated. A load test was made on a pile showing the maximum movement. This test showed a net settlement of ⅛ in. under 100% overload to 100 tons.

• Tough stratum on clay

The sub-surface soil conditions were as follows:

From the cut-off of the piles (El. +118 to El. +126) to an elevation of +100 there was found a stratum of tough, moist clay with occasional sandy pockets and boulders. The degree of "toughness" varied with the moisture content, though there seemed also to be a variation of "density" unrelated to the moisture content. This was indicated by the comparative ease with which the piles could, at some locations, be driven through the tough clay crust, without coring, while at other points driving through the crust, without coring, even with a 24,000-ft lb single-acting steam hammer, required 20 minutes or more of continuous pounding.

• **Soft clay**—Below this upper tough clay stratum the soil encountered was also a clay, but much moister than that of the top crust. This soft to medium soft clay extended to about elevation +10 where the hardpan was encountered. This clay varied from

CALL IT LUCK

But once in a while a man has the privilege of being present when the curtain is pulled aside for a moment. He is granted the opportunity of visioning a better way of doing something. If—through his ingenuity—he can translate this vision in terms and materials that benefit mankind, they call him a genius an inventor or an industrialist.

It was thirty years ago that the curtain parted and the original open web bar joist was conceived and placed in volume production by Stanley Macomber. It is rather unique that the founding of this industry—the inception of every stabilizing development and each of the basic improvements through the years came from the original well of inspiration.

Today, this floor joist and roof purlin designed to replace wood as a secondary load bearing member with the strength of steel has a nail gripping power 2½ times that of good construction lumber. A gripping power that cannot dry out and lose its grip on nails. A barrier against fire wherever humans occupy the floors above. A structural member—ready to erect—easy to pass service lines through, saving dollars of time, labor and concrete on every job. This catalog takes it from there.

WRITE FOR

YOUR COPY

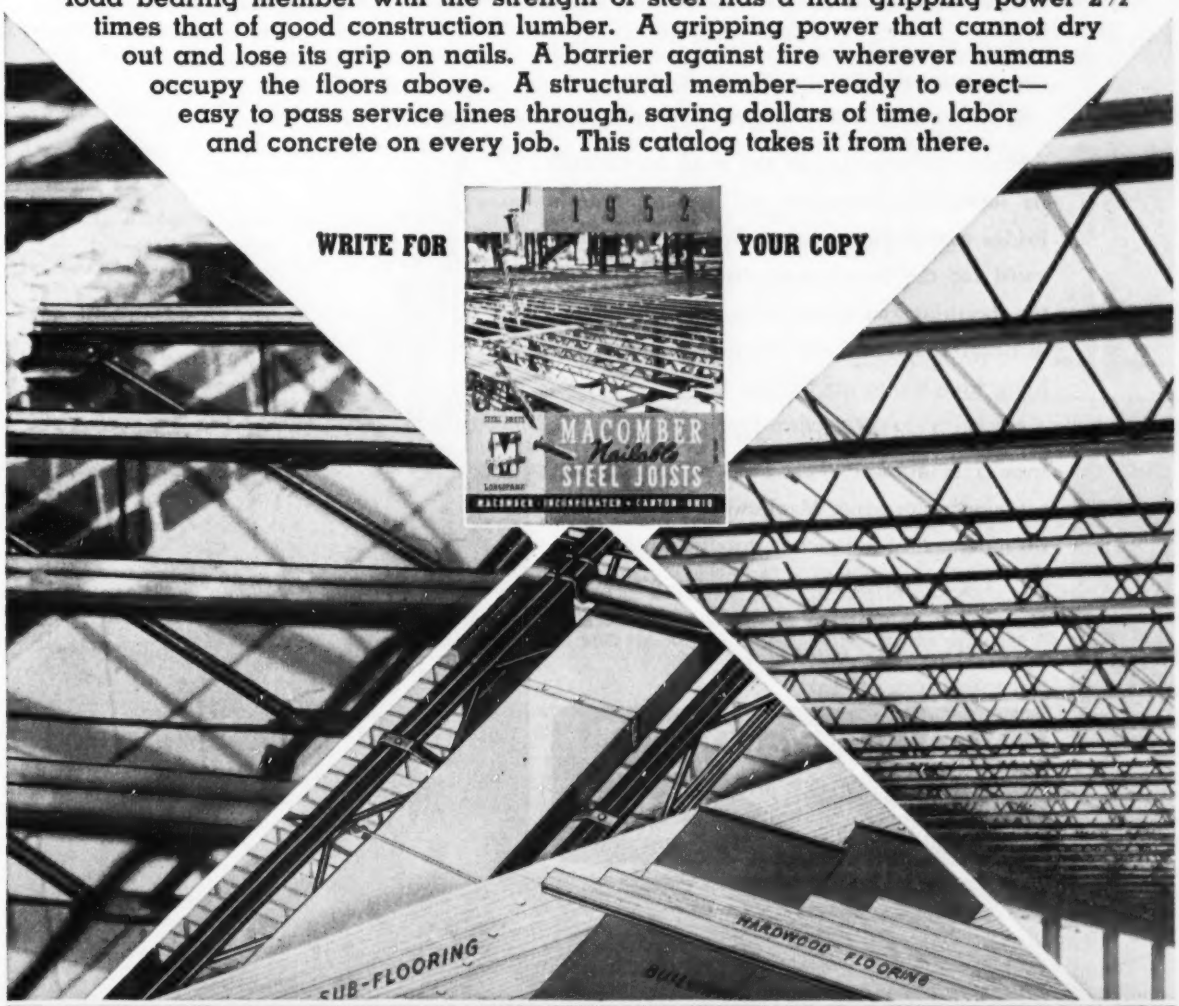

SERVICE IN STEEL · MACOMBER · CANTON, OHIO · STANDARDIZED · ERECTION

STANDARDIZED STEEL BUILDING PRODUCTS

MACOMBER • INCORPORATED

CANTON, OHIO

V BAR JOISTS • LONGSPANS • BOWSTRING TRUSSES • STEEL DECK

MANITOWOC

MODEL 2000—1¼ YD.

Big Machine Performance

plus small machine versatility

Here's a husky little 1¼ yd. machine with actual capacity of a larger size unit—plus the versatility and maneuverability of a smaller machine.

Working for R. L. Schutt & Co. of Indianapolis, a Model 2000 is paying its way every day through its superior performance and versatility on a bridge construction job near Winamac. It excavated for the foundations, drove the piles, set the sheathing and set the steel, including 19 ton sections. It handled the entire operation scrambling from site to site and job to job.

It's the kind of performance you can expect from a Manitowoc — the kind of cost cutting, superior performance Manitowocs are delivering for thousands of contractors throughout the country. For complete details see your Manitowoc Distributor or write to Manitowoc Engineering Corp., Manitowoc, Wisconsin.

MANITOWOC

SHOVELS 1-5 YD. Speedcrane CRANES 18-100 TON

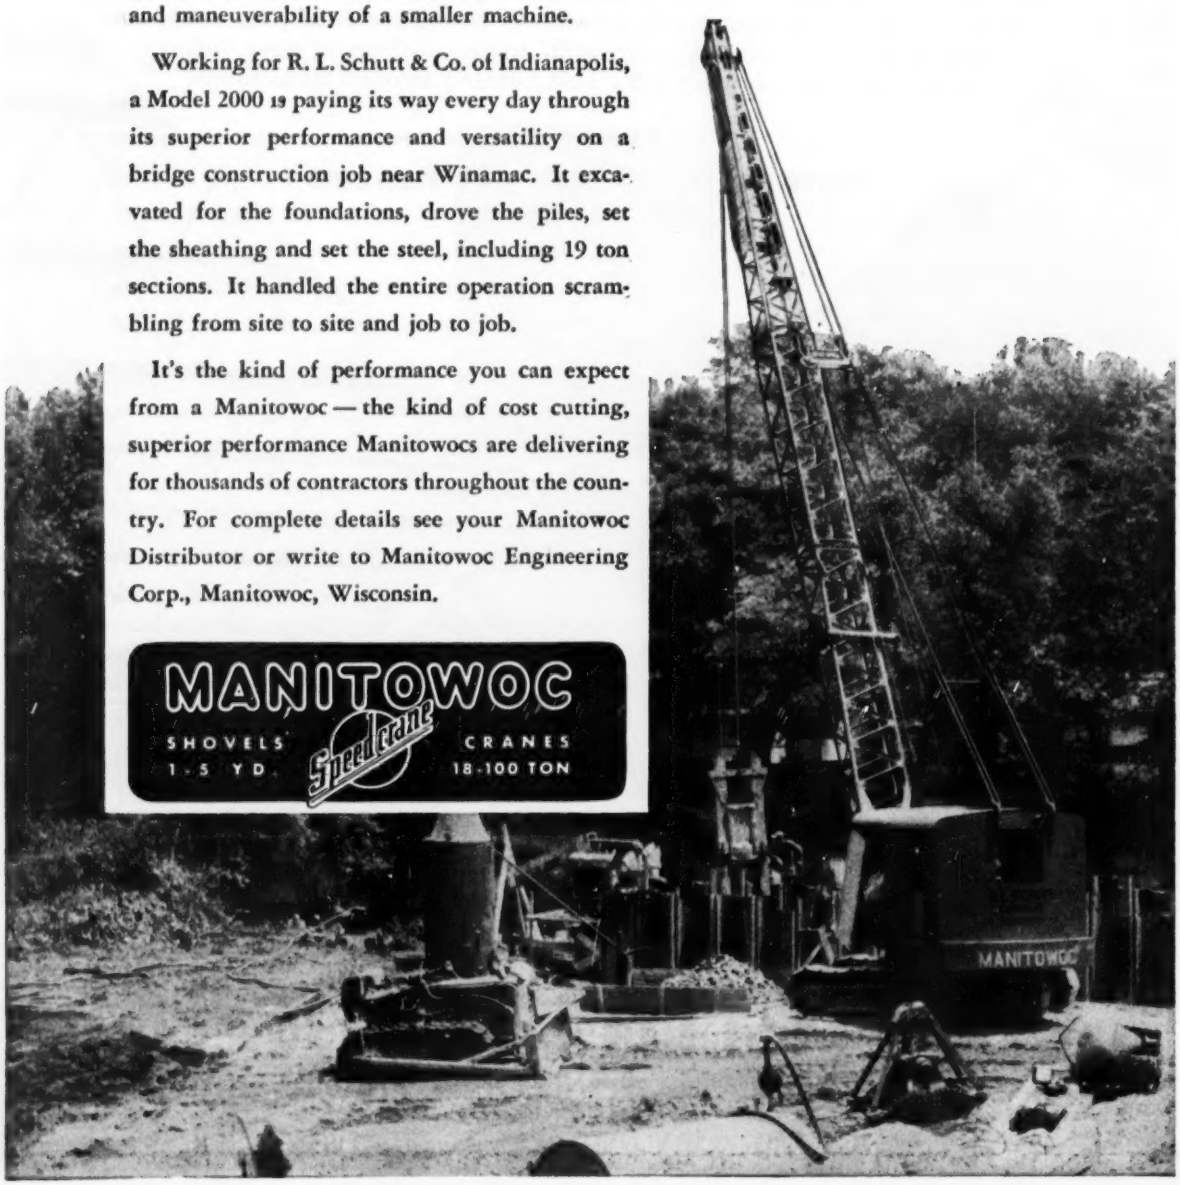

"very soft," as indicated by a free run of the 14-in. driving apparatus under the hammer, to "medium firm" requiring 1 to 3 blows to the inch of penetration when using the heavy hammer. In this soft to medium clay stratum there were numerous boulders and also pockets of sand and gravel.

• **Hardpan**—Below this medium-stiff, pocketed clay, there was a deep layer of hardpan through which piles could not be driven. It was in this hardpan layer that the piles, which under the specifications were to be "end-bearing," developed most of their bearing capacity.

The accompanying boring diagram might be considered "typical," if indeed any one soil boring on a site where variable soil is to be encountered could ever be called "typical."

• "Projectile" pile chosen

For reasons of economy, and in order to meet the then grave shortage of steel in any form, the contractor offered a steel-pipe composite type of pile. This type was approved subject to meeting the various requirements of the specifications.

With the general type of the pile selected, there were still two important decisions to be made: (a) a choice between two general methods of forming composite piles—the "follow down" and the "driven through" or "projectile" method; (b) a choice of the splice between the two elements of the composite pile.

• **Follow-down method**—In the follow-down method—the more widely used of the two—the pipes, wood piles or precast piles forming the lower section of the finished composite piles are driven to ground level first.

After a sufficient number of the bottom sections has been installed, either the same, or a second, driver is equipped with a follower which fits the head of the first driven section. The driving is started and the lower section is forced down to its final bearing position. This follower may carry a shell mounted on the outside or it may be made hollow so that a shell can later be placed through it.

• **Projectile method**—The second method of forming a composite pile—the "driven-through" or "projectile" method—is shown in an accompanying sketch. In this method, a forming apparatus is driven into the ground to some predetermined depth. This apparatus consists of a heavy-walled steel casing pipe carrying within it a core or mandrel having a solid base of such size as to closely fit the inside dimensions of the casing. After the first driving the core is removed and the closed-end steel pipe section (lower portion of finished pile) is placed in the casing. Using the core as a follower, the pipe is then driven to the predetermined resistance in the bearing stratum.

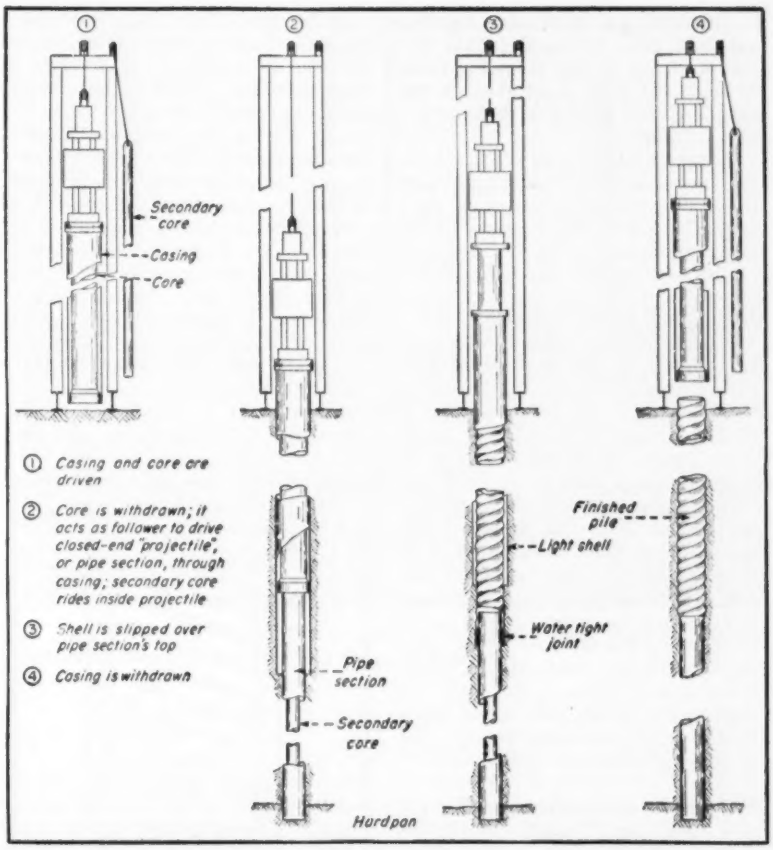

PROJECTILE PILEDRIVING procedure shows steps of method adopted to keep piles straight and watertight in difficult substratum. Secondary core keeps pipe section from getting off line when it hits "floating" boulders.

• **Projectile controls sweep**—The follow-down method has the advantage of simplicity in the making the splice between the two sections of the pile, but the projectile method offers far greater control against the tendency of the lower section to run out of plumb or develop sweep, due to encountering boulders or other obstructions. When firmly controlled by rigid pile-driver leads the pipe section has a fair amount of resistance to bending strain set up by boulders or other obstructions encountered by the pile point. But in the follow-down method such control can be exercised only until the top of the pipe reaches ground level. From that point down, control takes place through a splice, which may extend 3 ft, or in some types as little as 18 in. below the top of the pipe section. Try to hold a lead pencil by the eraser only, while someone shoves against the point and you get the general idea.

The average length of steel pipe section of a composite pile on this particular job proved to be around 45 ft. To make the average overall length of 107 ft. the pipe section would have to be followed down 62 ft. after reaching the ground surface. This might be unimportant in a clean soil but in soil where obstructions would certainly be encountered on many pile locations, it would prove well nigh impossible to keep the pile within the rigid tolerance of the specifications.

On the other hand, in the projectile method, the pipe section would be guided by the predriven guide casing throughout nearly its entire drive. As will be shown later, added precautions had to be devised to prevent sweep even with the projectile method.

• **Slip-splice chosen**—There was also a choice to be made in the type of splice between the two sections of the composite pile.

In one method, the light shelled section overlaps the steel pipe section and is firmly attached to it by means of "dogs," a "screw joint" or a "peening action."

This locking of the sections together may take place before the lower section is driven below ground surface; or when the shell is set through the apparatus after driving of the pipe section is complete.

In the second type of splice, which has also been widely used by at least three piling contractors, the light shell section is not rigidly attached to the pipe section but joins it by some form of slip-joint so that the light shelled section may move upward independently of the lower pipe section.

For the job in question, there was an outstanding objection to each of the splice types.

• **Locked-joint drawbacks**—If soil-heave should prove to be severe, as it did here the top section probably would raise the pipe section with it, destroying contact with the hardpan. The seating of the pipe probably could be re-established by redriving but if the initial upward movement permitted soft clay to get into the hardpan socket the holding-down action of the pipe section probably could not be re-established and vibration or any slight upward strain on the pile might again lift the entire pile, seriously impairing its bearing value.

• **Slip-splice pros and cons**—The use of a "slip splice" would obviate this danger of raising the pipe section and would result in the elimination of the redriving.

However, previous experience and observation had shown that the slip-joint had its own weakness. Where the splice would occur, as in this job, at a point in the soft clay stratum where natural soil pressures would be high and where the great volume of piling introduced would add artificial pressures to the natural ones, it would prove extremely difficult to form a slip joint that could be depended upon to seal out the clay.

The piling contractor came equipped to use either the follow-down or the projectile method and to form either the locked-on or slip-joint type of splice.

The final decision was to adopt the projectile method in combination with the slip-splice.

• **Not enough leeway**—One major splice trouble developed on the job, but gave way to an obvious, though expensive, cure. The original design of the slip-splice (which incidentally proved to be 100% perfect in the matter of sealing off the soft high pressure clay, and under test above ground held out soupy clay under 113 psi pressure) was wrong at one point. It was made to allow for only 18 in. maximum slip.

In the area of the closest pile spacing the soil surface might theoretically be raised 2.7 ft if the assumption were made that the soil from the ground surface to the bottom of the pile would react as an absolutely incompressible material. Since the soil movement is cumulative from the pile point to the ground surface, and since that movement can raise a pile only if it develops a bond with the pile, it would seem that the movement of the shelled section of the pile should be only about that of the soil at the mid-point of the pile. In other words, from the mid-point DOWN the slower moving soil would act as an anchor to restrain the movement of the top half of the pile. This is, of course, an over-simplification but long experience has shown that pile heave is, under practically all conditions, substantially less than ground heave. The 18-in. slip limit looked safe enough. Unfortunately, as previously noted, the heave in the deepest section exceeded the theoretical 100%, and in addition did not occur uniformly with the number of piles driven, as it would seem that it should do in an incompressible soil.

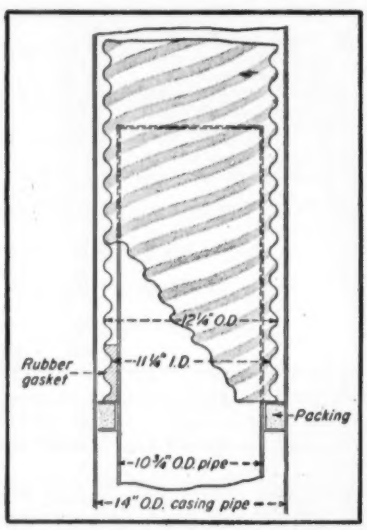

JOINT DETAIL where shell slips over pipe section. Packing in channel around pipe section keeps pipe dry until shell and gasket are in place.

RUBBER GASKETS have been glued inside these shell ends; another lies on top. They make a sliding seal at joint with pipe section. (Armco photo.)

By the time the heave had gotten well under way, the danger of excessive splice movement was realized. The limit of splice slip was increased to 2.6 ft and shortly thereafter to 3.0 ft, but of the first driven piles some 60 opened up at the splice and had to be replaced. After the longer lap had been adopted no further splice trouble was encountered.

• Secondary core needed

Three weeks of experimental and test driving and load testing left little question as to the correctness of the choice of method. The first half-dozen drive-down tests seemed to indicate that there should be little difficulty in installing piles by either method. The driver then was moved 50 ft and pile driving for load tests was started. It did not get far. Drive-down after drive-down was made but the piles led off so sharply that it was impossible to get within the rigid requirements for plumb and sweep. Five of the first six piles driven were completely outside the tolerances.

It was evident that boulders and gravel pockets were being encountered. An indication of these conditions had been given by the borings, but well-known facts had been overlooked by the contractor. One: 2½ in. borings will touch only a fraction as many boulders as will be encountered at the same location by a 14 in. pipe. Also a 2½ in. boring may wind its way among large boulders without giving any indication of their presence. The boulder situation was far worse than had been anticipated.

A further complication was introduced by the fact that many of the boulders were "floating" in a soft clay. Had the matrix been firm, as it generally is where boulders are encountered, the action of a boulder, hit by a heavy-walled steel pipe, would be either to break under the impact of the transmitted hammer blows, or to stop further penetration of the pipe.

With pipe and boulder both loosely held the tendency would be to force both the pipe and the boulder out of position, and that is what happened.

• **Original driving apparatus**—The casing through which the pipe section was to be placed consisted of a Grade

B 14 in. x ½ in. wall pipe 74 ft. in length, with a 10¾ in. x ½ in. wall core fitted inside it. The obstructions encountered were so bad that this apparatus itself in some cases showed a sweep approximating the maximum tolerance allowed for the finished pile. A pipe driven through such a guide would be certain to go far outside the permitted tolerances. Obviously, it was necessary to develop a stiffer apparatus. As originally used, the core, except for the steel core-point, fitted loosely inside the casing. It could give the casing little support against bending.

The core-point was built up to give a snug fit in the casing, and frequent spacers were welded to the core to get bearing between core and casing. So arranged, the bending strength of the core was added to that of the casing. Test drives were again made. The stiffened apparatus drove plumb and without sweep—and continued to do so throughout the life of the job—but that did not finish the troubles.

• **Projectile sweep trouble**—The projectile section, even when driven through the plumb, straight apparatus, could not be kept true. The control of the casing was complete but the 10¾ in. x ½ in. wall pipe itself was not sufficiently rigid. When obstructions were encountered, the pipe developed fairly sharp bends so that the piles would not meet the sweep specification. (The sweep specification required that some part of the bottom of the pile could be seen from the top when a light was lowered into the pile.)

• **Secondary core stiffens projectile**—It was evident that additional pipe rigidity must be obtained. This was accomplished by an adaptation of the same means used to stiffen the casing. A secondary core, made of heavy-wall pipe of a diameter to closely fit inside the 10¾ in. pipe, was used. After the 10¾ in. projectile section had been placed in the drive-casing this secondary core was placed inside of it. The main driving core was then inserted in the drive-casing and used as a follower to drive the 10¾ in. pipe with its secondary core downward beyond the bottom of the casing. At last the piles were fully within specification requirements. No further piles were condemned for sweep or plumb when driven.

• Piledriving procedure

The following is a step by step account of the piledriving method used:

1. Using a power-driven earth auger, a 13-in. hole was bored through the tough top stratum.

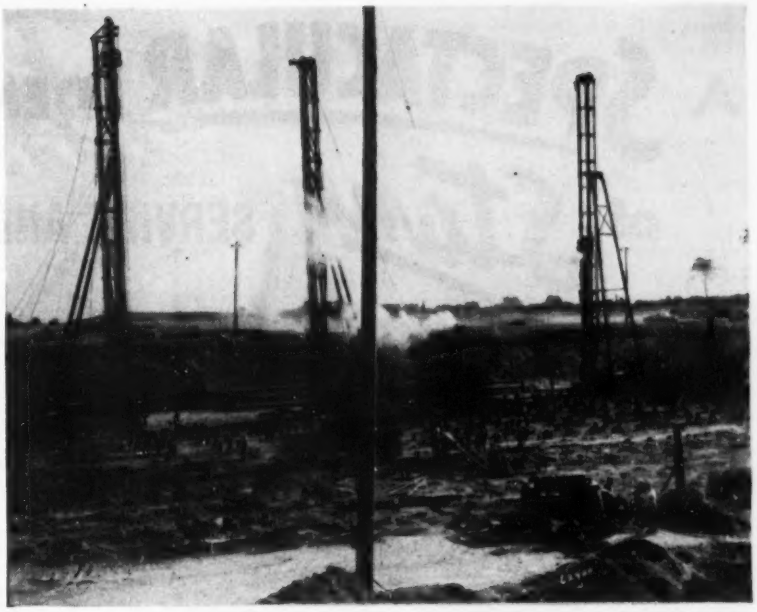

WHERE THE PILES MOVED—A portion of the Detroit water plant site, showing three of the four piledriving rigs that drove projectile piles.

2. The casing and core were driven 72 ft below grade.

3. The driving core was removed from the casing and a 10¾ in. O.D. closed-end steel pipe (the projectile) was inserted in the casing. This pipe was of a length to reach full bearing in hardpan while 5 feet remained in the drive-casing.

4. The secondary core was inserted in the 10¾-in. pipe. The driving-core was replaced in contact with the 10¾-in. pipe. The hammer, riding the driving core, was put in operation and the pipe section driven until it showed the required depth and resistance.

5. The driving core was removed and a 12 in. corrugated shell carrying a rubber gasket was inserted through the drive-casing and forced over the head of the pipe section.

6. The secondary core was removed from the pipe section and the drive-casing withdrawn from the ground.

7. The shell and pipe were filled with concrete after all driving operations had passed beyond the previously ascertained radii of heave. Each pile on the site was examined immediately after driving, by means of an electric light lowered to the bottom of the pile or by using mirror reflectors. Out of 4,824 piles constituting the finished job, none was condemned for exceeding the tolerances.

• **No pile distortion**—An additional test made on every pile consisted of lowering a metal cone gage ¼ in. less diameter than the inside diameter of the light shell, to the bottom of the shelled section to determine whether crushing of the shell had occurred during the period when the shells remained open after driving and before concreting. As stated, over 2,000 piles were open and unconcreted at one time, but none was reported distorted even within the close tolerance allowed. Though all shells and pipes were perfect immediately after the time of driving, a few were carried beyond tolerance by the movements of the soil previously described, and had to be replaced. Considering that many of the piles in the high lift section of the work, where pile centers were closest, had moved from their originally driven positions, in amounts of 6 in. to 12 in. (which was compensated where necessary by the driving of extra piles) this resistance to distortion seems remarkable. The shells were all of spirally corrugated type, part being 16-gage with fully welded seams and the remainder 18-gage unwelded.

The pile load capacity was checked by seven 100-ton load tests. Maximum net settlement in any test was ½ in. The 4,824 piles had a total length of 516,015 ft.

Four heavy-duty steel pile-drivers carrying 30,000 ft-lb hammers installed the piles. They worked two shifts per day whenever enough pipe was on hand to keep them going. Two 50-hp earth-auger boring plants, a service crane, a crawler tractor, welding machines, pumps, trucks and small tools, constituted the balance of the equipment that made possible the completion of the job in a period of 24 weeks driving time.

A SPECTACULAR DEMONSTRATION of Stang SERVICE AND STANG KNOW-HOW

This is the initial stage of the core-trench of the Earth Fill-Impervious Cutoff Dam now under construction at Kirwin, Kansas by the U. S. Bureau of Reclamation. Cook Construction Co. of Jackson, Miss. has the contract for this stage, which is 5000 ft. long, with a maximum depth of 90 ft. of which 60 ft. was below ground water table. Predominant soil characteristic—fine silt, quick when saturated.

By dewatering the excavation and stabilizing the side slopes with STANG WELLPOINT SYSTEMS, the contractor was enabled to

- Excavate to payline with over-excavation at a minimum.
- Use high speed money making equipment for minimum excavation cost.
- Place backfill conforming strictly to specified moisture content and compaction requirements.

JOHN W. STANG CORPORATION

Engineers and Manufacturers of Dewatering Equipment

BELL, LOS ANGELES CTY., CALIF.
8221 Atlantic Avenue
P. O. Box 631 Telephone: Logan 5-7421

NEW YORK CITY, NEW YORK
Number Two Broadway
Telephone: Whitehall 3-0565

TACOMA, WASHINGTON
2339 Lincoln Avenue
Telephone: Broadway 4362

OMAHA, NEBRASKA
2123 South 56th Street
Telephone: Walnut 7796

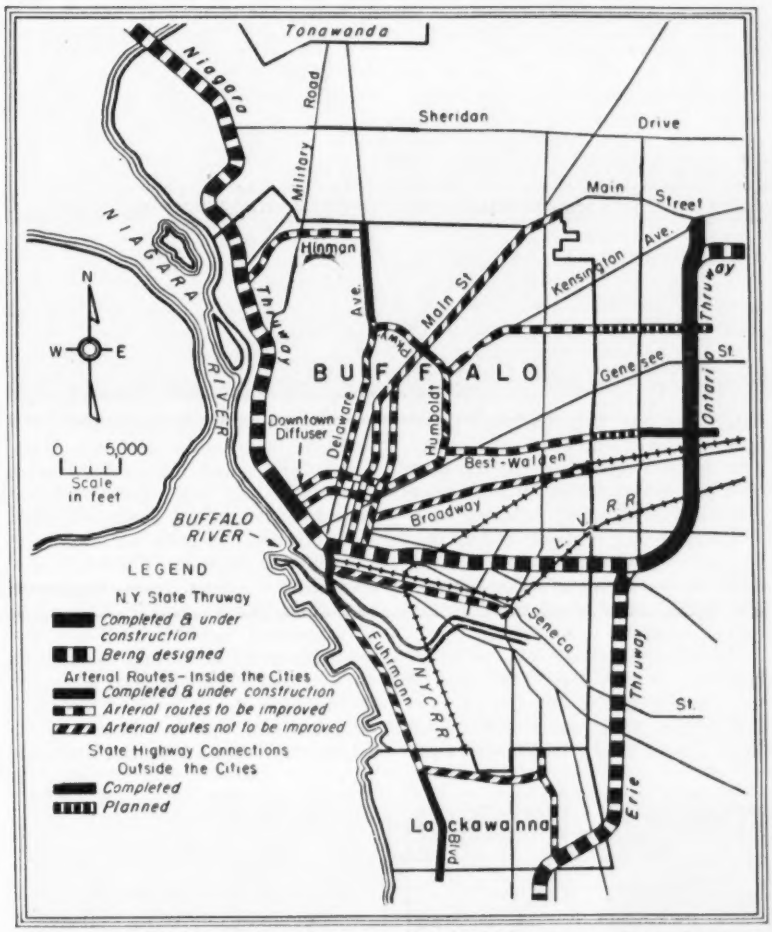

ARTERIAL ROUTES OF BUFFALO'S MASTER PLAN. They are designed to facilitate the movement of traffic into the center of Buffalo as well as to speed the travel of traffic through the metropolitan area destined either for the Niagara region or going west toward, Erie, Pa.

Thruway branch will ease Buffalo traffic flow problems

Charles R. Waters
District Engineer
New York State Department of Public Works, Buffalo, N. Y.

THE NIAGARA THRUWAY, a branch of New York State's new thruway system, is being built right across the central business district of the city of Buffalo, rather than through the suburbs, in an unusual plan to use the superhighway as an arterial route in the city's traffic pattern. The fact that the Thruway forks at Buffalo, with one branch going north to Niagara Falls and one going west toward Erie, Pa., helps to make this plan effective.

Use of state funds to help cities solve their traffic problems was made possible by an act of the state legislature passed in 1944 to implement the urban-aid provision of the federal-aid highway act of the same year. Buffalo was picked as the first city in which to try out the plan. Under it, construction costs are borne equally by the state and federal governments, with the city participating to an extent of half the cost of land needed for the projects.

• **An expanding area**—Buffalo, with a population of 600,000, is New York's largest up-state city. It lies on the waterfront at the eastern end of Lake Erie with a central business district close to the lake and surrounded elsewhere by a residential and industrial area four to six miles deep. The population of the city proper is fairly static but the surrounding suburban areas are growing rapidly in all directions.

Buffalo is a community of heavy and diverse industries, the focal point in the development of the Niagara Frontier metropolitan area. Future growth of this area is dependent on a good highway and street network.

The original street layout pattern of the city was definitely of a wide-street radial pattern, somewhat like that of the city of Washington, D. C. Nevertheless, a great increase in auto and truck traffic into the central hub of the city caused congestion that only the construction of new arteries could relieve. Minor improvements made by the city over the years did little to ease the growing traffic congestion.

• **Through traffic study made**—When the New York State Department of Public Works entered the picture in 1946, an origin and destination survey was made, population and automobile registration trends were analyzed, also industrial location and growth potential and land use.

The time required to reach the city limits traveling at rush and normal hours was obtained by timing actual trips. Results of this study, projected to 1960, are shown in the accompanying diagram.

The combination of information thus obtained showed that with a few exceptions, the principal bottlenecks and congested areas were on the radial streets. Peripheral bypass routes constructed prior to 1930, with a few exceptions, are generally adequate.

• **New York State Thruway**—A decision to proceed with the construction of the New York State Thruway across the state occurred at about the same time that Buffalo's Urban Arterial Program was starting. This made it possible to tie the anticipated benefits together and adopt a coordinated scheme.

Those studies showed that the greatest amount of benefit could be obtained by running the Niagara branch of the thruway from a junction with the main line of that highway east of the city in an east-west direction directly into the business area. This would permit the people living in the eastern and northeastern suburbs to reach the business center in less than half the time required over customary routes.

Worthy of special note is the effect of the thruway on the time-flow zones, as shown in the time-flow map on page 42.

• **City street relief**—Main St. will be relieved by the thruway and also by the relocation of Kensington Ave., the widening of Walden Ave. and the opening of a street in the downtown area parallel to and just north of

Genesee St. Further relief will be provided for Main St. by a circumferential traffic diffuser surrounding the business district.

Delaware Ave., a major north-south radial street, has been widened to arterial standards in the northerly portion and it is planned to improve the remainder of this main artery. Also proposed is an expressway, known as the Hinman Ave. extension, to divert suburban traffic from Delaware Ave. at the northerly city line to the Niagara Thruway along the waterfront and thence to its destination downtown.

Delays now encountered at lift bridges across the Buffalo River are to be eliminated by building a $10-million high level bridge to carry Fuhrmann Boulevard.

• **Niagara Thruway**—The north-south section of the Niagara Thruway running from the downtown interchanges to the South Grand Island Bridge, in conjunction with the Hinman Ave. expressway, will serve as an interceptor of traffic generated in the northern surburbs.

The east-west portion of the Niagara thruway as planned at present traverses a closely built-up section of the city and would be costly both for construction and right-of-way. Some sections would cost more than $7-million per mile. Consequently, studies now are being made of the possibility of using the right-of-way of the Lehigh Valley R.R. spur to the waterfront, should the railroad be willing to sell that line, as has been reported. Traffic needs would be served about equally well by either location.

• **Progress on the master plan**—The master plan for this traffic relief program set up the work in separate projects with the understood policy that the detail plans for each one would be presented to the city for approval before advertisement for bids. The city thus has veto power over the advancement of any project. The city also can stop the initiation of a project by failure to provide its share of funds for right-of-way.

Several major portions of the master plan already have been completed, while others are now under contract. The details of some of the construction projects are as follows:

Before any major work could be initiated in the downtown area, it was necessary to remove the tracks of the Niagara Falls branch of the New York Central R.R., which now operates on some of the streets in this area, and to relocate them in subways or open cuts. This particular undertaking, known locally as the Terrace project, has been advocated for 70 years. The first work on it was put under contract in 1949 and the project was placed in service in August of 1952. Its cost was about $7 million.

The widening and reconstruction of Delaware Ave. in the northerly part of the city for a distance of nearly two miles, together with the widening and rebuilding of three separate overhead railroad bridges, has been completed at a cost of $2 million.

The Main-Humboldt underpass, a $2-million contract, was completed recently and opened to traffic.

Twenty-four piers for the High Level Bridge to carry Fuhrmann Boulevard over the Buffalo River have been completed under a $2-million contract. Recently an additional $321,000-contract for the south approach was awarded to H. F. Stimm of Buffalo. Work is now under way.

A contract for the piers and approaches at the north end, which will amount to $750,000, has been approved by the city council and will be advertised shortly. The total of all construction costs for this improve-

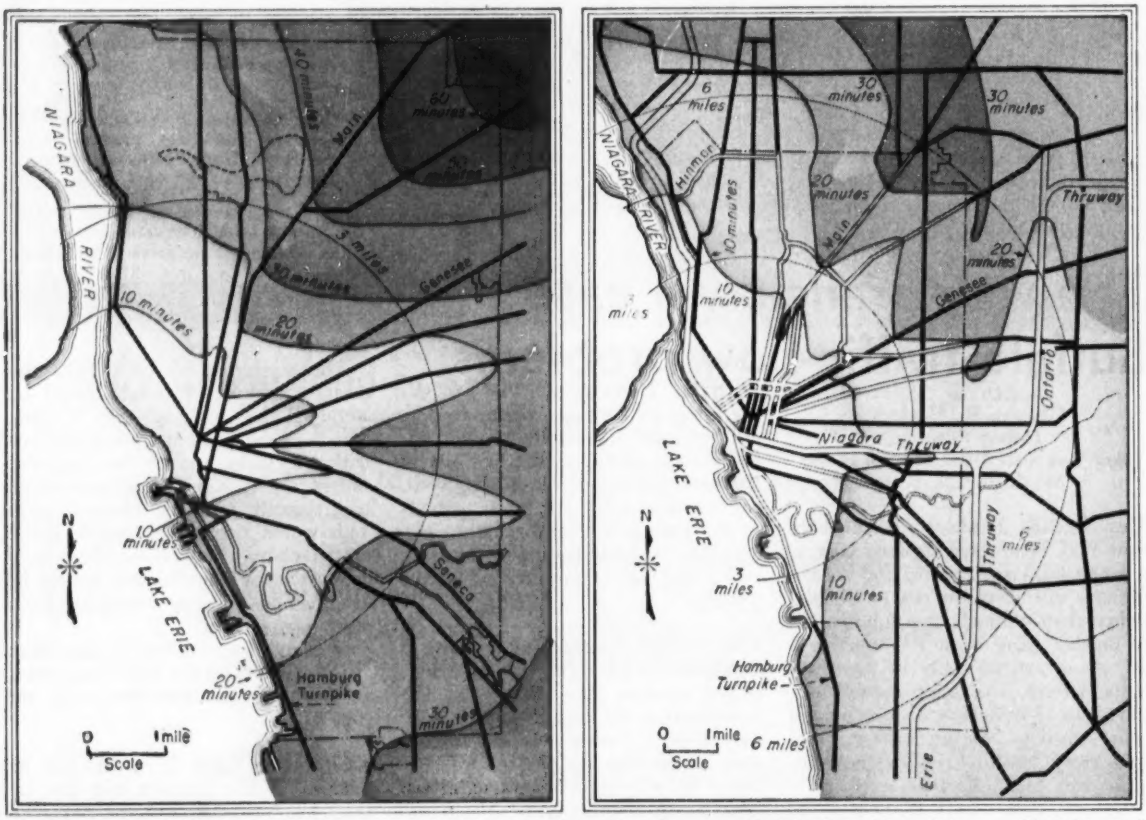

TIME-FLOW MAPS demonstrate the large savings in time of travel to downtown Buffalo that will result from making the state's thruway an integral part of the arterial-route development plan. At the left is the traffic-flow situation as it would exist in 1960 with no street improvements other than removal of surface cars.

AN UNDERPASS has been built to carry Humboldt Parkway below Main Street to end congestion at that major intersection.

ment will be more than $10 million.

• **Construction progress**—A one-mile section of the Niagara Thruway along the waterfront, costing $500,000, was completed and opened to traffic in 1951. A section of the Ontario Thruway, east of Buffalo, 4.5 miles in length and costing $5 million, also has been opened to traffic.

Construction work having a value of $3.5 million is now well advanced on two further contracts just east of the city, and work on four additional projects, which will carry the thruway to the easterly line of Erie County, also is under way.

Several firms of consulting engineers working under the immediate direction of the district engineering organization of the New York State Department of Public Works, are engaged on designs for various sections of the thruway running southwesterly to the Pennsylvania state line, as well as on the Niagara section along the waterfront and across Grand Island to Niagara Falls.

• **Benefits of the plan**—The benefits of the entire plan when completed, may be summarized as follows:

It will: (1) Diffuse traffic from and provide easy access to the thruway; (2) Relieve the overloaded radial street system; (3) Furnish a downtown traffic diffuser; (4) Expedite the flow of local and suburban traffic within the city; (5) Provide rapid connections between residential, business and industrial areas.

In the same way that the thruway has been correlated with the urban arterial work in Buffalo, similar tie-ins have been provided in the adjoining city of Lackawanna and elsewhere.

The Buffalo Urban Area Report was prepared in the Buffalo district office of the New York State Department of Public Works and the construction work is being carried on under direction of the writer. E. G. H. Youngmann, assistant district engineer, and engineers A. R. Erskine, M. A. Bebee, E. J. Hylant and the late E. C. Norton were in immediate charge of the preparation of the report and the ensuing studies and designs for the various projects. E. N. Scott, associate civil engineer, is coordinator of design for District 5. The late H. J. Ludden supervised construction up to 1952, and W. J. Agnew since.

Among the engineers who have had charge of construction in the field, are the following: F. E. Hurlburt, H. D. Parker, W. V. Storch, J. E. Niland, G. N. Pilger, H. R. Hilary, M. T. Broderick, I. N. Severance, A. Smith, W. S. Morrison, C. A. Stumm, J. E. Haley.

The following firms of consulting engineers are or have been engaged in surveys and designs for the various thruway and arterial projects in Buffalo and its immediate vicinity: Knappen-Tippetts-Abbett-McCarthy, Engineers; Clarke & Rapuano; Hardesty & Hanover; Andrews, Clark & Buckley; Edwards, Kelcey & Beck; all of New York City. Edward P. Lupfer Corp.; Jacob Fruchtbaum; A. Stuart Collins; Duchscherer & Oberst; Nussbaumer, Clarke & Velzy; Senior, Bissell & Bronkie; Krehbiel & Krehbiel; John R. Campbell; and Elwin G. Speyer; all of Buffalo; and Leon Wendel of Lockport, N. Y.

Construction contractors who have been engaged in this work are as follows: Depew Paving Co.; Main Construction Corp.; Seneca Supply & Equipment Co.; Brunner Asphalt & Construction; Bates & Rogers Construction Corp.; W. F. Hendrich Co.; H. F. Stimm, Inc.; D. W. Winkleman Co.; Rock Asphalt, Inc.; McLain Construction Corp.; C. B. Moon and Ferguson & Edmondson Co.; Bero Engineering and Construction Corp., and Johnson, Drake and Piper, Inc.

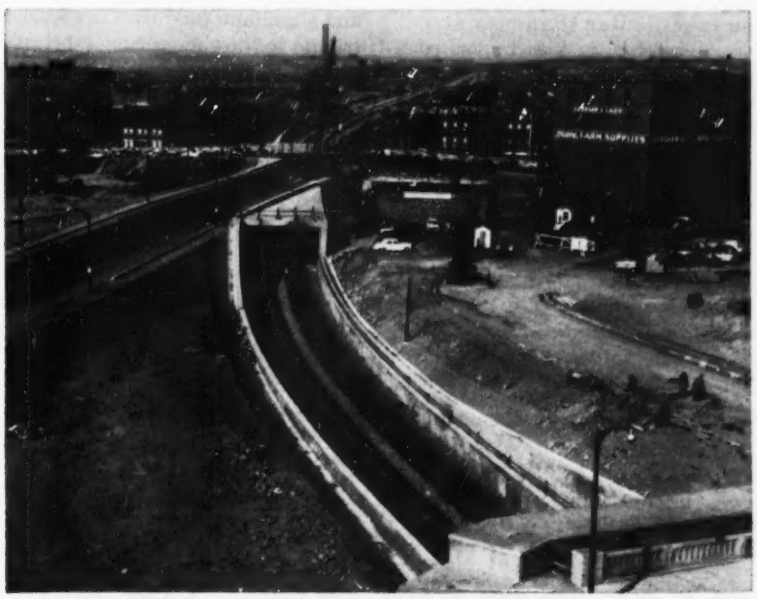

DEPRESSING THE TRACKS of the New York Central's Niagara Falls branch where they run through the center of Buffalo is a major part of the traffic relief program.

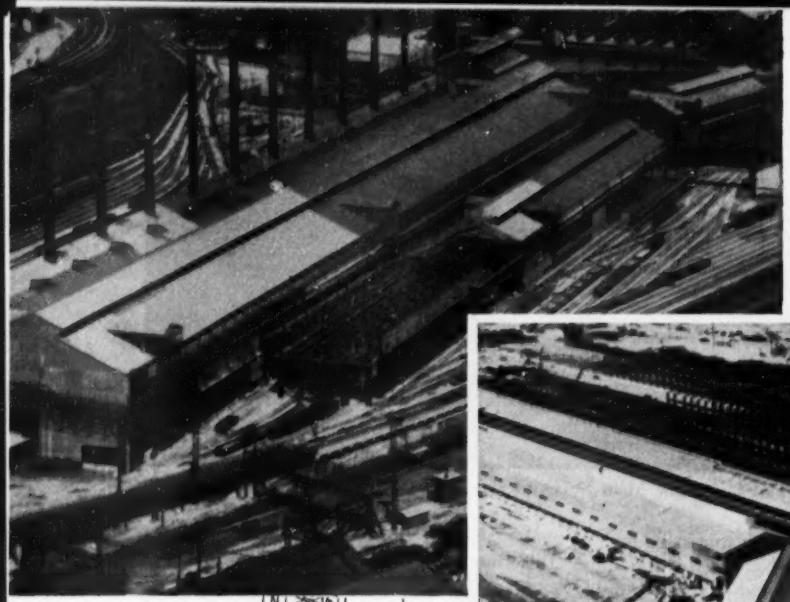

JONES & LAUGHLIN STEEL CORPORATION'S multi-million dollar expansion project on Pittsburgh's South Side.

• • •

REYNOLDS METALS COMPANY, San Patricio Plant, Corpus Christi, Texas, for increased production of aluminum.

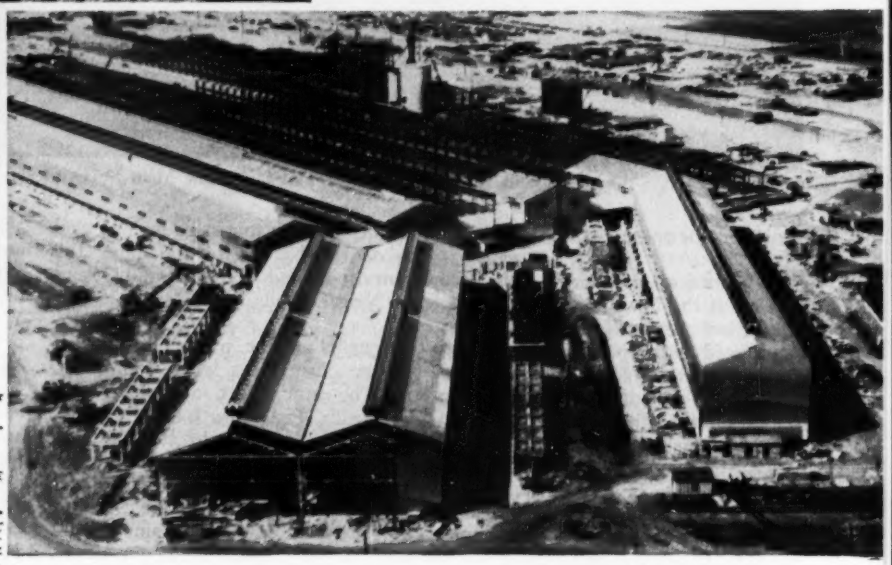

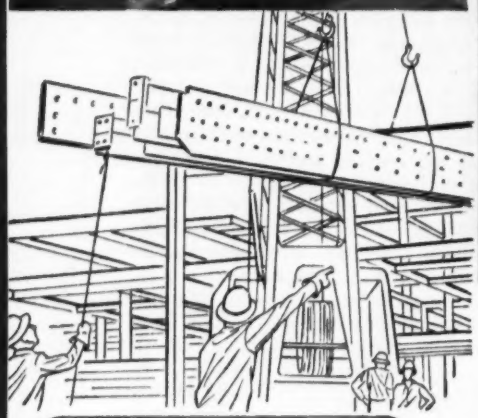

AMERICAN BRIDGE

lends a helping hand

as nation's essential industries continue to expand!

LESS spectacular than city skyscrapers, but just as important to our nation's defense and economic growth, are the unheralded industrial buildings which have been built or are now under construction all over this great country of ours.

Of the thousands of such steel-frame structures built by American Bridge, we are perhaps proudest of those we have done, or are now working on, for vital industries. Included in this group are many important metal producers.

To be selected by these leading steel and aluminum producers is a splendid tribute to the engineering, fabricating and erecting know-how of the American Bridge organization.

It is also your assurance that American Bridge has the fabricating facilities, erecting equipment and skilled personnel to handle any type of steel-frame construction with exacting precision, thoroughness and speed . . . any time, anywhere.

If you would like to know more about the advantages of American Bridge fabricated and erected steel construction, call our nearest office.

Major Industrial Buildings for Metals Production Recently Fabricated and Erected by AMERICAN BRIDGE

- **ALUMINUM COMPANY OF AMERICA**
  Point Comfort, Texas
- **JONES & LAUGHLIN STEEL CORPORATION**
  Pittsburgh, Pa.
- **LONE STAR STEEL COMPANY**
  Daingerfield, Texas
- **REPUBLIC STEEL CORPORATION**
  Cleveland, Ohio
- **UNITED STATES STEEL COMPANY**
  Fairless Works
  Morrisville, Pa.

AMERICAN BRIDGE DIVISION, UNITED STATES STEEL COMPANY
GENERAL OFFICES: 525 WILLIAM PENN PLACE, PITTSBURGH, PA.

Contracting Offices in: AMBRIDGE · ATLANTA · BALTIMORE · BIRMINGHAM · BOSTON · CHICAGO CINCINNATI · CLEVELAND · DALLAS · DENVER · DETROIT · DULUTH · ELMIRA · GARY · MEMPHIS MINNEAPOLIS · NEW YORK · PHILADELPHIA · PITTSBURGH · PORTLAND, ORE. · ROANOKE ST. LOUIS · SAN FRANCISCO · TRENTON

UNITED STATES STEEL EXPORT COMPANY, NEW YORK

AMERICAN BRIDGE

USS

UNITED STATES STEEL

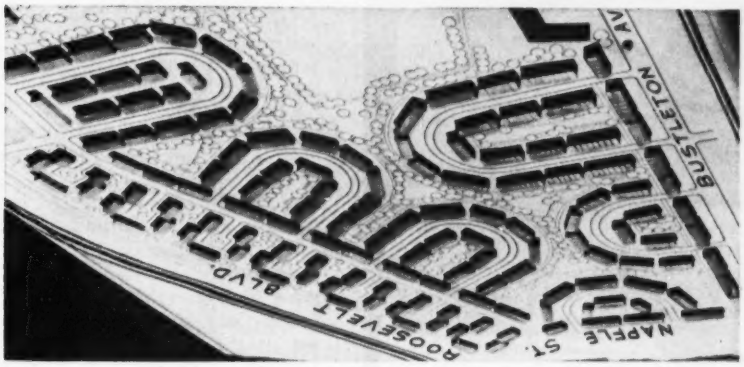

NEW TYPE row houses proposed for Philadelphia eliminate gridiron street pattern, provide for increased play areas and more attractive appearance.

New row type housing planned to eliminate monotony

Philadelphia gives row housing a new look—small units and curved streets

The old style row houses, built on a gridiron street plan in endless, monotonous rows, are making a comeback but in a more attractive setting, if plans of Philadelphia, Pa., are any trend.

The new idea was conceived by a group of local architects, builders, and civic groups under the direction of Edmund N. Bacon, executive director of the Philadelphia Planning Commission. It provides for a maximum of ten homes in any one group—the groups staggered and placed on curved streets to create more open space.

Behind the plan was the demand for low cost private housing in Philadelphia and the diminishing area available for this type of construction.

• **Large project**—First project to get under way is at Roosevelt Boulevard and Rhawn St. in the northeast section of the city. The tract of 67 acres will be improved with 1,041 homes at an estimated cost of $10-million.

The Philadelphia Board of Education has signified its willingness to erect a school on the tract. Footwalks provided in the rear of the homes will permit children to walk blocks to the school without once crossing a street.

Other features of the development will include garden spots in the rear of the homes, absence of through traffic within the area and the use in one part of the development of streets dead-ending in a turn-around.

Two years were spent in developing the plan. Reasons for this particular type of development are outlined by Bacon:

"Our job, as I see it, is to encourage the building of the lowest cost house that can be constructed and still meet the proper standards in regard to size, quality and placement on the land.

"The Philadelphia row house is one of the most economical building types for the normal American family that has ever been invented. The main thing wrong with it . . . . . is the way it has been placed on the land."

Bacon said further that the old style development failed to provide adequate play area for children and that the gridiron pattern presented dangerous raceway conditions in the streets and in the rear areas of the homes.

"If we can correct these safety hazzards and detrimental features by new ways of putting the houses on the land, by new community patterns, and still preserve the basic construction economy of the row house," he continued, "we will have made a major advance in meeting the needs of as wide a cross-section of families as possible by private enterprise."

Zoning changes—To encourage this type of project, the city provided a new class of zoning, C-1, to supplement the usual Class D which covered the old style row house. Claims are that this new class will also spur construction of low-cost private housing on various small tracts within the city. Previous attempts to erect row houses have met with opposition from neighborhood home-owners in the more expensive home brackets who believe land values would suffer with the erection of straight line row houses.

Federal land sale delayed in North Carolina

The Federal Government has agreed to delay for 60 days the sale of 18,000 acres of land on the Yadkin River in North Carolina, to give cities and towns there "a chance to plan to use it to increase the water supply of the area." The land was acquired originally nearly 20 years ago for a since-abandoned hydro-electric project.

A delegation representing Greensboro, High Point, Winston-Salem and Lexington, all in North Carolina, sought the delay to allow time for organization of a Central North Carolina Development Commission which would take over the land as part of a long range effort to provide more water for those cities as well as for several smaller communities. A survey of the water problems of the region indicated that the Yadkin River is the only logical supplemental source for increased water supplies.

Development of the area would require construction of a large impounding dam costing about $20 million, and as yet no study has been made to determine if the water flow is sufficient to make construction of this dam economically feasible. No estimate has been made on the cost of the land.

Subway starts . . . at last

After 35 years of setbacks, disappointments and heavy jokes about Philadelphia's subway that didn't go anywhere, the Locust Street Subway was formally dedicated on Friday, the 13th of February.

Ground for the subway extension was broken on Oct. 2, 1917, but the first World War halted the project during the initial stages. Work was not resumed until 1933, but in 1939 lacks of funds caused the tube to be sealed again.

The second World War caused further delays and nothing was done about equipping the subway until 1950. High prices and defense priorities were a headache during the last three years.

Servicised
PREMOLDED
JOINT FILLERS

A COMPLETE LINE
FROM ONE SOURCE
TO MEET ANY REQUIREMENTS

KORK-PAK*
Exclusive with Servicised. Lowest cost non-extruding joint filler. 80% recovery after compression. Low moisture absorption. Readily handled without breakage.

SELF-EXPANDING CORK
For positive joint filling. Specially treated to expand 50% beyond original thickness after compression to keep joint filled under contraction which opens space to more than original size.

ASPHALT
Forms an easily compressible cushion. Highly waterproof, low in cost. Made in 5 thicknesses in any length or width. Formed between two sheets of asphalt saturated felt paper which increases strength and rigidity, improves handling.

SPONGE RUBBER CEMENTONE
Blends with color of concrete. For use in architectural concrete structures such as bridges, viaducts, etc., where black color of ordinary fillers would be objectionable. Fully resilient —non-extruding.

CORK
High recovery factor (95%) after compression, non-extruding qualities and light color make Cork Joint Filler ideal for use in flood walls, outlet works and spillways, sewage treatment plants, filtration plants and bridge construction.

WRITE FOR THE COMPLETE SERVICISED CATALOG.
Describes the full line of Servicised Asphalt, Cork, and Rubber Composition products.

**KORK-PAK is one of the many Patented products developed for the Construction Industry by Servicised Products Corp.*

SERVICISED PRODUCTS CORP.
6051 W. 65TH STREET • CHICAGO 38, ILLINOIS

RUBBING CEILINGS?

DO IT FASTER EASIER BETTER CHEAPER WITH A

GIRAFFE

● With the grinding head automatically held against the ceiling at the proper pressure, the operator needs only to guide the machine.

FOR CEILINGS UP TO 12 FEET

GIRAFFE®

CONCRETE GRINDING CORP.
300 STRAIGHT ST. PATERSON, N. J.

MUNICIPAL

Air pollution gets attention in Oregon

Oregon's Air Pollution Authority has issued its first cease and desist orders under powers given it by a 1951 law. Targets of the orders were the Nu-bora Soap Co. in Portland's crowded northwest industrial-commercial district, and a refuse dump in North Portland.

Nu-bora was given 60 days to control soap dust which the authority accused it of allowing to pollute the neighborhood; the dump operator was given 30 days to abate smoke, odor and fly-ash nuisances. The complaint against the dump was filed in June, 1952, by the National Biscuit Co. which operates one of the West Coast's largest baking plants nearby.

Air pollution violations are considered misdemeanors under the law.

• **State-wide study**—Results of a state-wide air-pollution study were announced by Engineer Richard E. Hatchard, who reported ash and smoke from sawmill waste burners appeared to be the major contributing factor in problem areas. The survey was recently conducted under a grant of $90,000 appropriated by the Oregon legislature.

North Bend, a big lumber center in Coos County on the coast, was the only community where samples showed pollution of more than 100 tons of material per square mile per month. Coquille in the same county had a rating of 50 to 100 tons per month, again because of lumber burners. Cities with ratings of 25 to 50 tons, which Hatchard considers to be a nuisance in residential areas, are Portland, Oswego, Coos Bay, Toledo, Newport, Klamath Falls, Nyssa and Roseburg.

New Milwaukee parking law arouses opposition

Milwaukee's new off-street parking ordinance (ENR Mar. 12, p. 60) has become a conversation piece in building circles in that Wisconsin city. Of greatest interest is the requirement that apartment buildings provide parking space for two cars for every three apartments.

Architects and builders agreed that the idea has merit but that land costs in the central area of the city are too high. They claim that apartment building costs will become prohibitive until land values drop to a point where the projects again will be economically sound.

One municipal official agreed that

there may be a drop in land value as a result of the ordinance, but added:

"But we in Milwaukee used to build entirely too tightly. This, I think, will bring more light into the central area.

"When Milwaukee's zoning law was adopted originally in 1920, we took a negative approach on parking. Now we are trying to change the whole philosophy. The commission's planning staff studied similar ordinances from all over the country. The result here is their best judgment. If it won't work, of course, it can always be amended."

• **Parking study**—One architect contends that many of the new downtown apartment buildings contain a large percentage of "efficiency units" rented by people who generally don't own cars, and that the ordinance should provide for a flexible requirement depending on the type of apartment predominating in the various areas.

"We have developed studies to show that for buildings with three bedrooms there should be 100% parking provided; for two bedroom units, it should be about 66%; for one bedroom 50%, and where there are only efficiency units, 20%."

FHA requirements for the city are on a sliding scale according to the location of the building. In the downtown area it is believed that the generally smaller apartments and the comparative lack of car ownership do not demand more than one parking space for each two living units. In the outskirts of the city, the ratio is increased to one to one.

Legal loophole

A loophole in the law enabled Cleveland, Ohio, to award an engineering contract to the firm of a member of the city's Board of Standards and Appeals.

Law Director Joseph H. Crowley said that the contract legally could be awarded to an engineer of the firm as an individual, and that the engineer could then arrange with the company for the performance of the contract.

Crowley added that unless the charter is changed "the city may be faced with mass resignations of board members anxious to have their companies considered for city business." As it stands now, members of part-time boards are considered officials of the city and thus automatically are disqualified from bidding on city contracts.

MILITARY — General purpose warehouse for Radford (Va.) Arsenal. Twelve 60' span timber trusses fabricated by J. A. Jones Construction Co., using TECO connectors.

Build those MILITARY, COMMERCIAL and INDUSTRIAL BUILDINGS Now with TIMBER, using TECO WEDGE-FIT connectors

Timber is plentiful, as usual—

TECO WEDGE-FIT connectors for strong, efficient timber joints, and Trip-L-Grip framing anchors for secondary connections, are immediately available—

Timber fabricators in all sections of the country are ready to supply your needs in timber trusses and framing.

Free booklet, "Timber for Military, Commercial and Industrial Buildings", has 20 pages depicting hangars, warehouses, garages, stores and factories, built with the TECO timber connector system, glued laminated and Lamella construction. Send TODAY for a copy — use the coupon or your letterhead.

TIMBER ENGINEERING COMPANY 1319 18th STREET, N.W. WASHINGTON 6, D. C.

Chicago • New Orleans • In Canada: J. E. Goodman Sales, Ltd., Toronto

Please send FREE booklets, "Timber for Military, Commercial and Industrial Buildings" and "Trip-L-Grip Framing Anchors".

NAME.....

FIRM.....

STREET.....

CITY..... ZONE..... STATE.....

ENR

Critical Jobs are Routine for JOHNSTON PUMPS . . .

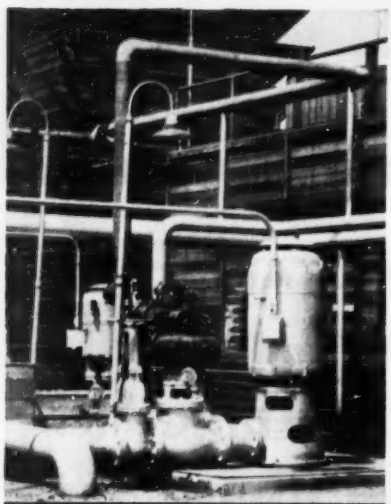

Take Cooling Towers *for example*

Three Johnston Pumps were selected for this cooling tower job by the firm which engineered and constructed this large oil refinery in Oklahoma, because . . .

Large savings were effected on installation costs. Higher efficiency meant lower operating costs. The flat horsepower curve of the Johnston vertical turbine pump allows operation against throttled discharge or reduced heads without overloading the driver. Vertical, hydraulically balanced design eliminates radial thrust and consequent bearing wear, thus cutting maintenance costs to the bone.

This is another typical example of the ability of Johnston equipment to handle all types of pumping jobs. Why not let our engineers consult with you on YOUR particular problem?

Send for your free copy of the new bulletin about Johnston close-coupled vertical turbine pumps. Ask for Bulletin L-33.

JOHNSTON VERTICAL PUMPS

JOHNSTON PUMP COMPANY
3272 East Foothill Blvd.
Pasadena 8, California

State halts city sewer work

All sewer extensions for the Metropolitan Sewer District of Louisville, Ky., have been ordered held up pending definite plans for a sewage treatment plant. The order, issued by the Kentucky Water Pollution Control Commission, directly affected numerous subdivision developments on which work was halted until sewers can be provided.

The reason for the order was the lack of progress on plans for a sewage treatment plant estimated to cost $12 million. The city of Louisville and the sewer district have agreed that a bond issue probably will be necessary to finance the project, but both are reluctant to assume responsibility for the bonds.

The immediate effect of the order was to stop work on seven housing developments totaling about 1,100 homes, plus many smaller developments. The projects are in various stages of construction and the builders are unable to change plans to make a switch to septic tanks.

After refusing permission for two small sewer extensions, Louis F. Birkel Jr., executive director of the State Pollution Control Commission, said:

"This does not mean that the commission will refuse permits for sewer extensions until a sewage treatment plant is built and in operation. The commission recognizes that it may be required to approve sewer additions as a safeguard to public health, and to provide for orderly community development. It does mean, however, that the commission wants to know that sewage treatment is being included in the plans of the community."

MOVING SIDEWALK in Chicago's Museum of Science and Industry made its debut last month. The new rubber walk carries visitors 68 ft through part of a rubber exhibit in the museum. Built especially for the exhibit, the sidewalk operates on rollers like a continuous belt. Similar moving walkway devices are being considered for use in New York City. (Wide World photo)

in 1953 for the 16th Consecutive Year

ONLY AUSTIN-WESTERN POWER GRADERS give you ALL-WHEEL DRIVE PLUS ALL-WHEEL STEER

the matchless combination that delivers unequalled performance

Austin-Western

Power Graders
Road Rollers · Motor Sweepers

BALDWIN BLH LIMA-HAMILTON

Construction Equipment Division

Manufactured by
AUSTIN-WESTERN COMPANY
Subsidiary of Baldwin-Lima-Hamilton Corporation
AURORA, ILLINOIS, U.S.A.

New Scruggs Vandervoort Barney department store in fashionable Clayton, Missouri. Architect: Harris Armstrong. Consulting Engineer: Neal J. Campbell. Contractor: Gamble Construction Co.

QUALITY CONSTRUCTION *begins with...*

LACLEDE CONSTRUCTION STEEL

Quality controlled from open hearth to finished product in the modern Laclede Mills, these construction steels offer dependability of quality for your construction needs



STEEL JOISTS

For strong . . . lightweight . . . economical construction. Spans to 40 feet.



WELDED WIRE FABRIC

Cold drawn, welded automatically . . . in rolls or sheets.



MULTI-RIB ROUND REINFORCING BARS

With Laclede improved design for maximum anchorage . . . and numbered to meet latest ASTM A305 Specifications.

Other Laclede quality construction steels: corrugated centering accessories • spirals • pipe and conduit.

LACLEDE Producers of Construction Steel

LACLEDE STEEL COMPANY
St. Louis, Mo.

DRILLING CONTRACTORS

Diamond and Shot Core Borings
Dry Sample Borings
Grout Holes and Pressure Grouting
Foundation Testing for Bridges, Dams and other Heavy Structures

Manufacturers, also, of Diamond Core Drilling Machines and complete accessory equipment, including all types of Diamond Drilling Bits. Ask for Bulletin 320.

SPRAGUE & HENWOOD, Inc.
Dept. E, Scranton 2, Penna.

PHOENIX BRIDGE COMPANY

Engineers—Fabricators
Erectors

Structural Steel
BRIDGES and BUILDINGS

AISC

General Office and Shops
PHOENIXVILLE, PA.

Subsidiary—Barium Steel Corporation

MUNICIPAL

Zoning barrier cleared for Levitt's de luxe homes

With the last legal obstacle cleared away, William J. Levitt & Sons, Inc., expects to start building $18,000 "country club" homes at its Levittown, Pa., site soon.

A restriction in the zoning code of Middletown Township had prevented the firm from going ahead with its announced plans for the de luxe homes. Before amendment early this month, the zoning code had required all building lots in Middletown Township to contain at least 15,000 sq ft—3,000 sq ft more than Levitt had earmarked for each of the country club houses.

The amendment adopted by the township's Board of Supervisors, sets a 12,000-sq ft minimum lot size. It was favored by two of the board's three members because "Levitt is setting aside recreational areas which will more than equal 3,000 sq ft per house."

Municipal Briefs . . .

• **Sewer projects**—A contractor alleged to have done unsatisfactory work on city playgrounds has been barred from bidding on sewer projects totaling over $300,000 by the Philadelphia, Pa., Department of Procurement. This is the first action of its type in Philadelphia for many years and is taken as an indication of the current administration's get-tough policy.

• **Water pollution**—City officials of Houston, Tex., are worried over a pollution threat to the new water supply reservoir project on the San Jacinto River. The multi-million dollar job, scheduled for initial flooding in mid-summer, now receives the salt water discharge of oil well operations on the upper reaches of the river.

The city has petitioned the state attorney general's office to force oil field operators to stop dumping their salt water into the stream, thereby relieving a contamination hazard.

• **Street repair aid**—North Carolina legislators last month had two bills presented to them, designed to further street repairs in towns of 1,500 or less. The first bill would require the State Highway Department to do the desired street work upon request of the town, and the department then would charge the cost of the work against the town's share of state highway funds set aside as state aid for municipal streets. Similarly, under the second proposal, the Highway Commission

would set up credit on its books for small towns. Upon request of the town, the commission would do street work to the limits of the credit. The bill was referred to a subcommittee.

• **Tin can salvage**—Tin cans from garbage salvage operations have been ticketed for Arizona's copper industry. The city of Phoenix has entered a contract with Chemex Systems, Inc., to provide for removal of the cans from city garbage and trash collections. Cans will be given a furnace treatment to burn off paper and waste, pounded flat and transported to copper smelters for use in copper recovery processes. Chemex will erect a plant near the city's cut and fill disposal site.

• **New rail station for Canton, Mass.**—Another move in the trend toward perimeter parking lots to serve metropolitan mass transport services was brought to light last month as the New York, New Haven & Hartford Railroad Co. announced plans for a new station at Canton, Mass. The plan has two aims: To relieve downtown streets of traffic and to provide hard-pressed commuters' lines with new sources of revenue. A railroad official said the plan calls for a $250,000-station large enough for 18-car trains and for a 10,000-car parking lot.

• **Approval needed**—By only a two-vote majority, Cleveland's City Council last month passed an ordinance requiring council approval on all future housing projects. More than 6,000 units of public housing are planned for the city. Under the new ordinance, each project must be approved separately by council.

• **Bridge New Orleans canal**—A four-lane bridge crossing New Orleans' industrial canal will relieve partially the traffic congestion in that city, officials hope. The state's department of highways will build the structure from a $30-million highway bond issue, of which $1 million was earmarked for the canal crossing. Construction is expected to start in late summer.

• **Growing pains**—$9 million is the estimated cost this year for improvements to the Cleveland, Ohio, water system to keep up with the growth of suburban areas of the city. Included in this amount is $4.9 million for laying new mains, $1.9 million for improvements to the Pleasant Valley Road pumping station and the division filter plant, and $2.4 million for electrification, landscaping and new buildings.

Number 3 of a series

MYSTIC RIVER BRIDGE

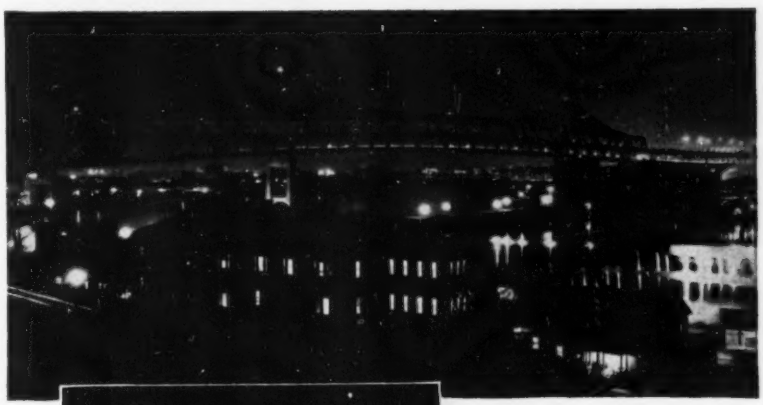

FIRST TOLL FACILITY in the UNITED STATES with

PREASSEMBLED TOLL BOOTHS

The Mystic River Bridge in Boston was the first *complete* installation of Taller & Cooper factory assembled, site-erected toll booths in the United States.

By using T&C all steel toll booths, the Mystic River Bridge Authority was assured that the bridge would open on schedule. Result: *The entire toll collection system was in place, and ready for operation weeks ahead of time.*

Ease of erection—minimum interference with traffic—increased protection of revenues and personnel—complete dependability—characterize every Taller & Cooper installation.

TALLER & COOPER, INC.
Engineers-Manufacturers
75 FRONT STREET • BROOKLYN 1, N. Y.

THERE IS TALLER & COOPER TOLL COLLECTION EQUIPMENT ON EVERY MAJOR TOLL FACILITY IN THE UNITED STATES

Can you use a man with 87 years of experience?

He represents Socony-Vacuum—
a company which has served industry
since 1866... provided the first
lubricants for contractors' equipment.

This man is backed by more time-tested
products than any other oil company
representative... by more graduate
lubrication engineers... by more technical
service laboratories... in short, by
the *world's greatest lubrication knowledge
and engineering service!*

We sincerely believe that a man with
such a background can surely help increase
the efficiency of all your equipment—
reduce your maintenance costs—
consistently make your operation more
profitable. *Why not give him a trial?*

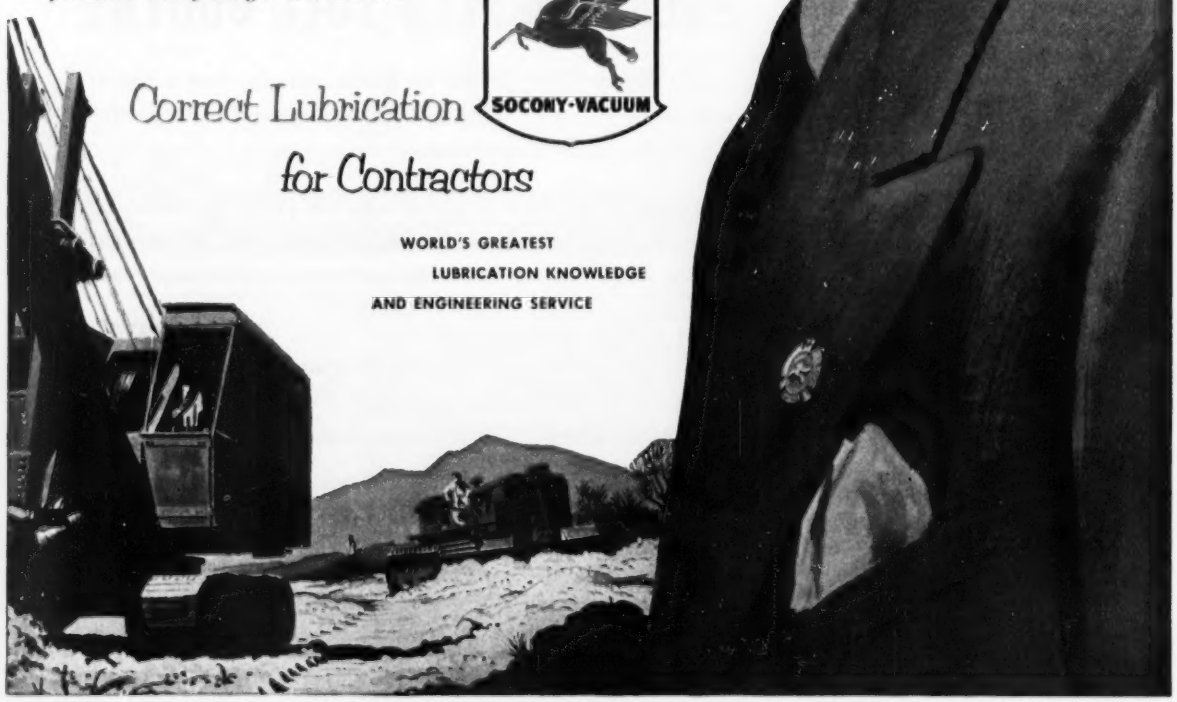

SOCONY-VACUUM

Correct Lubrication for Contractors

WORLD'S GREATEST
LUBRICATION KNOWLEDGE
AND ENGINEERING SERVICE

THE FLYING RED HORSE COMPANIES: SOCONY-VACUUM OIL COMPANY, INC., MAGNOLIA PETROLEUM CO., GENERAL PETROLEUM CORP.

Aqueduct spans valleys with Yokohama water

Two elevated aqueducts 1,551 and 1,008 ft long, tower 71 and 98 ft above valleys crossed on their route to Yokohama, Japan, from a new extension of that city's water supply. The extension project, designed and constructed under direction of Isao Ibuka, chief engineer of the extension section, Yokohama city water works, is one of many such projects undertaken in postwar Japan to meet increased demand for water.

Details of his two unusual structures come from Mr. Ibuka through Dewey M. Radcliffe, utilities engineer, Engineer Section, Headquarters Armed Forces Far East. By way of introduction to his description, Mr. Radcliffe says:

"Water supply has been a paramount problem of U. S. Armed Forces occupying Japan since late 1945. It was apparent from the start that demand by the Army would outstrip inadequate available supplies. Responsible Japanese agencies and engineers had expansion plans, but war with its materials hardships had prevented any actual construction in the years since the war.

"At the end of the war, distribution system repairs needed attention first. Mains were generally intact, but service lines to damaged buildings were badly disrupted. It was not unusual, during 1946 and 1947, for water lost by leakage to amount to more than 60% of the total produced. Electronic leak detectors introduced by the U. S. Army helped in locating and eliminating much of the water waste by leakage."

It was found that "in many cases reduction of leakage alone was not enough to meet ever-increasing water demands."

• **Aqueduct structure**—A concrete aqueduct was chosen to transmit water 4.5 miles of the way from the new supply. Chief reason was the postwar shortage of steel. A large diameter pipe would have been required to carry the 82-mgd flow, and if it had followed the route of existing pipelines through populous areas it would have caused relocation of inhabitants. The 7.2x7.8-ft aqueduct constructed has a 230-cfs capacity, a 0.0006 slope.

Elevated aqueduct across the valleys was chosen in place of inverted siphon for the reasons stated by Mr. Ibuka in the box herewith. Head loss was a major concern. The aqueduct was considered less susceptible to serious failure in event of earthquake than a siphon operating under comparatively high water pressure. Costs were estimated to be about equal in either case.

• **Seismic design**—Simple beam construction incorporating girders in the steel channel was adopted as the design found most economical and most readily constructed.

Of particular concern to the aque-

Why Isao Ibuka built it up in the air

An elevated channel for this Yokohama aqueduct in lieu of the conventional inverted siphon was the choice of Chief Engineer Isao Ibuka. These are his reasons for and opinions about the choice:

"The first (reason) arises from a purely technical standpoint. That is, since the hills are rather low—considering hydraulics—a siphon would result in accruing of loss of head and this loss in turn would impose a difficult problem on the construction of the channel itself. When designed against emergency (mainly earthquakes), the steel aqueduct would be equal to the siphon in regard to cost as well as degree of safety.

"The other reason stems from the standpoint of operation of the water supply business. Most of the results of my labors during twenty-odd years in this business lie hidden in the ground from the public eye. Commercially, for the purpose of raising loans, advertising and water-saving campaigns, I have conducted a survey of laymen. From it sprang the idea that once the method is proved technically sound and there is no difference in the safety and cost, it would be very effective commercially if the work were above ground, in full view of the general public of the community.

"When I first stood on the completed steel aqueduct, momentarily I was seized with the illusion that I was standing on the rainbow of my dream-like plan. But as I gazed on the grand panorama of solid foundation and tower on the ground and the steel aqueduct spanning the long valley, I was brought back to actuality and was glad that I had acted on my conviction."

Wood Piles Above Water Table are Permanent

When Pressure-Creosoted and Correctly Used

Major building codes recognize pressure-creosoted piles, cut off above water table, as permanent. Such foundations are today demonstrating their efficiency by bearing the tremendous loads of towering multi-story buildings. Write for Booklet WO5-100 which tells the story of wood piles.

KOPPERS

KOPPERS COMPANY, INC.
Wood Preserving Division
PITTSBURGH 19, PA.

HOW TO MAKE 1 CONCRETE VIBRATOR DO THE WORK OF 2-

A prominent user of Vibro-Plus Internal Vibrators says one Vibro-Plus does the job of two ordinary vibrators. He says his concrete tests very high—and costs substantially less. Vibro-Plus will save money for you, too—cutting your concrete time and labor costs up to 60%. There are gasoline, electric and pneumatic models (with shafts and heads all interchangeable). All three deliver vibrating frequencies of from 11,000 to 15,000 per minute... yet operating and maintenance costs are low. Write today for bulletins and nearest distributor.



VIBRO-PLUS PRODUCTS, INC
54-11 Queens Blvd., Woodside, L. I.

Table-1 Stress and Used Section

	Member	Mark	Stress	Used Section	Remarks
Tower	Main Posts	(U-1)-(U-2) ~ (U-4)-(U-5)	σ_{al}=16,780 σ_{ac}=16,239	2-L 12"×3½"×⅜"	
	Horizontals	(U-1)-(U'-1) ~ (U-5)-(U'-5)	σ_{al}=12,443 σ_{ac}=11,529	2-L 7"×3"×9/32"	
	Struts	(U-1)-(L-1) ~ (U-5)-(L-5)	σ_{al}=13805 σ_{ac}=4,721	2-L 7"×3"×9/32"	
	Diagonals	(U'-1)-(U-2)	σ_{al}=12,443 σ_{ac}=7,321	2-L 6"×3"×¼"	
		(U-2)-(U-3) ~ (U-4)-(U-5)	σ_{al}=17,064 σ_{ac}=12,113	1-C 6"×3"×½"	
		(L-1)-(U-2) ~ (L-4)-(U-5)	σ_{al}=17,064 σ_{ac}=14,220	2-L 3"×3"×⅜"	
Diagonal Post at Support		Movable Joint	σ_{al}=17,064 σ_{ac}=14,220	1-C 7"×3"×9/32"	Diagonal Post at Support
		Fixed Joint	σ_{al}=17,064 σ_{ac}=8,780	2-L 3½"×3½"×⅜"	
Girder		Upper Flange	σ_{al}=16,922 σ_{ac}=13,034	2-L 6"×4"×½" 1-PL 1'-1⅜"×½"	Web Plate
		Lower Flange	σ_{al}=17,064 σ_{ac}=15,577	2-L 6"×4"×½" 1-PL 1'-1⅜"×½"	Bottom Plate
Bottom Plate				1-PL ½"	



σ_{al} : allowable stress excluding allowance for seismic load: lbs/in²
σ_{ac} : ~~actual~~ Stress: lbs/in² at seismic incidence

duct designers was ability of the high, top-heavy structure to endure earthquakes. The disastrous experience of 1922 and the frequent quakes of varying intensities to which the country is subject had a definite influence on design factors.

Guidance on this particular problem was obtained from Dr. Tanaka, professor emeritus at the Tokyo University, an authority on bridges in Japan. A departure from customary procedures was devised.

Arms projecting laterally from points of support at the top of the tower are connected with struts to the water-carrying channel and the main tower post. Any seismic force on the channel is first applied to the struts, through which it is then transmitted to the tower. Struts are pin-connected to the arm and to the channel; this pin-connection affords movement under temperature changes.

Calculations for seismic stress were as follows:

W = weight of water plus dead weight of steel = 4,711 lb/ft
L = length of girder = 85.2 ft
Ws = seismic force = W + seismic acceleration = 4,711 lb + 0.4 = 1,844 lb/ft of girder

The seismic force which is calculated as applied to a strut is as follows:

Ps = lateral seismic force = Ws + L/4 = 40,150 lb
Ms = Ps/2 + height of girder = 40,150 lb/2 + 8.53 ft
Sa = stress on strut = Ms/d = 52,170 lb, where d is the moment arm.

• **Expansion joints**—Expansion joints were installed on the panels of the girder beams. U-shaped steel plates were used for this purpose. Rubber packing was used between the U-shaped steel plates and girder to insure water-tightness.

Erection of the steel aqueduct was accomplished with a crane and two cables used for hauling steel materials. In constructing the girder, a roller was installed on the top of the tower. Rails were attached upside down underneath the lower flange of the assembled girders and assemblies of two and three members each were slid on the rails and roller from the

"...reinforced concrete was selected on the basis of economy"

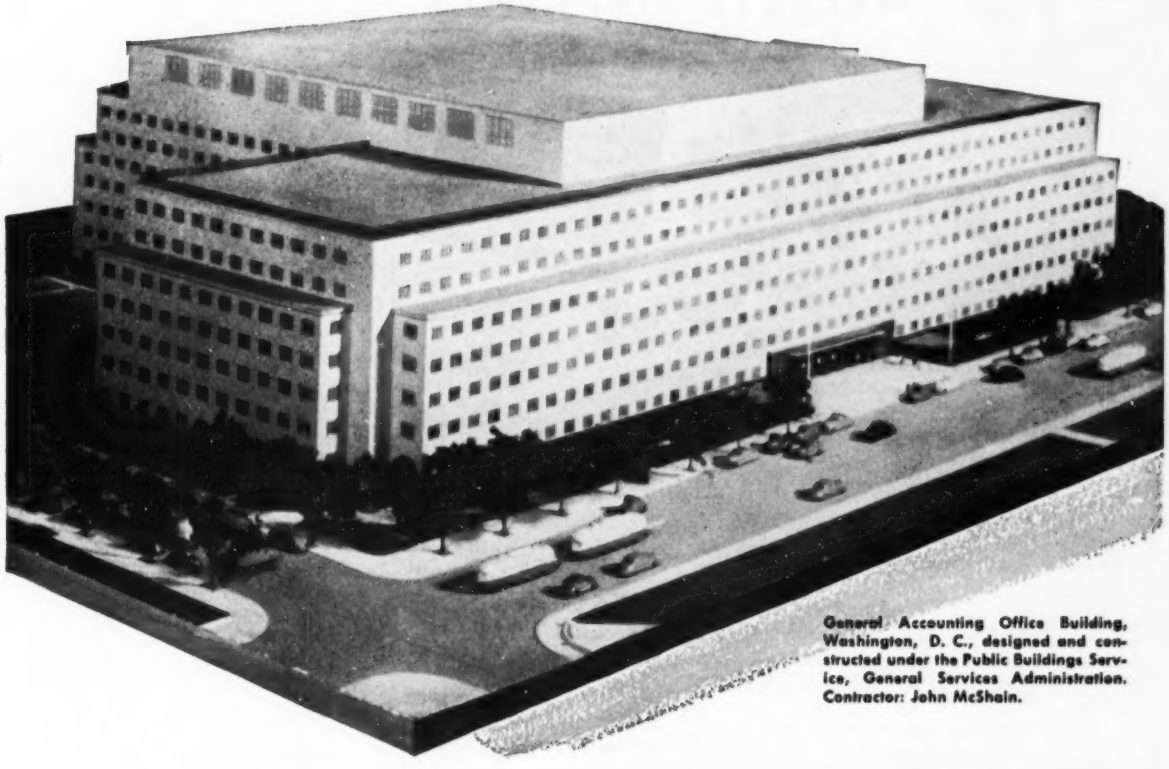

General Accounting Office Building, Washington, D. C., designed and constructed under the Public Buildings Service, General Services Administration. Contractor: John McShain.

CUT YOUR STRUCTURAL COSTS with REINFORCED CONCRETE

● Because economy was such a big factor in planning this imposing new structure, every possible means of cutting costs was given careful study. As a result—*it was built of reinforced concrete!*

Engineers and builders all over the country have found that reinforced concrete *costs less!* It saves erection time, too. It is strong, durable, inherently firesafe, and highly resistant to wind, shocks, and quakes. Moreover, materials are readily available from local sources. Consider all these advantages . . . and design your next building for reinforced concrete.

CONCRETE REINFORCING STEEL INSTITUTE

38 South Dearborn Street, Chicago 3, Illinois

IT'S MASTER CHAMP

AMERICA'S No. 1 BUY

for portable

HYCYCLE VIBRATION

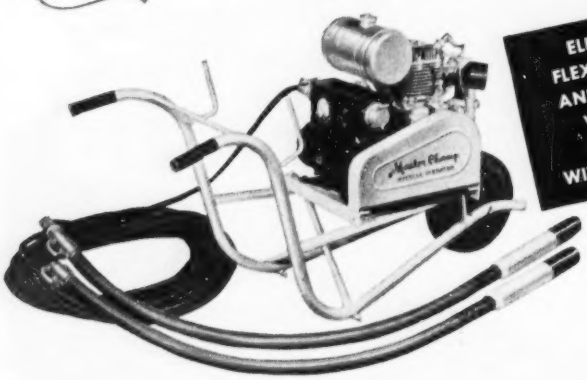

ELIMINATES FLEXIBLE SHAFT AND PROVIDES VIBRATION ANYWHERE WITHIN 300 FEET

Electric Flexible Shaft Master Vibrator (above) Gas Flexible Shaft Master Vibrator (below).

You get quick portability with MASTER CHAMP Hycycle Vibrator and two vibrating units. If you need or are using more than one vibrator . . . here's your answer to greater portability and lower cost operation. Rated vibration speed is 10,000 rpm. Also operates one vibrator and 600 watts of light or provides 1,200 watts of lighting through both single phase outlets. And for standard requirements MASTER provides its regular Portable Gas or Electric Flexible Shaft Vibrators. See illustrations at left. The electric vibrator provides dependable vibration where electric power is available. The gas model provides vibration where the extreme portability of hycycle operation is not required.

MASTER VIBRATOR COMPANY • DAYTON 1, OHIO

Master Portable Generator Plants ½ KW to 100 KW

Master Vibratory Concrete Finishing Screed

Master Power-Blow Electric Hammer and Spade

Master Space Heaters

Master Gas or Electric Concrete Vibrators

MASTER

BETTER PRODUCTS FOR BIGGER PROFITS

tower top into their final position.

• **Waterworks features**—The Yokohama water supply system, constructed in 1887, was the first modern installation of its kind in Japan. Population was then only 63,000; consumption, 1.3 mgd. Daily consumption has increased to 92.5 mgd in a city which today embraces more than one million citizens.

The city still has a serious shortage of supply, necessitating the fourth extension program. This program, when completed, will increase the nominal daily capacity of the Yokohama water system from the present capacity of 92.5 mgd to 123.6 mgd.

It is expected that this increase will meet the requirements of the city until 1970 unless there is a widespread installation of water-borne sewage facilities. Because of the present method of sewage disposal, the per capita consumption is only 85 gpd.

The fourth extension program is designed for 996,000 consumers. It could supply 123.6 mgd by 1955.

The water source is behind a 180-ft high concrete dam constructed in cooperation with prefectural authorities developing the water source for the mutual benefit of power generation, irrigation and waterworks.

One large tunnel is involved, an 11.5-ft bore 2.6 miles long conducting water to Yokohama, Tokyo and Kawasaki (Kawasaki City is located between Yokohama and Tokyo). A small tunnel, conducting water solely to Yokohama, is 8.5 ft in height and width, 3.5 miles long.

Transmission piping includes 59-in. diameter concrete, cast-iron and steel sections totaling 8.68 miles in length. Open-channel transmission in concrete aqueduct and steel valley crossings are described above.

• **Treatment**—A sedimentation reservoir was formed by construction of an earthfill dam across a natural valley. It holds 211.2 mg in a settling area of 29.4 acres.

The filtration plant is a gravity type rapid sand filter having 16 beds fed at the rate of 3.1 gpm per sq ft. Filter capacity is 68.4 mgd.

Feeder mains in sizes 18 in. to 43 in. total near 29 miles in the extension project—all cast-iron.

Yokohama will have two water sources after completion of the fourth extension work. The old one is 24.8 miles from the city, and as a result of the three previous major extension programs, 70 cfs of river water is made available. The second water source is being developed under the fourth extension program.

STEEL DECK...

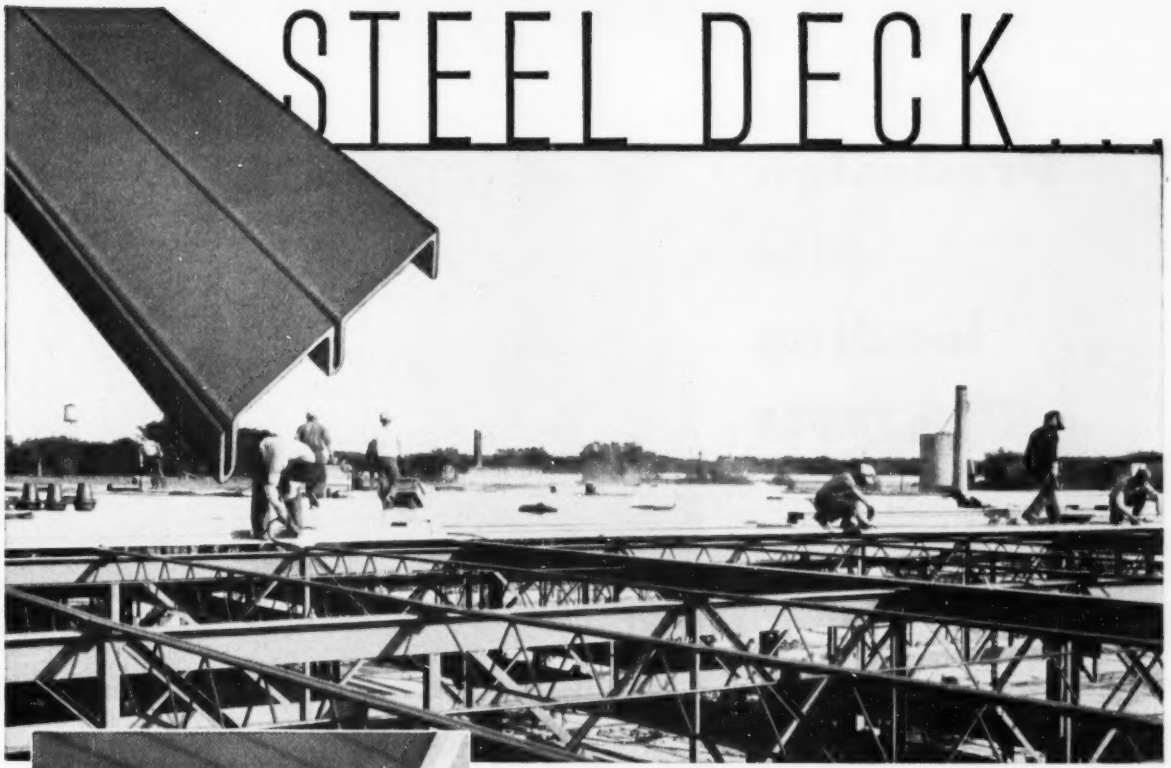

BUILT-UP SADDLES ELIMINATED

Built-up saddles are eliminated in Steel Deck Roofs. Purlins can be set to create valleys at sump locations in the drainage area. Steel Deck can be warped to conform. No additional deck plates are required—no cutting, fitting or bending necessary.

Still the Most Economical, Permanent, Firesafe Roof Available Today!

Steel Deck roofs a greater percentage of new construction year after year . . . and there's a reason for this growing preference. It lies in the following definite advantages not common to other types of roof construction: Steel Deck can be installed in any kind of weather—no waiting for materials to dry . . . it can be insulated to the exact degree to meet "U" Factor requirements in any given locality without regard to structural properties . . . and, most important, Steel Deck's light weight permits substantial savings in the supporting structure—total dead load, including insulation and waterproofing material, is less than any other type of permanent roof construction. Mahon Steel Deck is available in Galvanized Steel, Galvanized Enamel Coated Steel, or Enamel Coated Black Steel. Stiffening ribs are vertical—no angular or horizontal surfaces where troublesome dust may accumulate. In the enamel coating process, the metal is chemically cleaned, phosphated, and treated with a chromic acid solution to provide paint bond, and the protective coating of synthetic enamel is baked on at 350° F. prior to roll-forming. These Mahon features warrant your consideration when selecting Steel Deck for any project. See Sweet's Files for complete information, construction details and specifications, or write for Catalogs B-53-A and B.

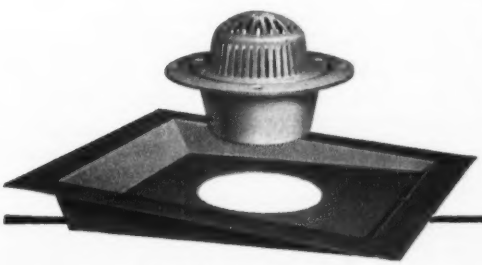

SUMP RECESSES and SUMPS

Mahon Roof Sump Recesses for use with Mahon Steel Deck can be furnished to fit any roof pitch. Mahon Cast Iron Sumps can also be furnished for 4", 5", and 6" conductors.

THE R. C. MAHON COMPANY

Detroit 34, Michigan • Chicago 4, Illinois • Representatives in all Principal Cities

Manufacturers of Steel Deck for Roofs, Partitions, and Permanent Concrete Floor Forms; Insulated Metal Walls of Aluminum, Stainless or Galvanized Steel; Insulated Metal Wall Panels; Rolling Steel Doors, Grilles, and Underwriters' Labeled Rolling Steel Doors and Fire Shutters.

MAHON

Predesign pile loading tests

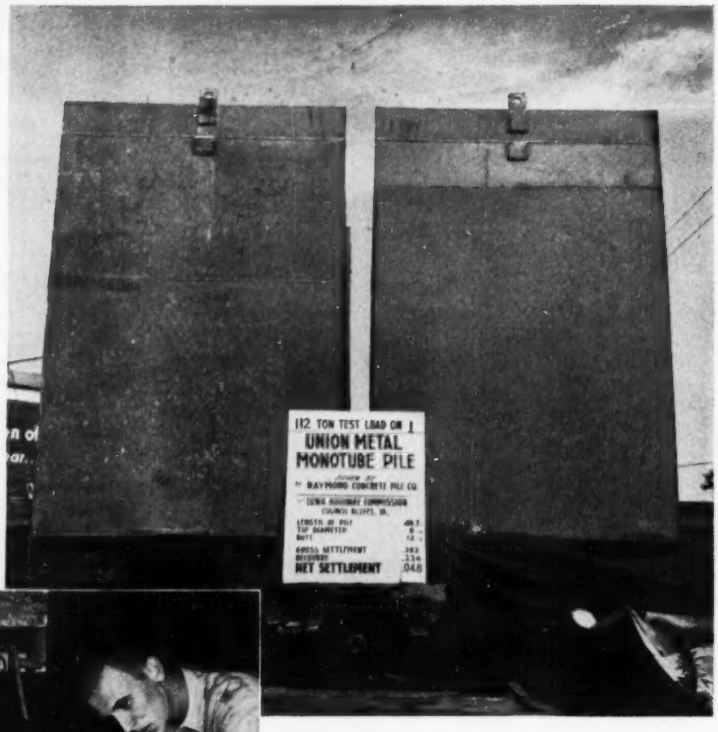

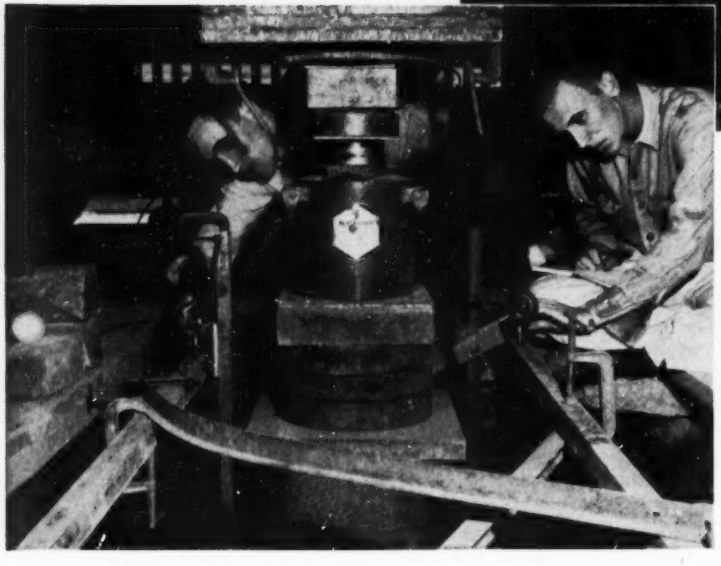

▲ Above: Four large water-filled steel tanks provided a dead load exceeding 120 tons in recent friction pile tests for the Iowa State Highway Commission.

◀ Left: During Monotube testing, dial readings were taken at specified time intervals as load increments were applied. Scales shown are only two of several reference points on instrumentation framework, which were checked by wye level each time readings were taken.

PREPARATORY to designing an overpass near Council Bluffs, the Iowa State Highway Commission conducted a series of pile loading tests. Careful engineering preparation and unusually thorough instrumentation provided highly accurate test results.

A 40-foot Monotube in fine brown sand was loaded to 112 tons with a settlement of only 0.048 inches. Specified load increments were applied by means of a hydraulic jack bearing against the 120-ton dead-weight of 4 water-filled steel tanks.

If you have foundation problems coming up, check with Union Metal for helpful engineering service . . . for accurate Monotube pile test data . . . and for the latest information on modern, easy-to-drive piles that can save you plenty of time and money. Write to The Union Metal Manufacturing Company, Canton 5, Ohio.

Monotube Foundation Piles

UNION METAL

Plan early construction of Turkish hydro project

The Turkish Ministry of Public Works will invite bids in the near future for the construction of the projected Seyhan Dam and power plant. The Seyhan project is located on the Seyhan River near the city of Adana, close to Turkey's Mediterranean coastline.

Seyhan Dam will be an earthen structure about 4,900 ft long at the crest with maximum height of about 180 ft. A 26.2 ft ID concrete lined tunnel 2,200 ft long, and steel penstocks 17.2 ft ID will carry the water to the powerhouse and irrigation outlet. Individual surge tanks over each penstock are planned.

The powerhouse eventually will be equipped with three hydro-electric power generating units rated at 22,500 kva each.

Only two generating units will be installed initially. There will be a gate-controlled spillway and an emergency overflow channel.

A report on the $32-million project was submitted to the Turkish government in 1950 by International Engineering Company of San Francisco. In the latter part of 1952, the Turkish government commissioned Knappen, Tippetts, Abbett, McCarthy, New York City consultants, to design and supervise the construction of the entire project.

International briefs . . .

• **Canadian iron ore project**—Caland Ore Co., a subsidiary of the Inland Steel Co., Chicago, has leased an iron ore body in northwestern Ontario to be developed with a $50-million Inland investment over a 7-year period. Test drillings have indicated an ore deposit of at least 50-million tons in the leased area at Steep Rock Lake, Ont.

Three million tons of ore a year, at peak production, will be shipped from Port Arthur, Ont., to Inland's mills at Indiana Harbor, Ind.

• **Pakistan hydro project**—Preliminary details for a $50-million hydro-electric and irrigation project have been worked out and approved by the Pakistan government. On the Kabul River near the Afghanistan border in northwestern Pakistan, the dam and reservoir ultimately will develop 180,000 kw and irrigate more than 100,000 acres. Canada will aid in the development project with equipment and some financing.

Torque multiplication up-to-6 times—combined with smooth, powerful, *automatic* torque converter braking—are making these Dart Model 140 Trucks stand out in hauling performance and operating economy at the Pickands-Mather Company's West Hill Mine at Coleraine, Minnesota.

The power of their 300 hp Cummins NHRS Diesel engines is delivered through Twin Disc Model CF Torque Converters—providing smooth uninterrupted acceleration on steep pulls—as power transmitted *stays in balance* with load demands. Operators control their trucks both on the steep up-grade and downhill runs with the accelerator—seldom have to shift gears, or touch the brake pedal.

In heavy-duty off-highway trucking applications, Twin Disc Model CF Torque Converters are contributing to bigger payloads handled faster . . . and sharply reduced equipment maintenance costs.

Get the full story on Twin Disc Torque Converters for all on-and-off-highway trucking applications. Write for Bulletin 501.

Twin Disc offers two truck type torque converters—Model CF (top) with *automatic* torque multiplication and downhill braking for foot-pedal control on short, steep, up-and-down hauls—and Model DF (below) with *selective* operation on all functions—downhill braking, uphill pulling, and Direct Drive for the straightaways.



Built for a Long Life . . .
Backed for a Lifetime

TWIN DISC
CLUTCHES AND HYDRAULIC DRIVES

TWIN DISC CLUTCH COMPANY, Racine, Wisconsin · HYDRAULIC DIVISION, Rockford, Illinois

BRANCHES: CLEVELAND · DALLAS · DETROIT · LOS ANGELES · NEWARK · NEW ORLEANS · SEATTLE · TULSA

Imported CASTELL
lays it on the line
• SMOOTHER—no hard spots.
• GRAPHITE-SATURATED—better adhesion.
• MORE OPAQUE — better blue and white prints.
• STRONGER—less point breaking.
• NON-BLEEDING — gives more prints — cleaner and sharper prints—even after hundreds of trips through the reproducing machine.
• ECONOMICAL—25% to 33⅓% more wear.
CASTELL
the drawing pencil with the Master Degrees
A.W.FABER CASTELL LOCKTITE U.S.A. 2H
A.W.FABER CASTELL 9000 HB
Your choice of CASTELL 9000 wood-encased pencil or balanced Push Button LOCKTITE Holder. Black or colored.
Imported CASTELL 9000 and CASTELL 9030 Imported Leads —18 degrees —full range, 7B to 9H.
A.W. FABER-CASTELL PENCIL COMPANY, INC. NEWARK 3, N.J.
*Imported from West Germany

MEN AND JOBS

J. STUART CRANDALL, consulting engineer, head of Boston civil engineers.

Crandall heads Boston Engineers

J. Stuart Crandall, consulting engineer, Crandall Dry Dock Engineers, Cambridge, Mass., was elected president of the Boston Society of Civil Engineers at its 105th anniversary meeting March 18.

Born in Nova Scotia in 1891, the new president was graduated from the University of Maine in 1915; received the degree of C. E. there in 1923, and later did graduate work at the Massachusetts Institute of Technology. After graduation, he was with the Crandall organization in this country and Cuba, and was a lieutenant in the U.S. Engineers in France during World War I.

After that war he became engineer and treasurer of the Crandall company, and in 1930 vice-president. Crandall lectured from 1935 to 1941 on harbor engineering at the Harvard Graduate School of Engineering. He was official government delegate to the 16th Congress on Navigation at Brussels, Belgium, in 1935.

Governor names six to bridge building groups

Georgia's Governor Herman Talmadge has appointed six members of the two bridge building authorities recently created by the state general assembly.

Members of the toll bridge authority include Bibb County Commissioner Kenneth Dunwoody of Macon, De-Nean Stafford of Tifton and Robert B. Lee, chairman of the Board of Commissioners of Lee County.

The second authority, created to construct modern bridges to replace worn out structures with funds from the sale of revenue certificates, is composed of Jim L. Gillis, chairman of the State Highway Board and by law the chairman of the authority; John J. McClanahan of Elberton, and Frank Binford of Thomaston.

Beightler offered Ohio Turnpike Commission job

Maj. Gen. Robert S. Beightler has been offered the post as Executive Director of the Ohio Turnpike Commission, according to an announcement from Commission Chairman James W. Shocknessy.

Gen. Beightler served as Ohio's Highway Director in 1939 and 1940 and was commander of the 37th Division in World War II. He was commanding general of the American forces stationed on Okinawa until ill health forced his return to the United States, to enable him to enter Walter Reed Hospital.

Careers . . .

• **Appointed**—**Ivan C. Crawford,** consulting engineer, Denver, has been appointed director of the Colorado Water Conservation Board. He retired two years ago as dean of the College of Engineering, University of Michigan . . . New manager of the Atomic Energy Commission's New York Operations Office is **Henry B. Fry . . . Wilbur E. Kelley** will take over as vice-president in charge of engineering for the Catalytic Construction Co. . . . **Ward R. Douglas,** secretary of the Kansas Bostwick Irrigation District, No. 2, has been named Kansas Director for the Four-States Irrigation Council . . . In charge of slum clearance in Columbus, Ohio, is **Kenneth E. Thomas,** recently appointed as the city's assistant safety director.

• **Elected**—The Council of the American Institute of Consulting Engineers has elected **Scott Turner** as its president with **Charles E. De Leuw** and **Elmer X. Timby** as vice-presidents . . . Named president of the Northwestern Society of Highway Engineers is **A. G. Skelton,** Portland district engineer, Oregon Department of Highways . . . Members of the recently former Struc-

Standard 4" x 6" Beam Type 14" x 4", and J Head 14" x 4" available

ACROW

ADJUSTABLE STEEL SHORES

Fast 1,2,3, and they're up...

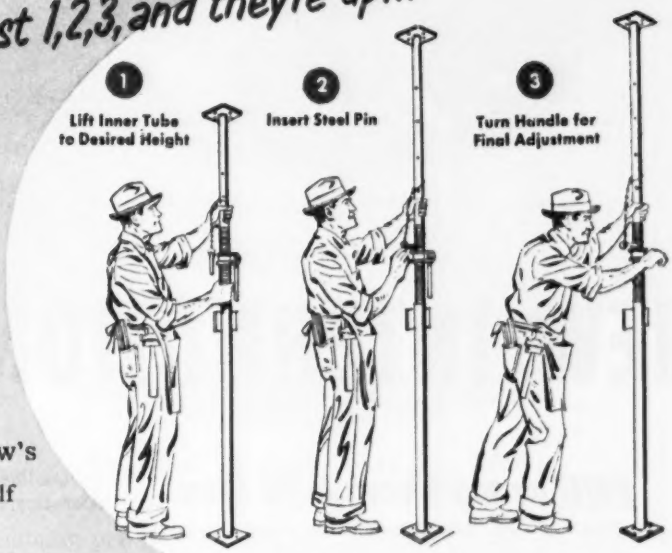

The flexibility of ACROW'S flat-type head lends itself to any size stringer—no redesigning of form-work necessary to fit shore heads, as is required with head types of limited adaptability.

- One Man Does the Work of 2
- Micro-fine, Positive Adjustment Working Ranges From 3'4"—15'
- Safe Working Load Fully Established and Guaranteed
- No Extra Attachments Required for Operation—Self Contained Unit
- Practically Indestructible—All Steel

ACROW—*The World's Largest Selling Shore—Over 1,000,000 Now in Use*

UNITED STATES OFFICES

Chicago, MIchigan 2-1010	Houston, Underwood 8514
New York, LExington 2-7595	Dallas, Riverside 6051
Boston, DEvonshire 8-7174	Birmingham, 7-5151
Philadelphia, LOcust 7-5553	Los Angeles, Lomita 2889
Atlanta, Emerson 3716	San Francisco, ATwater 2-1442

ACROW, INC., Dept EN-3C
510 North Dearborn Street, Chicago 10, Ill.
Gentlemen: Please send me the following Bulletins (Please Check)

☐ Acrow Shores ☐ Column Clamps ☐ Trench Jacks

Name .....
Company .....
Address .....
City ..... Zone ... State .....

ASSOCIATE COMPANIES

Acrow (Canada) Ltd., Montreal
Acrow Venezuela S. A., Caracas
Acrow Brazil S.A., Rio de Janeiro
Acrow Uruguay S.A., Montevideo
Acrow Argentina S.A., Buenos Aires
Acrow Peru S.A. (Ingenieros), Lima
Acrow (Engrs.) Ltd., London
Acrow Engrs. (Pty.) Ltd., Johannesburg
Acrow Engrs. (Pty.) Ltd., Sydney

New International R-184 LOADSTAR with dump body. Features the entirely new 130 H.P. "Black Diamond 292" engine. GVW rating 21,500 lbs.

NEW INTERNATIONAL TRUCKS

BUILT as only IH can build them

The 168 basic *New* International models embody the engineering principles, used in International's continuing program of truck research and development, that have resulted in hundreds of exclusive International features that have meant greater profits for truck buyers.

PROVED as only IH can prove them

The 307 features in the *New* International Truck line have been *proved* in the world's most advanced Truck Engineering Laboratory; *proved again* at International Harvester's 4000-acre desert Proving Ground at Phoenix, Arizona.

VALUE only IH can give you

The *New* International Trucks offer an unmatched combination of values—the right truck for the job, unequalled performance, lowest maintenance and operating costs, maximum driver comfort.

***Now*—the features you want—**
in America's most complete truck line

New International styling identified by the IH emblem . . . **Exactly the right power** for every job. First truck builder to offer choice of gasoline or LP gas with Underwriters' Laboratories listing in 1½-ton sizes and other models . . . **Designed by drivers for drivers.** Comfo-Vision cab with one-piece Sweepsight windshield. New comfort and interior styling . . . **Steel-flex frames** proved best in the field . . . **Transmissions** to meet any operating requirement . . . **296 Wheelbases** ranging from 102 inches up . . . **Easy starting and greater fuel economy** . . . **Wide range** of axle ratios for all models . . . **Real steering comfort and control** . . . Sizes from ½-ton to 90,000 lbs. GVW rating. Now—See The New IH-Built, IH-Proved International Trucks at your nearest International Dealer or Branch.

INTERNATIONAL HARVESTER COMPANY • CHICAGO

International Harvester Builds McCormick Farm Equipment and Farmall Tractors . . . Motor Trucks . . . Industrial Power . . . Refrigerators and Freezers

Better roads mean a better America

INTERNATIONAL TRUCKS
Standard of the Highway

tural Concrete Association elected as their president **E. S. McKittrick,** head of a California contracting company . . . **Leland M. Craig,** executive vice-president of the Southern Engineering Co., Charlotte, N. C., has been named to head the firm . . . New president of the Constructors Association of Western Pennsylvania is **Howard H. Sturdy,** vice-president of the Dravo Corp. . . . Named to the top post in the Kansas chapter of the builders' division, Associated General Contractors is **Frank E. Blaiser,** Wichita . . . **W. E. Naumann,** vice-president of the M. M. Sundt Construction Co. will head the Arizona Chapter, Associated General Contractors for the coming year . . . Elected president of the North Carolina Professional Engineers is **George S. Rawlins,** Charlotte.

• **Honored**—**Virgil E. Gunlock,** Chicago's Commissioner of Public Works, has been awarded a high service award of the Illinois Society of Professional Engineers for outstanding service to the society during his tenure as president in 1951 . . . Two Colorado engineers last month received U. S. Bureau of Public Roads meritorious service awards for contributions to road construction. **Jesse E. Williams,** Colorado district engineer, was honored for his work in Turkey, while **Clyde E. Learned,** division design engineer, was cited for his work on the Alcan highway . . . **Robert J. Commins,** Houston consulting engineer, has been recently named "Engineer of the Year" by the Texas Society of Professional Engineers.

• **Retired**—Retirement of **A. A. Potter,** Dean of Purdue's school of engineering, was announced this month . . . **Helland C. Headley** has retired as chief of construction and maintenance for the North Atlantic Division, Bureau of Public Roads . . . The University of Louisville has accepted resignation of **Wylie B. Wendt,** professor of civil engineering, who becomes professor emeritus.

• **Announcements**—Baker and Spencer, Inc., New York consultants, have announced their affiliation with Frederic R. Harris, Inc., New York. **Edward J. Quirin,** president of the Harris firm will become head of the new company . . . A new company in the wood laminating industry has been formed by **W. J. Van Arnam,** former president of Timber Structures, Inc., Portland, Ore., and **Andrew E. Toth,** former sales representative of the same firm. The new company will be known as Timber Tech Corporation.

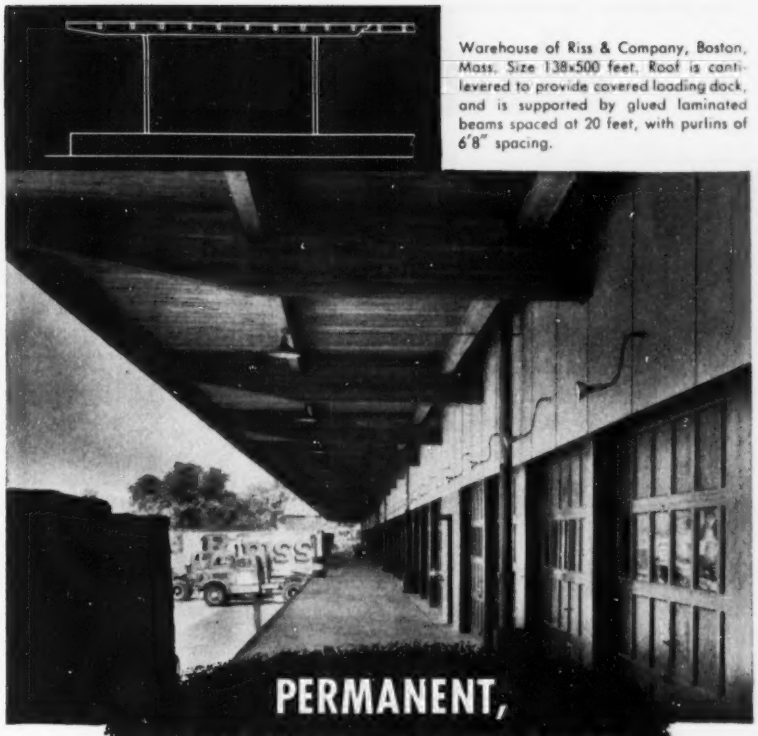

Warehouse of Riss & Company, Boston, Mass. Size 138x500 feet. Roof is cantilevered to provide covered loading dock, and is supported by glued laminated beams spaced at 20 feet, with purlins of 6'8" spacing.

PERMANENT, ECONOMICAL WAREHOUSES

designed for today's service, with flexibility for tomorrow's changes

Combining permanence, economy and adaptability, this warehouse will remain a profitable investment for generations. Large open areas of floor space promote efficient use of modern equipment and methods, make the building suitable for changing requirements of the future.

Key to the efficient design of the building is the system of glued laminated beams which supports the roof. These are dimensionally stable structural members which stubbornly resist destruction by fire, and lower construction costs due to...

Fast erection of prefabricated beams, with practically no jobsite assembly.

Low walls and no unusable cubage which reduce both construction and operating costs.

Get Full Information on Glued Laminated Timbers

Detailed information on this modern engineering material is contained in the authoritative booklet, "Modern Construction with Engineered Timbers". Get it today from your nearest Timber Structures office; or write us directly and your copy will be sent immediately.

TIMBER STRUCTURES, INC.

P. O. Box 3782-C, Portland 8, Oregon

Offices in New York, Chicago, Detroit, Kansas City, St. Louis, Minneapolis, Dallas, West Hartford, Charlotte, Seattle, Spokane

TIMBER STRUCTURES, INC., OF CALIFORNIA • Richmond, California

TIMBER STRUCTURES OF CANADA, LTD. • Peterborough, Ontario

Representatives throughout the United States and Canada

When competition threatens...

that Pioneer Edge

Why Vaughan & Moon can sell gravel for less

● Vaughan & Moon, Arlington, Virginia, went shopping. They wanted to get the jump on their competition in the important Washington, D.C.—Arlington gravel market. One way suggested itself . . . eliminate expensive truck loading by moving an efficient portable plant directly to the source of the material.

After careful study, these shrewd gravel producers chose a PIONEER 18V plant for the job. They reasoned that PIONEER'S famous Bottom Deck Feed, swivel feed conveyor, method of transfer between return conveyors, and simplicity of drives, offered the extra efficiency they sought.

Today, this little plant is a busy one. Located near Bailey's Cross Roads on Columbia Pike in Arlington County, Virginia, (only 15 minutes from downtown Washington) it's turning out 90-100 t.p.h. of 1¼ " minus material with 50% crushing The Arlington County Bureau of Public Roads is an important customer

Did this plant live up to expectations? "It's even better than we hoped", says Clarence Vaughan . . . another skilled operator who has found the way to overcome competition.

BUY BOTH!
HIGHER OUTPUT
LOWER UPKEEP

Pioneer

Continuflo EQUIPMENT

tips the balance

How Bottom Deck Feed Boosts Production

First: By an ingenious method of feeding and routing material, Bottom Deck Feed provides twice the effective screening area of ordinary plants. This makes it possible to handle a considerably greater screening load without loss in efficiency.

Second: A quick, simple adjustment of the jaw crusher makes it possible to balance the load between the two crushers *while the plant is in full operation*, without changing screens. When material in the pit runs coarse, open the jaw and let the roll crusher do more of the work. When pit material is running fine, close the jaw until it does its full share. Result: both crushers are kept busy . . . and your plant operates at peak efficiency at all times.

There's a Pioneer Portable Plant for every job

Whatever your requirement, there's a PIONEER Portable Plant that will do the job. Duplex plants are now available in seven different sizes, ranging all the way from the little 17V (and 18V shown above), to the big 46VE, with Diesel Electric Drive. All feature the exclusive PIONEER principle of Bottom Deck Feed . . . all offer the famous PIONEER EDGE in performance.

Write for further information . . . *today.*

PIONEER ENGINEERING WORKS
1515 Central Avenue • Minneapolis 13, Minnesota
(SUBSIDIARY OF POOR & COMPANY • CHICAGO)

• Please send me information on the equipment checked.

☐ GRAVEL PLANTS	☐ WASHING PLANTS	☐ MECHANICAL FEEDERS
☐ ROCK PLANTS	☐ BITUMINOUS PLANTS	☐ VIBRATING SCREENS
☐ JAW CRUSHERS	☐ APRON FEEDERS	☐ BUZZER SCREENS (LIGHT DUTY)
☐ ROLL CRUSHERS	☐ ORO FEEDERS	☐ CONTINUFLO CONVEYORS

*Name*_____

*Company*_____

*Address*_____

*City*_____ *Zone*____ *State*_____

THE *Largest* ENTRANCE in the world . . .

made for **BOEING** by

INTERNATIONAL STEEL

in co-operation with:
MURRAY WILSON, Architect, Salina, Kansas
MANHATTAN CONST. CO., Gen'l Contr., Muskogee, Okla.
JOHN F. BEASLEY COMPANY, Erectors, Dallas, Texas

Above is a closeup view of one of the giant sections of the Boeing Door.

New unheard-of dimensions in mechanical doors! That, literally, was the challenge presented by the entrance doors for the new B-47 Flight Hangar built by Boeing Airplane Company at Wichita, Kansas.

Two openings each called for eight sections—66 feet wide . . . 60 feet high—a total width of 528 feet. Two other openings were 264 wide by 60 feet high. A total opening area of 95,000 square feet! And, each section of each door had to open independently—or, all had to operate simultaneously!

International's door engineers, working with the architects and Boeing planning staff, actually helped to develop new concepts in door design to accomplish all that these doors are called upon to do. These ideas are exemplified in the completed entrance—the world's largest.

If you have a door problem—unusual or commonplace, —call in International's experienced door engineers.

INTERNATIONAL STEEL COMPANY

1950 EDGAR ST. EVANSVILLE, IND.

STRUCTURAL STEEL • INDUSTRIAL DOORS • REVOLVING DOORS • STEEL BUILDINGS

OBITUARIES

Francis A. Anderson, 69, head of the F. A. Anderson Construction Co. of Vero Beach, Fla., died there Feb. 27. Mr. Anderson, whose specialty had been marine construction until he undertook general contracting in Vero Beach seven years ago, formerly was affiliated with Great Lakes Dredge and Dock Co., of Chicago and Morrison-Knudsen Co., Boise, Idaho. He had supervised major projects in Chicago, Milwaukee, Toledo, Albany, Salt Lake City, Jacksonville, Honolulu, and other municipalities. At the time of his death, he also was resident manager of Whitesands, a beach-house and apartment development on the Atlantic Ocean at Vero. The development was built in 1952. Mr. Anderson was father of Russ F. Anderson of McGraw-Hill World News.

Samuel Edward Tarbutton, 88, one of the oldest builders and contractors in Wilmington, Del., died Feb. 24 at Newark, Del. A builder for half a century, he retired 12 years ago.

William Burder Ferguson, 75, of Hickory, N. C., who helped place the Canadian shipyards on a production basis in World War II, died Feb. 26. He was a graduate of the United States Military Academy and of the Massachusetts Institute of Technology. During World War II he was a consulting engineer with the Dominion of Canada. He was a brother of Homer Ferguson, former president of the Newport News, Va., Shipbuilding and Dry Dock Co., and of Maj. Gen. Harley Ferguson, of Washington, D. C., who directed the raising of the Battleship Maine from the harbor of Havana, Cuba, and who planned the straightening of the Mississippi River for the U. S. Army Engineers Corps.

Frank S. Sellew, 74, a building contractor and a former building supervisor for the Connecticut State Park Commission, died March 1. He was one of the planners of East Hartford's $7.2-million building program and served as clerk-of-the-works of the East Hartford School Building Committee.

William E. Swift, 82, retired civil engineer who conducted a special study in connection with the construction of the Panama Canal and planned a part of New York City's subway system, died at Harwinton, Conn., March 1. He received his engineering degree from Massachusetts Institute of Technology in 1895.

(*Continued on page 69*)

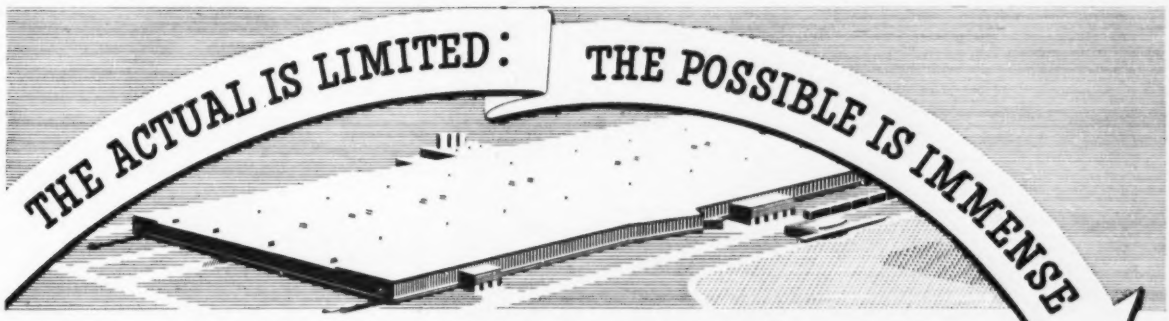

NEW LINCOLN PLANT CREATED BY INCENTIVE INSPIRED CO-ACTION IN DEVELOPING POSSIBILITIES IN PRODUCT

© LE Co. 1953

LINCOLN WELDING SPEEDS BRIDGE REPAIRS

...helps maintain Rapid Transit schedules

By **Paul K. Jones,**
Director of Transportation
Shaker Heights Rapid Transit
Shaker Heights, Ohio

BY taking advantage of arc welding in simplifying repairs, it was possible recently to save considerable time in the reinforcing of a bridge on the Shaker Heights Rapid Transit right-of-way. Cross braces that had been weakened by rusting had to be replaced with heavier members of angle iron. As this work required removal of right-of-way track, it was imperative that every effort be explored to eliminate delay in getting the track replaced. Arc welding achieved this result in addition to eliminating rivets thus making the bridge easier to paint to lower future maintenance costs.

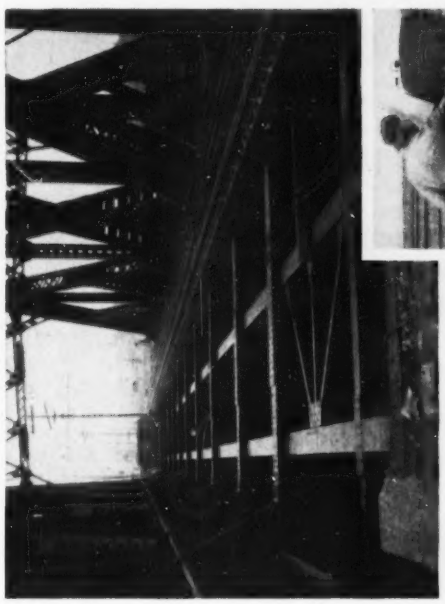

▲ **Fig. 3. Double track right-of-way** *on Shaker Heights Rapid Transit System. Weakened cross braces were replaced in minimum time with arc welding.*

Fig. 4. Lincoln 200 amp "Shield-Arc" ▲ *engine driven welder used for faster, easier replacement of cross braces.*

SIMPLIFIES BRIDGE REPAIRS



Fig. 1. Rusted-out Braces *originally riveted to flanges of bridge girders are cut out quickly with torch.*

CUTS DOWNTIME



Fig. 2. Faster Construction. *Angles sawed to length are fillet welded to web of girder with Lincoln "Fleetweld 5" type electrode.*

SAVES MAINTENANCE

Studies in Structural Arc Welding free on request. Designers and engineers write on your letterhead to Dept. 2302.

THE LINCOLN ELECTRIC COMPANY
CLEVELAND 17, OHIO
THE WORLD'S LARGEST MANUFACTURER OF ARC WELDING EQUIPMENT

THE DRILL DOCTOR *CRUCIBLE HOLLOW DRILL ROD*

teamwork in specialties

The modern, pneumatic rock drill beats out as many as 2000 violent impacts a minute. The man responsible for keeping these drills operating at top efficiency 'round-the-clock is the busy *drill doctor*.

With the high cost of labor and new equipment he knows that to provide good service his drill must be made of the finest steels obtainable. That's why he counts on Crucible.

For Crucible Hollow Drill Rods have demonstrated time and time again their ability to take it . . . to withstand the severest punishment with minimum breakage and bit loss. And Crucible mills are among the few that produce steels that meet the rigid requirements of the rock drill piston — a part that undergoes the toughest service known for steel.

To get the lowest cost per foot per hole in rock drilling, specify Crucible Hollow Drill Rods.



CRUCIBLE first name in special purpose steels

53 years of Fine steelmaking

HOLLOW DRILL RODS

CRUCIBLE STEEL COMPANY OF AMERICA, GENERAL SALES OFFICES, OLIVER BUILDING, PITTSBURGH, PA.

REX HIGH SPEED • TOOL • REZISTAL STAINLESS • ALLOY • MACHINERY • SPECIAL PURPOSE STEELS

OBITUARIES

He was in charge of the first project under the U. S. Reclamation Service, the Truckee-Carson Irrigation Project in Nevada. He was responsible for locating a Hudson River crossing for the Catskill, N. Y., Aqueduct which brought water to New York City. In the 1930's Swift was a consulting engineer for the U. S. Government and covered assignments in Alaska, Greece, Santo Domingo and Costa Rica.

Albert E. Comstock, 77, who retired in 1941 after 40 years as an engineer for the N. Y. City Board of Transportation, died March 5 at Eastview, N. Y. A graduate of Princeton, he saw service in both the Spanish-American war and the first world war.

John Darcy, 58, **Marty Levine,** 42, and **Ed Roach,** 55, all officials of the Northwestern Engineering Co., Rapid City, S. D., were killed in a plane crash March 4 about 40 miles northeast of Rapid City.

J. W. Miller, 73, retired University of Washington civil engineering professor and first chief engineer for the Boeing Airplane Co., died Feb. 26 at Seattle. Graduated in engineering from the University of Nebraska in 1905, he joined the University of Washington faculty in 1909. When the Boeing company was formed during World War II, Miller became its first chief engineer and organized many of the engineering departments. He returned to the University in 1919 and the following year set up his own aircraft-manufacturing company. He re-joined the Washington faculty in 1927 and remained there until 1937.

Oscar E. Strehlow, 80, of Evanston, Ill., civil engineer, president of Walsh and Masterson Inc., foundation contractors in Chicago, died on February 28.

David E. Molin, 64, a construction engineer for Arthur G. McKee & Co. at Belencito, Colombia, was killed there in a railroad accident Feb. 26. For 18 months he had been supervising a section of the construction of a new steel plant. He had been employed by McKee for 23 years and before that was an engineer for the Austin Co.

Cecil W. Kieft, 54, chief engineer of the Middletown, Conn., Public Works Department for the last 18 years, died March 3.

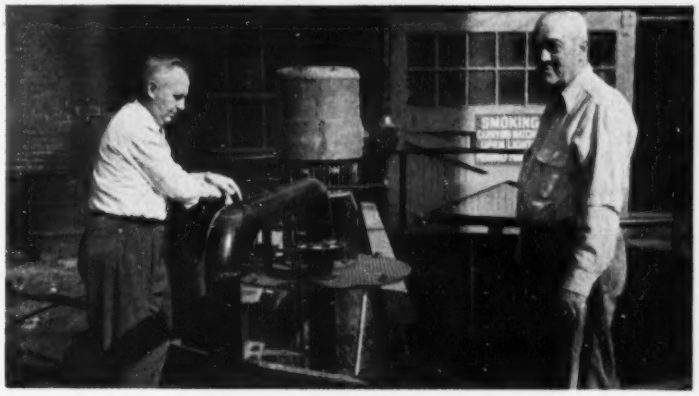

Pumping Hot Tar and Water

At the Delaware Power & Light Co., Wilmington, Delaware, the Deming Vertical Sump Pump, illustrated, is proving its dependable performance.

This unit (Fig. 4620) pumps hot tar and water from a sump through 275 feet of 6" pipe, then up 20 feet into a gas holder tank. The pump is equipped with an explosion proof motor.

Other Deming Pumps used at this plant include four Fig. 4701 "MINUTURB" turbine pumps, two of which are used for pumping condensate from gas mains. For complete information on Deming Pumps write:

THE DEMING COMPANY
536 Broadway • Salem, Ohio

DEMING PUMPS

ERIE *Barge Type* Bucket

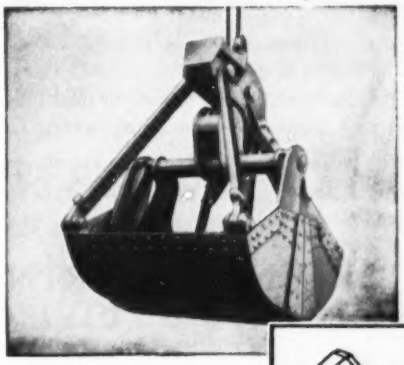

In this type the large deck area achieved means bigger payloads in stock piling and barge rehandling work. Erie's booklet on 2-line buckets gives you complete data on this type and 3 other classes of Erie Buckets. Write for copy today.



Compare DECK AREA

¾ Yd.	27.21 Sq. ft.
1 Yd.	30. Sq. ft.
1¼ Yd.	32.3 Sq. ft.
1½ Yd.	38.7 Sq. ft.
1¾ Yd.	42.4 Sq. ft.
2 Yd.	45.1 Sq. ft.
2¼ Yd.	53.5 Sq. ft.
2½ Yd.	57.6 Sq. ft.
3 Yd.	60.9 Sq. ft.

Write for Catalog 2L-2 *Today*

Dept. R33

ERIE
STEEL CONSTRUCTION COMPANY
1211 GEIST ROAD • ERIE, PENNSYLVANIA

Kent Refinery of Anglo-Iranian Oil Company on the Isle of Grain, below London, will be one of Europe's largest. The crude oil distillation plant and auxiliaries, shown here, have been completed and will be followed by the catalytic cracking unit and the lubricating oil refinery now under construction.

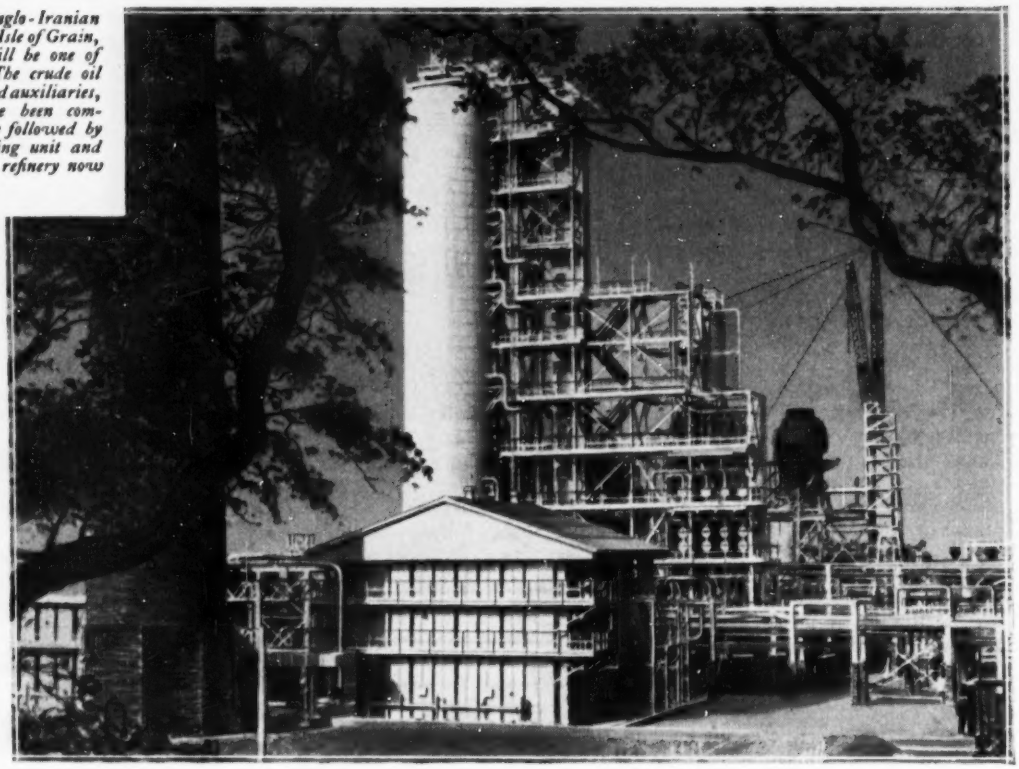

PLACING RESPONSIBILITY *to* BEST ADVANTAGE

Work of the size and complexity of the new Kent Refinery, incorporating the latest technical developments, requires control and leadership woven together detail by detail.

The Anglo-Iranian Oil Company determined products and processes, then placed the design of certain process units and the overall planning and erection management of the complete refinery in the hands of E. B. Badger & Sons Limited, affiliated with Stone & Webster Engineering Corporation.

The coordination of advance planning, scheduling and construction management on a realistic pattern is a sphere in which the organization has long excelled.

STONE & WEBSTER ENGINEERING CORPORATION
BADGER PROCESS DIVISION

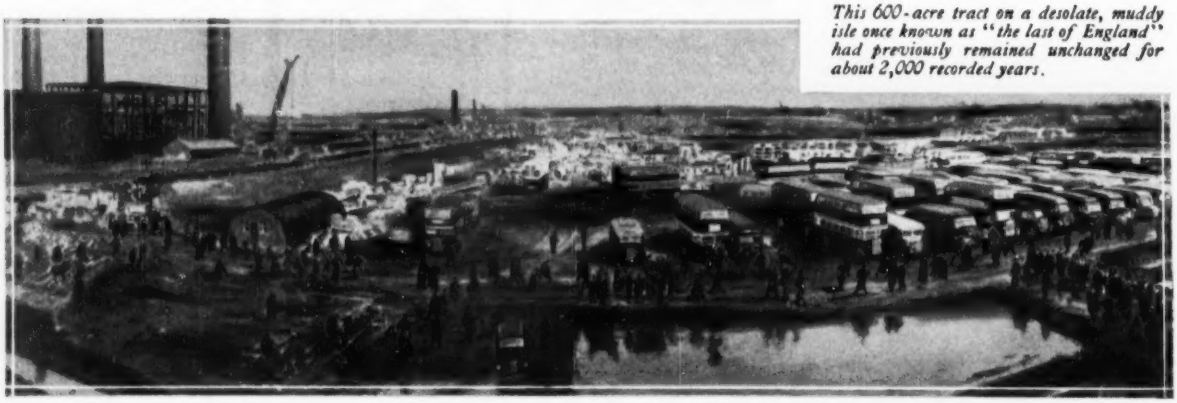

This 600-acre tract on a desolate, muddy isle once known as "the last of England" had previously remained unchanged for about 2,000 recorded years.

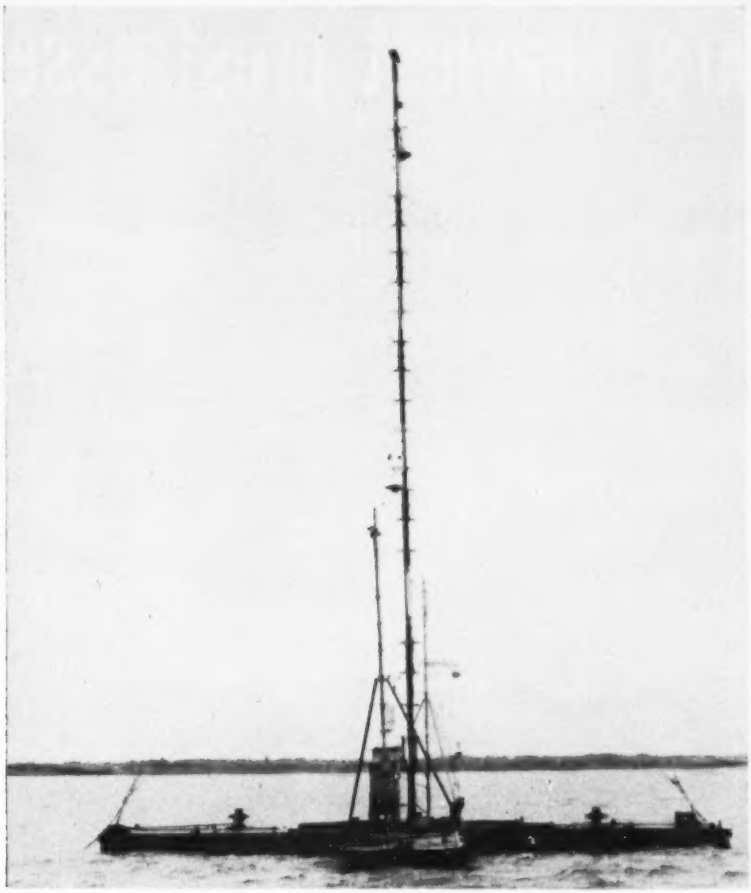

MID-LAKE MOISTURE DETECTOR is alive with devices for measuring and recording factors in evaporation.

Study determines lake evaporation and tests new measurement methods

Water lost through evaporation from the surface of a lake can amount to as much as 9 in. in a month. And if the lake happens to be a large storage reservoir in an area where water is short, this loss can be critical.

These major conclusions have been drawn from a 16-month study completed jointly by researchers of the Navy, Interior and Commerce departments (ENR Feb. 5, p. 28). Climatological and hydrological data were collected at Lake Hefner, near Oklahoma City. Findings are published in a report now available issued by the Navy Electronics Laboratory (NEL Rept. 327) and the Geological Survey (USGS Circular 229, available from the Chief of Distribution, USGS, Washington 25, D. C.).

The researchers chose Lake Hefner as a nearly ideal study case. Its watershed is small; its shores are relatively clear of trees and shrubs. Water entering through a canal can be measured closely; water removed to a filter plant is metered. The lake bottom is compacted clay, nearly impervious to leakage or incoming seepage.

• **Methods of measurement**—In addition to findings on evaporation rates, the study also helped establish relative merits of measuring methods.

The accepted method of measuring loss from a shallow 4-ft round pan, then adjusting it to large bodies of water, was used. And some things were learned about its validity: Study of evaporation from four types of evaporation pans indicated that pan-to-lake relationships (coefficients) show pronounced seasonal variations. These variations, brought about by heat storage in the large mass of the lake, make coefficients developed from short-run tests inapplicable as annual coefficients. Mean annual coefficients are not applicable for a close estimate of evaporation for any particular month.

Two other methods of measurement, which have had theoretic support but little actual test, were given a fair try in the Lake Hefner studies.

First of these gages the "energy budget" of the reservoir. It measures incoming solar radiation, reflected radiation, energy conducted to the water a sheat, and net "advected energy" or that which is carried in or out by flow of water. This leaves as a residual the energy utilized for evaporation; and, of course, energy required for evaporating a given quantity of water is a known physical constant.

Second means tried was the "mass-transfer" method, based on measurements of air and water temperatures, humidity and wind speed. The object here was to find an equation properly relating these factors for practical use.

Throughout the 16-month test, it was found that 62% of the daily evaporation determinations from the pan method checked sufficiently accurately the estimates of evaporation by the mass transfer and energy budget calculations.

• **Findings**—Only two of the many mass transfer equations proved adequate for predicting daily evaporation accurately enough to be generally useful with equipment now available. A simple equation was developed using wind speeds and vapor pressure differences.

The energy budget equation proved satisfactory under certain conditions for figuring evaporation over periods of a week or more. Instrumentation for determining losses by the energy budget method was simplified during the tests. Expensive radiation measuring equipment was supplanted by a Cummings Radiation Integrator—a 48-in. pan 2 ft deep set on insulating concrete and surrounded by 20 in. of rock wool.

Responsible personnel were: R. W. Davenport for the U. S. Geological Survey; J. R. Riter for the Bureau of Reclamation; D. R. Russell for the Navy Electronics Laboratory; G. B. Cummings for the Navy Bureau of Ships; W. E. Hiatt for the Weather Bureau, Department of Commerce.

World's heaviest prestressed

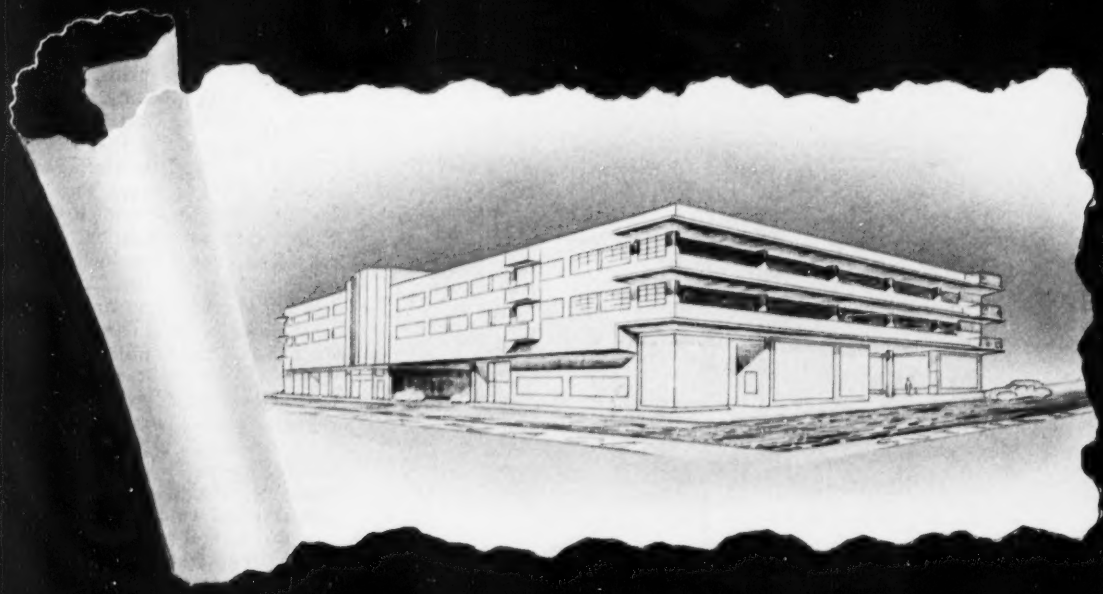

11% savings over structural steel realized with design using Roebling Strand and Fittings

IN THE BARRETT-LICK GARAGE nearing completion in San Francisco, the plans call for a large, unobstructed space in the entrance area . . . and to achieve this, four columns from the upper stories terminate at the second floor and are carried by the heaviest prestressed concrete girders ever constructed. Prestressed concrete was chosen because it allowed adequate headroom without increasing the story height . . . and, incidentally, there was a $6,000 saving (more than 11%) over the cost estimate for an alternative structural steel design.

* * *

To meet the requirements of every prestressed concrete design, Roebling has developed a full line of products . . . Prestressed Concrete Wire and Strand for pre-tensioning . . . Strand and Fittings for post-tensioning.

Roebling Wire and Strand for pre-tensioning are made of high tensile acid steel that results in products of high elastic characteristics. Special treating increases their bonding quality, too.

Roebling Strands for post-tensioning are fabricated from special hot galvanized acid wire, insuring extra strength and elastic properties. At recommended stresses, there is complete safety and no future relaxation of the steel. And Roebling Fittings develop the full strength of the strand without exceeding the yield point of any of their parts. They are attached at the plant and proof-loaded beyond recommended stresses.

Prestressed Concrete is being more and more frequently adopted. Write for the facts and figures on Roebling Prestressing materials. Prestressed Concrete Dept., John A. Roebling's Sons Corporation, Trenton 2, New Jersey.

A Subsidiary of The Colorado Fuel & Iron Corporation

girders for California garage

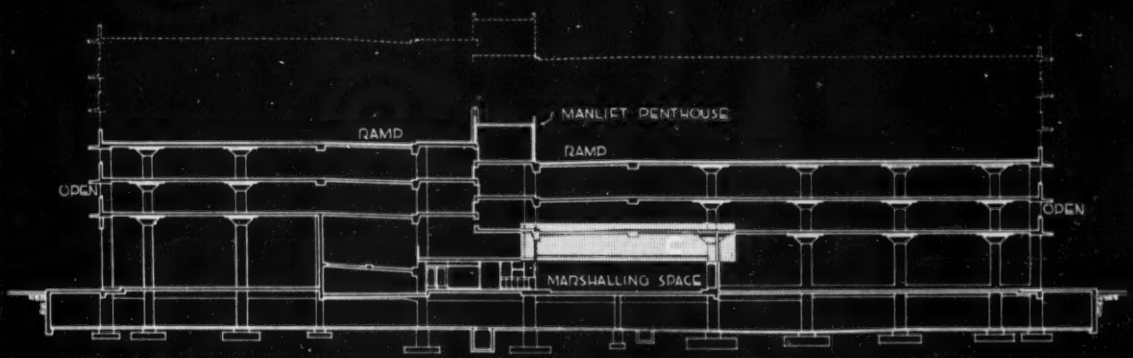

Ellison & King, Engineers • Barrett and Hilp, Contractors

0 10 20 30 40 50FT



SECTION AT GIRDER C

Open, unobstructed entrance area is indicated directly below girder "C". Note that the design includes provision for three additional stories. This section shows haunched slabs used in actual construction.

Plan view of five prestressed concrete girders, showing their arrangement to meet the free area requirements of this ultra-modern garage.

0 5 10 20 30 40 50FT



GIRDER PLAN

ROEBLING

ATLANTA, 934 AVON AVE • BOSTON, 51 SLEEPER ST & 5 PITTSBURGH ST • CHICAGO, 5525 W. ROOSEVELT RD • CINCINNATI, 3253 FREDONIA AVE • CLEVELAND, 13225 LAKEWOOD HEIGHTS BLVD. • DENVER, 4801 JACKSON ST. • DETROIT, 915 FISHER BLDG. • HOUSTON, 6216 NAVIGATION BLVD • LOS ANGELES, 5340 E. HARBOR ST & 120 S. HEWITT ST. • NEW YORK, 19 RECTOR ST. • ODESSA, TEXAS, 1920 E. 2ND ST. • PHILADELPHIA, 230 VINE ST • PITTSBURGH, 1301 CLARK BLDG • ROCHESTER, 1 FLINT ST • SAN FRANCISCO, 1740 17TH ST • SEATTLE, 900 1ST AVE S. • ST. LOUIS, 3001 DELMAR BLVD • TULSA, 321 N. CHEYENNE ST • EXPORT SALES OFFICE, TRENTON 2, NEW JERSEY

CF&I

JR ROEBLING

LOOK
WHAT YOU CAN DO with WELD-CRETE!

For the first time in building history you now successfully can bond new concrete to old, or one pour to another . . . indoors or out, in any weather, at any temperature.

On piers, floors, walls, columns or wherever else you use concrete, you simply brush or spray WELD-CRETE over the old surface (old or new concrete, brick, cinder block, wood, hardboard, metal, glass, etc.) — then in 40 minutes or anytime later, you pour or trowel on your new concrete.

The bond is permanent . . . forever unbreakable . . . stronger than the concrete itself!

Informative bulletins are now available that tell more about this amazing new product — including the names of some of the top-notch engineering and construction outfits who are continuing users of WELD-CRETE. Ask your nearest dealer or write directly to us.

WELD-CRETE

The Ageless Bonding Agent for Concrete

LARSEN PRODUCTS CORP., 4934 ELM STREET, BETHSEDA, MD.

BOOKS

Text on stress and strain

ADVANCED MECHANICS OF MATERIALS—Second Edition, by Fred B. Seely and James O. Smith. 680 pp. John Wiley & Sons, Inc., New York 16, N. Y., and Chapman & Hall, Ltd., London. $8.50.

This is the first revision of this text in 20 years. Since many important contributions have been made to mechanics of materials in the interim, and since students and engineers today are better prepared for study of advanced topics, much new material has been added and the treatment of the subject has been made more penetrating and comprehensive.

The book has been expanded from four to six parts. Also, two new appendixes have been added. The principal objectives of the first edition, however, have been maintained:

1. To review and make more useful the methods and results presented in elementary courses in strength of materials.
2. To show the limitations of the ordinary formulas of strength of materials.
3. To present a more comprehensive view of fundamental concepts and methods used in stress analysis.

The new Part I discusses elementary stress formulas for static loads, stresses and strains at a point and theories of failure by yielding.

Part II covers special topics on the strength and stiffness of members subjected to static loads. It includes determination of the location of shear center, or center of twist, through which loads on a beam must pass to prevent torsion. This subject, which has come into prominence in recent years, is of importance in beams having cross sections composed of thin parts that offer large resistance to bending but small resistance to torsion, such as I-beams, channels and angles. Part II also discusses curved beams, calling attention to the fact that the conventional formula (Winkler-Bach) derived for solid sections, does not hold for I-beams, T-beams or tubular sections. Instead, a method based on the latest available information is given for computing circumferential and radial stresses in such members.

Part III deals with localized stresses and determination of stress concentration factors. Part IV covers energy methods, principally Castigliano's theorem and the dummy-load method. Part V analyzes the influence of small inelastic strains on the load-carrying capacity of structural members and presents an introduction to ultimate-

Highway profiles and grades *– even final cross sections –* from precise AERO maps

Skilled AERO mappers, working with top precision tools like the new Wild Stereoplotter A-7 below, achieve accuracy that is expanding the uses of aerial photo maps.

On a major New England highway project, detailed AERO topographic maps with 1 ft. contour intervals, were used for planning the center line profile and new highway grades.

Even the cross sections for developing bids for earth work were based on AERO contours. Checking by field surveys showed 90% of these contours to be accurate within ½ ft. in open areas.

A hair's breadth is a coarse dimension to this complex, $45,000 mapping instrument—so sensitive it's housed in an air-conditioned room. And in the field, AERO's T-3 theodolites provide precise ground control for aerial maps that put engineering projects years ahead—at a fraction of the cost of ground surveys.

Call on the 34 years experience of our photogrammetric engineers.

AIRBORNE MAGNETOMETER SURVEYS
PRECISE AERIAL MOSAICS
TOPOGRAPHIC MAPS
PLANIMETRIC MAPS
RELIEF MODELS
SHORAN MAPPING

AERO
SERVICE CORPORATION
PHILADELPHIA 20, PENNSYLVANIA
Oldest Flying Corporation in the World

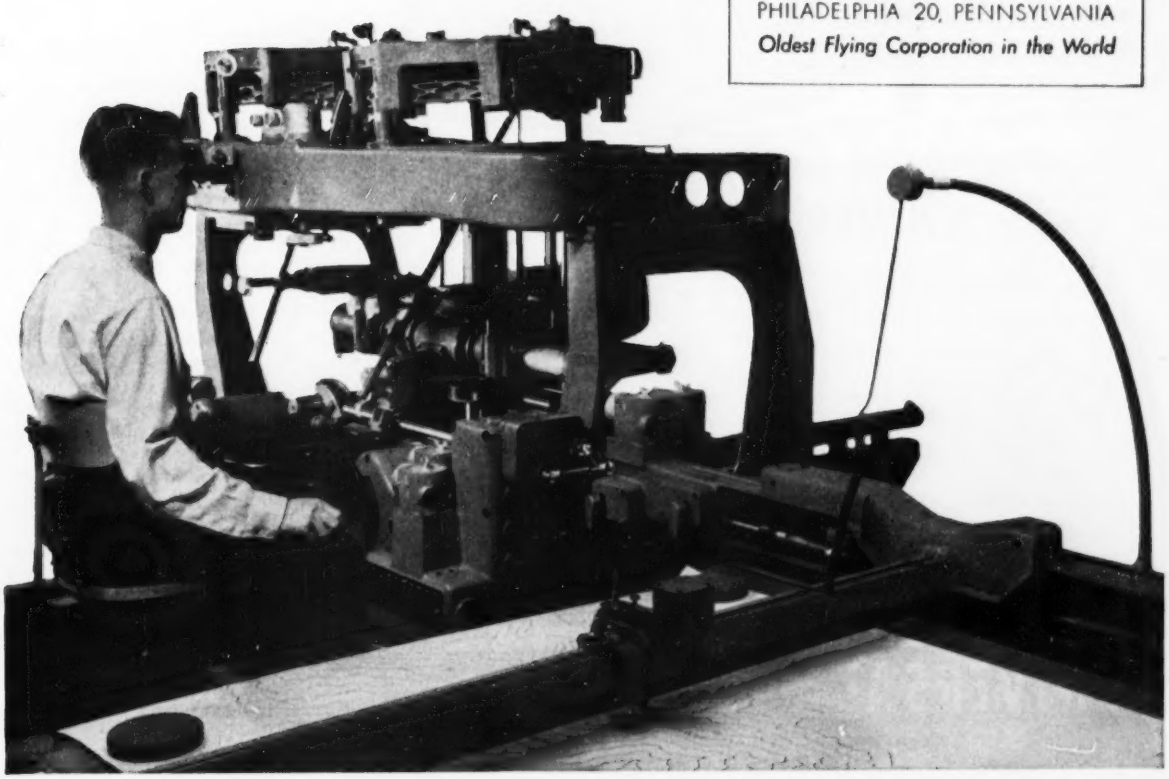

SCAFFOLDING TRICKS

planned the easy way with

UNIVERSAL

Ezebilt



TYING-AROUND CORNERS

Swivel action and diagonal cross-bracing permits the use of braces to "tie-in" when making a 90° turn.



CIRCLING

Ezebilt's swivel action sleeve-lock makes it easy to scaffold round stacks and various cylindrical structures.

Up Faster—no bolts to master with GRAVITY-LOCK

No loose parts—ends of braces with locking triggers are zinc-plated, slip easily into locking sleeves on the panel legs. Finger-tip action releases the rust-proof locking trigger for easy disassembly.



ALL MASON WORK Simplified with Ezebilt SU type panels to provide open passageway thru the lifts. Four plank bearing levels available with use of side brackets.

it's no trick to solve your problem with UNIVERSAL SCAFFOLDING

You can save time and material on difficult and unusual jobs, and simplify your scaffold work with Universal services:

CALL on Universal's layout and planning service to help you build *better* scaffolding *faster*—and at lowest possible cost.

ADAPT standard Ezebilt steel panels to do many other jobs—such as SHORING concrete forms.

COMBINE standard Ezebilt panels with Universal Endlok pipe-and-clamp to scaffold steeples and structures of irregular shape.

PROVIDE work platforms where they're needed—at safe, efficient operating levels.

Universal's NEW Ladscaf — ladder-type scaffold now available. Light-weight, low-cost, it is designed specifically for speeding-up Maintenance, Painting and Decorating work. Write for Bulletin E-3.

UNIVERSAL MANUFACTURING CORP. ZELIENOPLE, PA.

American Tubular Elevating Towers

World's Largest Producer of Steel-Panel Scaffolding.

Distributors offer planning help and fast deliveries from sales and rental stocks—See your phone directory

BOOKS

load analysis. Part VI covers buckling of columns.

One of the new appendixes is an introduction to the mathematical theory of elasticity. The second presents the elastic-membrane (soap-film) analogy for determining torsional stresses.

The book was written primarily for advanced undergraduate and first-year graduate students. But the method of presentation is such that structural designers and research engineers will find it a useful reference.

Why metals crack

FATIGUE AND FRACTURE OF METALS—Edited by William M. Murray. 313 pp. The Technology Press, Massachusetts Institute of Technology, Cambridge, Mass.; John Wiley & Sons, 440 Fourth Ave., New York 16, N. Y. $6.

A great deal has been learned in the last 25 years about the nature of fatigue failures in metals. This information is summarized by various authorities in the 14 papers forming this book. The papers were originally presented in a conference on fatigue and facture of metals which was held at Massachusetts Institute of Technology in June, 1950.

To some engineers who read the book, it may be disappointing to learn that no method is available at present for assessing the exact state of fatigue damage in a structure, and predicting failure. There is no way of knowing whether a 20-year old bridge hanger can take one more truck load, or a building beam one more day of machine vibration. Also, some designers may feel frustrated on finding that they cannot design a structure economically with absolute certainty that no failure will take place; or realizing that they have to think in terms of odds of, say, 10 to 1 that no failure will occur in 20 years.

But the situation is far from discouraging. Today, the nature and mechanism of brittle fracture in normally ductile metals is better understood than most other fracture phenomena. This is brought out in the book in several papers.

Several intriguing suggestions for avoiding fatigue failures are advanced in addition to the obvious ones of minimizing notch effects and using special steels with high energy-absorption and notch toughness. One, suggested by O. J. Horger and H. R. Neifert, is to introduce favorable internal stresses into members by either cold-working or thermal processes. Another is to incorporate riveted crack arresters, as has been done for all-welded tankers.

MUELLER®

INSERTING VALVES AND EQUIPMENT

for inserting control valves where a shutdown is impractical

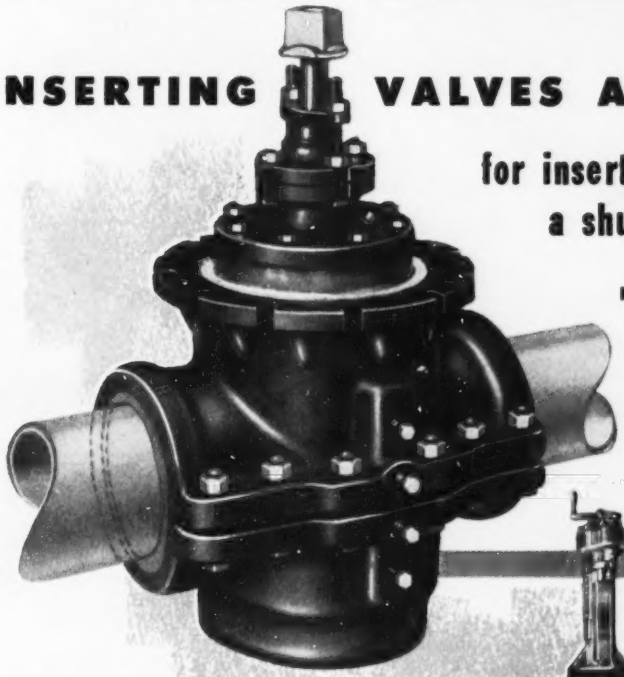

H-800 INSERTING VALVE

New smaller valve sleeve permits fast, easy installation in minimum space. Valve mechanism is the same as standard Mueller gate valve (repair parts interchangeable). Sizes 4", 6", and 8" (sizes of valves correspond to size of main).

DRILLING MACHINE

The C-C hand-operated or C-1 power-operated machine may be used for both drilling the main and inserting the valve plug. The C-1 machine may be operated either by the H-600 Air Motor or the new H-602 Gasoline Engine Drive Unit.

This new portable unit may be used to power the C-1 drilling machine. Compact and easily handled, this power unit can be used on many jobs. Its' ten-foot flexible drive shaft allows unrestricted movement. Remote control throttle permits full control of power at drilling machine.

H-810 BASIC INSERTING EQUIPMENT

An assembly of pressure confining units plus a slide valve. Permits the drilling of the main and inserting of the valve plug, easily and safely, with no water loss.

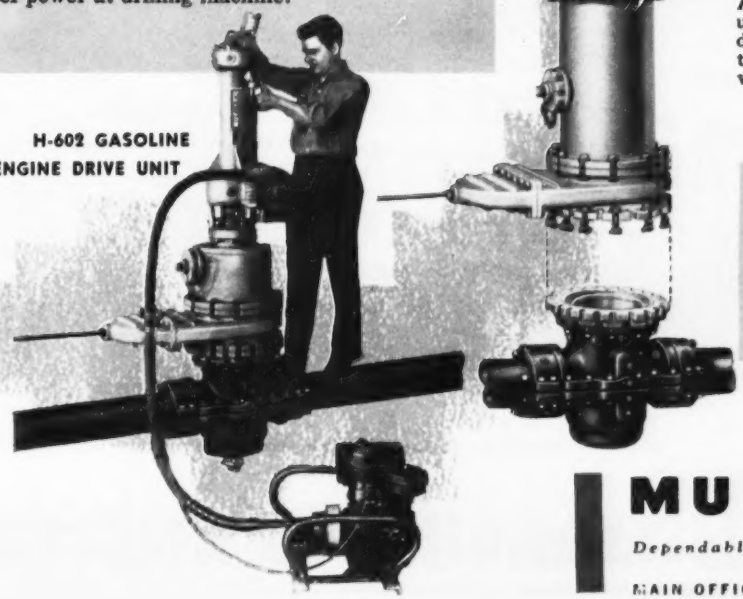

H-602 GASOLINE ENGINE DRIVE UNIT

Write for Catalog H-30 and H-602. Complete illustrated instruction manuals and parts list shipped with equipment.

MUELLER CO.

Dependable Since 1857

MAIN OFFICE & FACTORY DECATUR, ILLINOIS

Transite Pipe is a product of modern engineering and research. Shown above is one of the buildings at the Johns-Manville Research Center at Manville, New Jersey.

*Transite is a registered Johns-Manville trade mark

Johns-Manville TRANSITE

TRANSITE PIPE last longer California city streets? ➧

Transite Pipe was first installed by this California city nearly 20 years ago. Its lasting strength and high corrosion resistance have enabled it to outlast pipe previously used several times over.

Research designed it for lasting strength

TODAY, ACROSS THE COUNTRY—under countless city streets like the one shown above—Transite* Pressure Pipe is doing a highly efficient job of transporting water . . . often under conditions so adverse to ordinary pipe that engineers marvel at Transite's ability to stand up through the years!

The reason? *Lasting strength!*

Not only does Transite Pipe have the *initial* strength that's needed in a pipe intended for use under busy city streets. Equally important, it has the *lasting* strength that enables it to survive continued corrosive attack, year after year . . . to keep on giving the same dependable, economical service to the community as the day it was installed.

This highly important quality of lasting strength is one of many notable inherent advantages of a pipe engineered with modern water transportation requirements in mind. Transite's Simplex Couplings reduce leakage losses to a minimum, provide flexibility to help relieve the line of soil stresses and traffic loads. Its light weight makes for easier handling and effects substantial savings during installation. Its smooth interior assures a high coefficient of flow (C=140) and, because Transite can never tuberculate, helps keep pumping costs low through the years.

Why not get all the details . . . find out how this modern-engineered-for-the-job asbestos-cement pipe can help solve your water-line problems and *save you money?* For full information, write Johns-Manville, Box 60, New York 16, N. Y.

JOHNS-MANVILLE JM PRODUCTS



Tough, strong asbestos fibers reinforce Transite Pipe—contribute to its high corrosion resistance and lasting strength.



On machines like this, the asbestos-cement-silica mixture is "built up" under heavy pressure into a dense, homogeneous pipe structure.

Transite's flexible Simplex Couplings help relieve the line of excessive flexural stresses—an added safeguard against pipe failures.

asbestos-cement PRESSURE PIPE

DISCHARGE IS FAST OR SLOW,
depending on how you want it. Hydraulic controls make this possible. Mid-section pivot of loader arms give longer reach in dumping position.

STRIPPING TOP SOIL
is another job this versatile unit does well. The simple rugged design of the Ware loader correctly distributes weight on tractor frame, regardless of the operation being performed. Down-pressure can be applied when it is necessary in tough digging. Hydraulic rams absorb shock loads . . . mean longer life and lower maintenance for both tractor and loader.

HYDRAULICALLY CONTROLLED BUCKET
assures greater "breaking-out" action—full bucket loads every time. 28° roll back helps prevent wasteful spillage.

Picture Your Profits...

with this

OLIVER HYDRAULIC Tractor-Loader

An Oliver Industrial Wheel Tractor with this *all-hydraulic* front-end loader is a combination that's hard to beat for low-cost, profitable operation. With any Oliver Wheel Tractor, you get famous Oliver *dependable* plus power, easy maneuverability, rugged construction. With the loader, manufactured exclusively for Oliver Wheel Tractors by Ware Machine Works, you get completely hydraulic operation which means easier, surer control for more efficient digging and loading.

Take a look at the "profit pictures" shown here. They'll convince you that it's well worthwhile to ask your Oliver Industrial Distributor to arrange a demonstration of an Oliver tractor-loader combination for you.

THE OLIVER CORPORATION

400 West Madison Street, Chicago 6, Illinois

A complete line of industrial wheel and crawler tractors

CONSTRUCTION REPORTS

Bids Asked—Low Bidders—Contracts Awarded—First Section

Compiled by Business News Department—Engineering News-Record, 330 W. 42nd St., New York 36, N. Y
ELSIE EAVES, Manager *J. A. MAHONEY, Reports* *M. R. ROESSLER, Statistics*

NEW ENGLAND

BIDS ASKED—HEAVY CONSTRUCTION

† **Connecticut**—B.A. 3/23—First Coast Guard District, 447 Commercial St., Boston, Mass., furnish, place rip rap, repair sea wall, Light Station, Watch Hill.

BIDS ASKED—BUILDINGS

Conn., Weston—SCHOOL—B.A. 3/25—Town School Bldg. Comn., Town Hall, school, south of present Junior High School. Plans deposit $35. E. F. O'Dwyer, 58 E. State St., Westport, archt. CD 9/8.

Mass., Brighton—GYMNASIUM, etc.—B.A. 3/26—Curtin & Riles, archts., 45 Newbury St., Boston, Mass., gymnasium and alterations, for St. Elizabeth's Hospital, 736 Cambridge St., Brighton, Mass. $300,000. Plans deposit $25. Former contract rescinded. CD 6/10/52, under CA.

Mass., Wilmington—SCHOOL—B.A. 3/27—Town, Supt. Schools, 159 Church St., elementary school, Wildwood St. $546,000. Plans deposit $50. Thomas Hixon Co., 1150 Commonwealth Ave., Allston, archt. CD 2/3.

SOON LETS CONTRACT—BUILDING

Me., Portland—WAREHOUSE—Burnham & Morrill Co., 45 Water St., soon lets contract 1 story, 20 ft. high, 40,000 sq. ft. brick, block warehouse addn. $200,000. Philip P. Snow, 477 Congress St., Portland, Me., engr. CD 8/18/52.

▲ **Mass., Roxbury**—FOOD TERMINAL—Massachusetts Wholesale Food Terminal, Inc., c/o Thomas Worcester Inc., archt., 85 State St., Boston, soon lets contract rein.-con. wholesale food terminal, 30 N. Central St. $2,500,000.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

† **U. S. Eng.**, 857 Commonwealth Ave., Boston, Mass., cancelled bids to have been opened Apr. 2, sewage treatment plant, Limestone Air Force Base, Eng-19-016-53-88, LIMESTONE, ME. Under $1,000,000. Project indefinitely postponed. CD 2-27.

▲ **R. Zoppo Co.**, 842 Boston St., Providence Hy., Norwood, Mass., CA, $1,291,000. Contract 31, Northeast Trunk Water Main, Birnie Ave., SPRINGFIELD, MASS. City, Water Dpt., City Hall, Springfield, Mass. Bids Feb. 9. CD 2/13, under LB.

† **Jefferson Constr. Co.**, 75 1 St., Cambridge, Mass., LB, $663,000, Est. Approx. $660,000, rehabilitate and addns. to structures Auxiliary Landing Field, Spec. 34833, South Weymouth, WEYMOUTH, MASS. First Naval District, 495 Summer St., Boston, Mass. Bids Mar. 3. CD 2/9.

BUILDINGS

LOW BIDS AND CONTRACTS

Brown Constr. Co., 562 Congress St., Portland, Me., LB, $527,515. High SCHOOL, Gorham Rd., SCARBOROUGH, ME. Town, School Bldg. Comn., Supt. Schools, Scarborough, Me. Bids Mar. 4. CD 2/25.

Construction Units, Inc., 199 Washington St., Boston, Mass., LB, $935,504, est. $800,000. Elementary SCHOOL addns., imprvs., Edward Devotion School, 345 Harvard St., BROOKLINE, MASS. Town Bldg. Comn., Town Hall, Brookline, Mass. Bids Mar. 5. CD 2/9.

Carlson Constr. Corp., 555 Mt. Auburn St., Watertown, Mass., CA, $575,693, est. $500,000 Contr. 114, BUILDING, State Pier Central St. and Water St., FALL RIVER, MASS. Commonwealth of Mass., Dpt. P. Wks., 100 Nashua St., Boston, Mass. Bids Dec. 23. CD 12/30, under LB.

▲ **Rich Bros. Constr. Co.**, 410 Park Square Bldg., Boston, Mass., LB, $1,173,439, est. $1,500,000. High SCHOOL, Main St. and Chikering Rd., NORTH ANDOVER, MASS. Town High School Bldg. Comn., 120 Main St., North Andover, Mass., Bids Feb. 26. CD 1/15.

▲ **Gilbane Building Co.**, 90 Calverly St., Providence, R. I., CA, $1,254,000, Oak St. SCHOOL and West Side SCHOOL, TAUNTON, MASS. City, Supt. Schools, H. H. Gallivan, Cohannet School, Taunton, Mass. Bids Feb. 25. CD 3/3, under LB.

A. F. Peaslee, Inc., 15 Lewis St., Hartford, Conn., CA, $615,279, Consolidated Elementary SCHOOL, adjoining Centerbrook School, ESSEX, CONN. Town Consolidated Elementary School Comr., Municipal Bldg., Essex, Conn. Bids Feb. 20, awarded Mar. 2, CD 3/4, under LB.

Wadhams & May Co., 15 Lewis St., Hartford, Conn., LB, $889,140, Elementary SCHOOL, Vernon & Lydall Sts., MANCHESTER, CONN. Town, Municipal Bldg., 41 Center St., Manchester, Conn. Bids Mar. 4. CD 2/16.

Moraco Constr. Co., Inc., 104 Reservoir Ave., Bridgeport, Conn., LB, $516,000, elementary SCHOOL Second Hill Lane Area, STRATFORD, CONN. Town Bd. Educ., N. Parade St., Stratford, Conn. Bids Feb. 26. CD 2/10.

MIDDLE ATLANTIC

BIDS ASKED—HEAVY CONSTRUCTION

† **N. Y., Cortland**—B.A. 4/1—Fish & Wildlife Service, Dpt. Interior, 59 Temple Pl., Boston 11, Mass., macad. road at U. S. Fish Cultural Station, Inv. No. FWS-1884.

BIDS ASKED—BUILDINGS

N. J., Newark—HOUSING—B.A. 3/24—Housing Auth. of City of Newark, 57 Sussex Ave., Housing Project N.J. 2-13, administration bldg. and 4 bldgs. for 778 families. Plans deposit $50. CD 2/18, under LB.

▲ **N. J., Trenton**—ADMINISTRATION—B.A. 4/8—N. J. State Building Auth., State House, Trenton, administration bldg. for State Dpt. Educ., on campus of State Teachers College at Hillswood Lakes. $1,500,000. Plan deposit $100. Lewis C. Licht, 19 Knickerbocker Rd., Englewood, archt. CD 1/16.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ **NEW YORK**—State Dpt. P. Wks., State Office Bldg., Albany,

DeLillo Constr. Co. Inc., 71-15 51 Ave., Woodside, L. I., N. Y. LB $1,022,300, est. $1,307,000, elimination grade crossing of Chemung and Sayre Sts., with Penn. R. R. Horseheads-Corning, S.H. 358, Horseheads Village, S.H. 5162, Horseheads Village East Corning-Horseheads Pt. 2, 3.22 mi. PSC. 5987, FASH 53-5. FASH 53-6, FARC. 53-16, Chemung Co. Bids Mar. 5. CD 2/11.

▲ **NEW YORK**—State Dpt. P. Wks., State Office Bldg., Albany,

The Lane Constr. Corp., 37 Colony St., Meriden, Conn., LB $1,703,617, est. $1,923,000, New York State Thruway-Catskill Sect, Sub. 3A and 4 (Delaware Ave.-Normanskill); Southern Blvd. Interchange; Frisbie Ave. Ext.; McCarthy Ave.; Marginal Rd. "J", Thy. 2.2 mi., Acc. 1.65 mi. C. T. 53-4, C. T. 53-3P, S.T.C. 53-9, S. T. 53-10, Albany Co;

Kelleher Corp., Turners Falls, Mass., LB $475,163, est. $500,000, 4.65 mi. Harriscena-Fort Ann, Pt. 1, 2A and 2B, Fas. SH 53-8. Warren and Washington Counties;

Serafini Constr. Co., Inc., Conklin Rd., Binghamton, N. Y., LB $1,930,329, est. $2,035,000, 4.18 mi. Rochester City-Mt. Read Blvd., FAC 50-5; Mt. Read Blvd.-Lake Ontario State Parkway, Pt. 1, FASH 50-4. FAC. 53-3P, FASH 53-4P, Monroe Co.; LB $1,337,870, est. $1,648,000, 2.67 mi. Binghamton-Windsor, Pt. 2, S.H. 5022, FARC. 53-18, Broome Co.;

Dan-Bar Contg. Co., Inc. & W. E. O'Neil Constr. Co., 220 Pulawski St., Syracuse 4, N. Y., LB $1,237,523, est. $1,394,000, 2.7 mi. New York State Thruway-Ontario Sect. Sub. 8A (Mattydale Interchange), O. T. 53-2, Onondaga Co.;

Zara Contg. Co., Inc., Engel St., Hicksville, L.I., N. Y. LB $927,125, est. $1,059,000, 2.53 mi. Maywood-Babylon, SH 1841, Maywood-Babylon, Pt. 2, Babylon Village, SH 5299, FARC 53-4. FASH 53-2, Suffolk Co.;

John A. Borio, Inc., W. Cedar St., Poughkeepsie, N. Y. LB $2,624,038, est. $3,374,000, Palisades Interstate Park-Goshen, Pt. 3, (Chester-Goshen); Chester-Florida, S.H. 1809; Chester-Goshen S.H. 156; Goshen Village; S. Church, W. Main Sts. and Greenwich Ave., S.H. 1329 and 4 access roads, 4.59 Hy., 1.64 Acc. mi. FASH 53-7. FARC 53-17, Orange Co.;

Arcole Midwest Corp., 3225 Main St., Evanston, Ill., LB $4,425,394, est. $5,227,000, New York State Thruway-Mohawk Sect. Subs. 1 and 2 (Gordon Rd.-Albany Co. line); Co. Rd. 32R; Co. Rd. 26R; Co. Rd. 24R; Mariaville Rd. Conn.; Co. Rd. 9R; Co. Rd. 7R; South Schenectady-Mariaville, SH 788; Schenectady-Duanesburg, Pt. 1, SH 880; Schenectady-Guilderland S.H. 577, Thy. 6.542 acc. 3.432 mi. M.T. 53-3, S.T. 53-7, R.C. 53-19, Albany and Schenectady Counties;

Victor C. Arzani Contg. Co., 2507 James St., Syracuse 6, N. Y., LB $493,657, est. $496,000, separation of grades Oswego City, State Road and N.Y.O. & W. R.R., Oswego City; State Rd.; Oswego-Mexico Pt. 1, SH 509, 1.37 mi. FAGC, 53-4, FAC 53-5, FARC. 53-14, Oswego Co.;

Jess F. Howes, Sidney Center, N. Y., LB $499,557, est. $550,000, 3.58 mi. Cadosia-Granton, FASSH. 53-3, Delaware Co.;

B. Perini & Sons, Inc., 73 Montwait Ave., Framingham, Mass. LB $7,948,186, est. $9,481,000, New York State Thruway-Mohawk Sect. Sub. 12D and 13A Fort Plain-Randall); Canajoharie Interchange; 5 access drives; Fort Plain-Canajoharie, Canajoharie-Fultonville, Pt. 1, S.H. 8348, Canajoharie-Fultonville, Pt. 2, SH 8371. 10.4 mi. Thy., 3.33 mi. Acc., M.T. 53-4, S.T. 53-8, R. C. 53-21, Montgomery Co.; Bids Mar. 5. CD 2/11.

Edward Acker Corp. and South Shore Contg. & Dredging Corp., 100 West Ave., Paltchoque, N. Y., LB $377,566, est. $552,050, Moriches Inlet (West Side), B.P. 53-50, Suffolk Co., NEW YORK. State Dpt. P. Wks., State Office Bldg., Albany, N. Y. Bids Mar. 5. CD 2/18.

Comrs. South Huntington Municipal Water Dist., Huntington Station, N. Y., rejected bids Mar. 10, South Huntington WW admin. bldg. and garage addn. HUNTINGTON STATION, N. Y. CD 2/12.

Tully & Di Napoli, Inc., 127-50 Northern Blvd., Flushing, N. Y., LB. $376,998, Contr. 1002-2T-14 trunk sewer line from Garden City to Herricks MINEOLA, N. Y. Bd. Supervs. Nassau Co., Old County Court House, Franklin Ave., Mineola, N. Y. Bids Feb. 26. CD 2/18.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **John Kinner & Assoc., Park Ave., Corning, N. Y.**, CA $1,429,340 Junior-Senior High SCHOOL and bus GARAGE, BATH, N. Y. Bd. Educ., Central School Dist. No. 2 of Towns of Bath, Cameron, Wheeler, Urbana, Thurston, Avoca and Howard, High School Bldg., Bath, N. Y. Bids Feb. 3, awarded Feb. 16. CD 2/17, under LB.

C. Rolland Oswald, 21 John St., Schenectady, N. Y., LB, $788,576. 1 story, brick, steel elementary SCHOOL, COLONIE, N. Y. North Colonie Central School Dist., Lathams, N. Y. Dodge W. Parker & Assoc., 109 State St., Albany, N. Y., archts.

▲ **William E. Bouley Co. Inc.**, 33 William St., Auburn, N. Y. CA. $3,913,837, Community War MEMORIAL, ROCHESTER, N. Y. Div. Purchase & Supply, 37 City Hall, Rochester, N. Y. Bids Jan. 6, awarded Jan. 29. CD 11/18.

▲† **Blake Constr. Co.**, 33 "E" St. S.W. and **D. B. Lyons**, 1254 23 St. N.W., Wash., D. C., LB $1,414,000, Base Bid 1-2-3. PLANT and Science laboratory Eng. 49-080-53-9 (9); soil preparation bldg., Eng. 49-080-53-10 (10); classified bldgs., Eng. 49-080-53-66 (58) CAMP DETRICK, MD. U. S. Eng., First and Douglas Sts. N.W., Wash., 25, D. C. Bids Mar. 5. CD 2/9

Kirby & McGuire, Inc., 2518 Greenmount Ave., Baltimore, Md., LB. $689,540, Berkshire Elementary SCHOOL, TOWSON, MD., Baltimore Co. Bd. Educ., Aigburth Rd., Towson, Md. Bids Feb. 25. CD 2/9.

† **F. H. Martell Inc.**, 1023 20 St. N.W., Wash., D. C., LB. $978,200, Alternate A, add $4,600; Alternate B, add $7,000. LAW SCHOOL, Howard University, 6 St. and Howard Pl. N.W., WASH, D. C. General Services Admin. P. Bldg. Services, General Services Bldg., 19 and F Sts. N.W., Wash., 25, D. C. Bids Mar. 5. CD 2/6.

SOUTH

BIDS ASKED—HEAVY CONSTRUCTION

Ky., Mayfield—B.A. 3/25—City, Scott Lemon, mayor, sewage treatment plant, sanitary sewers, 2 sewage lift stations and appurtenances, 35,657 lin. ft. 8 in. vitr. clay pipe. Plans deposit $20. Russell, Axon & Assocs. 408 Olive St., St. Louis, 2, Mo., engrs. CD 1/29.

PROJECTS COVERED

Projects—By Size

Construction projects here reported cover the United States and Canada, are of these minimum sizes or larger: water supply, earthwork, waterways $34,000; other public works $60,000; industrial buildings $82,000; other buildings $300,000.

Classes of Construction
(Name in order of Listing)

Water Supply	Latin America
Sewers, Waste Disposal	Public Buildings
Bridges	Commercial Buildings
Streets & Roads	Industrial Buildings
Earthwork, Waterways	Unclassified

Stages Reported

PROPOSED WORK: Including appointment of engineers or architects.

BIDS ASKED (new announcements only). For full calendar, see also preceding issues of ENR.

LOW BIDDERS: On jobs below $500,000 value all low bidder news will be the final reports published on the projects involved except where award is not made to the low bidder. In this case, a supplementary contract award report will be published.

CONTRACTS AWARDED: Except awards to low bidders previously reported in low bidder stage.

Dates shown are of issue in which last previous report was published.

Symbols and Abbreviations Include:

†	Federal Government
▲	Project of $1,000,000 or over.
B.A.	Bids Asked
ENR	Engineering News-Record
CD	Engineering News-Record Construction Daily

DIFFICULT FOUNDATION WORK

- FOUNDATIONS
- CAISSONS
- UNDERPINNING
- SHEETING & BRACING
- PILING & SHEETING
- SHORING
- COFFERDAMS
- MOVING STRUCTURES
- SPECIAL SERVICES

Write for revised catalog.

PILING AND SHEET PILING

The importance of adequate piling or sheeting of steel, concrete or wood to meet a given condition calls for special skill.

No matter what the problem in piling or sheet piling, Spencer, White & Prentis engineers can provide a safe economical solution, drawing upon their years of study and experience.

Consult with us on these problems without obligation.

SPENCER, WHITE & PRENTIS, INC.

10 East 40th Street, New York 16 • Hammond Bldg., Detroit, Mich.

In Canada

Spencer, White & Prentis of Canada, Ltd.

700 Bay St. Toronto, Ontario | 209 Park Bldg. Windsor, Ontario | 2052 St. Catherine's St., W. Montreal, Quebec

construction

STEEL

Some products in short supply but we'll do our best to help you

REINFORCING BARS and accessories
STRUCTURALS—channels, angles, beams, etc.
PLATES—sheared and U. M., Inland 4-Way Floor Plate
SHEETS—many types & coatings
TUBING—incl. welded structural
EXPANDED METAL—std. & flattened
STEEL SPIRALS, CAISSON RINGS, ETC.

RYERSON

Joseph T. Ryerson & Son, Inc.
Plants at: New York, Boston, Philadelphia, Detroit, Cincinnati, Cleveland, Pittsburgh, Buffalo, Chicago, Milwaukee, St. Louis, Los Angeles, San Francisco, Seattle, Spokane

FIRST MAJOR IMPROVEMENTS IN

50 YEARS

Compare the Brunson to any instrument you know. Brunson alone offers you all these advancements . . . the first major surveying instrument improvements during the past 50 years.

- Ball-Bearing Spindle Base
- Ball-Bearing Telescope Axis
- Permanently Lubricated Sealed Dustproof Bearings
- Tangent Adjustment Wobble Pin
- Completely Enclosed Leveling Screws

Precision surveying instruments
Transits, Levels, Rods, Tripods.

LASTING BRUNSON ACCURACY

BRUNSON INSTRUMENT COMPANY, INC.
1405 Walnut St. • Kansas City 6, Mo.

† **Louisiana**—B.A. 3/25—U. S. Eng., foot of Prytania St., New Orleans, approx. 375,000 cu. yd levee embankment, Type 2 fill and 5,120 lin. ft. gravel surf. hy. on East Atchafalaya River Levees, Inv. No. 53-171, Point Coupee Parish. CD 6/26/46.

La., Monroe—DORMITORIES—B.A. 3/26—Officer in Charge of Construction, Eighth Naval Dist., U. S. Naval Station, 600 South St., New Orleans, airmen's dormitories, incl. 11 wood 2 story bldgs., 37x224 ft. incl. grading, gravel walks, drives, etc. Selman Air Force Base, Spec. 36785. Plans deposit $50. CD 12/4.

† **S. C., Charleston**—PORCHES and TILE SHOWERS—B.A. 3/31—Dpt. Navy, Officer in Charge of Construction, Bldg. 12, U. S. Naval Base, Charleston, concrete porches and tile showers on Bldgs. 1162, 1163, 1164, 1165, 1144, 1160, 1161, 1186 and 1188, NOY 77334. Plans deposit $10. CD 6/25.

BIDS ASKED—BUILDINGS

Ga., Macon—SCHOOL—B.A. 3/24—Bibb Co. Bd. Educ., Court House, Macon, Hightower Road School. $325,000. CD 1/22/48.

La., New Orleans—SCHOOL, etc.—B.A. 4/1—Frances Z. Cabrini School, c/o Curtis & Davis, archts., 822 Perdido St., parochial school and rectory. $300,000.

† **Ga., Albany**—CAFETERIA—B.A. 4/2—Dpt. Navy, Officer in Charge of Constr., Box 365, Naval Base, S. C., civilian cafeteria, Marine Corps Depot of Supplies, Spec. 37001. CD 2/5/51.

Ga., Atlanta—WAREHOUSE—B.A. 4/2—Peaslee-Gaulbert Corp., Whitehall St. S.W., warehouse addn. $150,000. Plans deposit $25. Abreu & Robeson, Inc., 141 Walton St. N.W., archt.

† **Ky., Richmond**—STORAGE BINS—B.A. 4/2—U. S. Eng., 830 W. Broadway, Louisville, Ky., storage bins for popping plant, Blue Grass Ordnance Depot, Serial No. ENG 15-029-53-61.

▲ **Tenn., Nashville**—HIGH SCHOOL—B.A. 4/2—Davidson Co. Bd. Educ., Court House, rebuild Hillsboro High School. $1,055,000. Plans deposit $300. Edwin A. Keeble, Cotton States Bldg., archt. CD 1/28.

† **Ky., Richmond**—BUILDING REMODELING—B.A. 4/7—U. S. Eng., 830 W. Broadway, Louisville, remodeling Bldg. No. 214, Blue Grass Ordnance Depot, Serial No. ENG 15-029-53-42.

Va., Luray—PLANT—B.A. 4/15—Blue Bell, Inc., Jefferson Bldg., Greensboro, N. C., plant. $500,000. Stainbeck & Scribner, 112 3rd St. N. E., Charlottesville, archts. CD 3/2.

SOON LETS CONTRACT—BUILDINGS

Ga., Columbus—VEHICLE GARAGE—Wells Dairies, c/o E. Oren Smith, archt., 1236 Wildwood Ave., soon lets contract, vehicle garage, $100,000. CD 3/6.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

NORTH CAROLINA—State Hy. & P. Wks. Comn., Raleigh,
Bituminous Concrete Constr. Co., Inc., Whitmire, S. C. CA. $512,313, est. $400,000-$500,000, grading, stabil. aggregate base, bit. surf. tr. and structures 14.11 mi. Hy. Proj. 4862, Wake and Franklin Counties. Bids Feb. 24, awarded Mar. 4. CD 2/27, under LB.
Comrs. Abbeville Co., Abbeville, S. C. Owner Builds. $64,000, imprv. county roads, ABBEVILLE, S. C.
Herman-Sipe & Co, Hickory, N. C. CA. $83,045, swimming pool, HICKORY, N. C. City, Hickory, N. C. Bids Mar. 2.
L. A. Tvedt, 10 N Main Bldg., Memphis, Tenn., LB. $517,486, power and sluice tunnels, Buford Dam on Chattahoochee River, Buford, Inv. 53-53, GEORGIA. U. S. Eng., P.O. Box 1169, Mobile, 7, Ala. Bids Mar. 3. CD 2/3.
Georgia Dpt. State Parks, State Capitol, Atlanta, Ga., rejected bids Feb. 9, swimming pool and bath house Georgia Veterans Memorial State Park, CORDELE, GA. (Correction-status). CD 2/13, under CA.
† **Wright Contg. Co.**, 504 25 Ave., Columbus, Ga. LB. $122,336, calibration yard, Hunter Air Force Base, Inv. 53-49, SAVANNAH, GA. U. S. Eng., 200 E. St. Julian St., Savannah, Ga. Bids Feb. 26.
Lofera Contg. Co., 601 N.W. 20 Ave., Miami, Fla., LB. $127,272, sidewalk improvements in Districts SK-124 and SK-137, MIAMI, FLA. City, Div. Eng., 3332 Dinner Key Dr., Miami, Fla. Bids Mar. 4. CD 2/26.
▲ **MISSISSIPPI**—State Hy. Comn., State Office Bldg., Jaskson,
Texas Constr. Co., 1909 N. Harwood St., Dallas, Tex. CA. $1,304,314, bridge over West Pascagoula River; CA $2,614,852, bridge over East Pascogoula River, Jackson Co.;
Johncke Services, Inc., 814 Howard Ave., New Orleans, La. CA $2,039,650, roadway more than 3 mi. between the bridges, Jackson Co. Bids Feb. 24. CD 2/27, under LB.
▲ **Mills & Jones, Inc.**, 2260 4 Ave. S., St. Petersburg, Fla., LB. $859,219, structural work;
Silvis Co., 1128 Geele Ave., Sheboygan, Wis., LB. $1,185,995, mechanical work;
Burford, Hall & Smith, Edgewood Ave. N.E., Atlanta, Ga., LB. $69,058, pumps;
Climax Eng. & Pump Mfg. Co., 208 S. La Salle St., Chicago, Ill., LB. $60,101, generators;
Whitmore Eng. Co., Langford Bldg., Miami, Fla., LB. $194,485, electrical work, for water supply imprvs. ST. PETERSBURG, FLA. City, City Hall, St. Petersburg, Fla. Bids Feb. 26. CD 1/6.
M. & W. Contr. Co., Tupelo, Miss., CA. $76,700. county roads 5.018 mi. imprvs.;
Paul Anthony Constr. Co., Tupelo, Miss., CA. $81,401. bridge and approaches on county road, Proj. S 812-2. PITTSBORO, MISS. Bd. Supervs., Calhoun Co., Pittsboro, Miss. Bids Mar. 2. CD 2/17.

† **U. S. Eng.**, foot of Prytania St., New Orleans, La., cancelled bids to have been opened Mar. 3, Wax Lake West Drainage Structure, St. Mary Parish, Inv. No. 53-154, LOUISIANA. CD 2/3.

▲ **L. E. Farley, Inc.**, 2609 Sunset Blvd., Houston, Tex. CA. $1,000,000. 55 mi. 16 in crude oil trunk line from Raceland to Plaquemine, LOUSIANA. Interstate Oil Pipe Line Co., c/o Standard Oil Bldg., Shreveport, La. CD 8/21.

T. L. James & Co., Ruston, La., CA. $175,420, approx. 41,990 sq. yd. concrete pavement and all work incidental thereto, NEW IBERIA, LA. City, City Hall, New Iberia, La. Bids Mar. 2. CD 2/10.

BUILDINGS

LOW BIDS AND CONTRACTS

Public Housing Admin., 900 N. Lombardy St., Richmond, Va., postponed indefinitely bids to have been opened Feb. 17, 250 portable family units, HOUSING, utilities and site work, Defense Housing Proj. 8D1, Camp Pickett, BLACKSTONE, VA. CD 1/28.

▲ **Westinghouse Electric Corp.**, P.O. Box 868, Pittsburgh, Pa., CA. generator unit and equip.;

Stone & Webster Engr. Corp., 1403 Roseneath Rd., Richmond Va., CA. installation and general constr. (2nd unit) for Portsmouth POWER PLANT addn., double capacity to 220,000 kw. near PORTSMOUTH, VA. Virginia-Electric & Power Co., Boush & Bute Sts., Norfolk Va. Total est. $16,000,000-$17,000,000, CD 2/9/51, under Va., Norfolk-Portsmouth.

S. Waranch, Roosevelt Contg. Co., Halprin Dr., Norfolk, Va. Owner Builds. $960,000. 120 RESIDENCES, NORFOLK, VA.

George W. Kane, Greensboro, N. C., CA $315,000. MOTOR COURT, DURHAM, N. C. Carolina Motor Inn, Inc., c/o contractor.

Carolina Warehouse Co., Lumberton, N. C. Owner Builds. $95,000, WAREHOUSE addn., LUMBERTON, N. C.

Liberty Warehouse Co., Lumberton, N. C. Owner Builds. $85,000. tobacco WAREHOUSE addn., LUMBERTON, N. C.

Coggins Constr. Co., 1900 Hillsboro St., Raleigh, N. C. CA. $325,000 APARTMENT DEVELOPMENT, RALEIGH, N. C. Wake Supply Co., c/o contractor.

Jones Bros., Wilson, N. C. CA. $314,326, HOSPITAL addn., ROANOKE RAPIDS, N. C. Roanoke Rapids Hospital, Roanoke Rapids, N. C. Bids Feb. 27. CD 1/28.

▲ **Geo. A. Fuller Co.**, Munsey Bldg., Wash., D. C., LB, $9,734,000 Eugene Talmadge Memorial HOSPITAL, AUGUSTA, GA. State Hospital Auth., State Capitol, Atlanta, Ga. Bids Mar. 6. CD 1/26.

Jerome Constr. Co., 14 N. Abercorn St., Savannah, Ga., Owner Builds. $400,000. 75 RESIDENCES, AUGUSTA, GA.

Stabilization for 1/3 of a cent a square yard*

A Model 54 Wood Roadmixer delivering 350 tons of mix per hour on a Canadian highway job.

With a WOOD Roadmixer

Regardless of materials or binders, you get **lowest** cost per square yard or per ton with a Model 54 Wood Roadmixer—and here's why:

- You get up to 2800 tons of mix per 8-hour day—you spread your costs over **big** production.
- You have no central plant—you mix on the job—save equipment and manpower.
- You may use native or local soils.
- You have your choice of emulsion, road oil, soil cement, or other chemical mixes—giving complete flexibility in design.

That's just part of the Wood Roadmixer story. Get all of the facts on the Model 54, 42 and 36 from any Wood distributor, or write us direct.

*Per 1" of compacted depth

Box 620 • 6900 Tujunga Ave.
North Hollywood, California

ROADBUILDING EQUIPMENT
WOOD MANUFACTURING CO.

Export Offices: 3938 Wilshire Blvd. • Los Angeles 5, Calif. • Cable Address: Woodco

2 ways to make crane operations pay more



Rud-O-Matic Magnet Reel Tagline Combination

Steel tagline holds magnet steady and absorbs the load . . . protective slack is maintained in expensive magnet cable to avoid jerking, pulling loose at the terminals or snagging.

Standard with major crane manufacturers, made in five sizes for your present equipment.

Rud-O-Matic Tagline

steadies your clamshell buckets. Provides ample coil spring power at all boom angles to keep bucket lined up with the work. Makes more loads per day easier. Rud-O-Matics are foolproof, trouble-free. Eight sizes meet all requirements. Available immediately. *For full information see your dealer—or mail coupon below.*

I'd like more information on ☐ Rud-O-Matic Taglines, ☐ Rud-O-Matic Magnet Reel-Tagline Combinations. Send literature and complete details.

Name_____

Company_____

Address_____

City_____ Zone____ State_____

McCAFFREY-RUDDOCK Tagline CORPORATION

2131 East 25th Street • Los Angeles 58, California

Louis Briggs Constr. Co., 3984 Emory Dr., Mason, Ga., CA, $321,355, Plo Nano Negro SCHOOL MACON, GA. Bibb Co. Bd. Educ., Court House, Macon, Ga. Bids Mar. 3. CD 1/22/48.

David W. Thornton, 762 Cherry St., Macon, Ga., Separate Contracts, $850,000, 150 RESIDENCES, MACON, GA.

Beeler & Higgs, 1401 Campbell Ave., Jacksonville 7, Fla., LB, $391,802, Negro SCHOOL, Forest and Goodwin Sts., JACKSONVILLE, FLA. Bd. P. Instruction, 605 Ocean St. Jacksonville 2, Fla. Bids Mar. 4. CD 2/4.

Hilbert Sapp, Orlando, Fla., Owner Builds, $400,000 53 addn. RESIDENCES, LAKELAND, FLA.

Southern Home Builders Corp., 535 Caligula Ave., Coral Gables, Fla., CA, $400,000, 50 RESIDENCES, MIAMI, FLA. Shermac Corp. c/o contractor.

Edward J. Gerrits, 3455 N. W. 2 Ave., Miami, Fla., CA, $300,000, Parochial SCHOOL MIAMI, FLA. Holy Redeemer Church, c/o contractor.

Beall Constr. Co., Sarasota, Fla., Owner Builds, $400,000, OFFICE, SARASOTA FLA.

Bernard & Byrd, P.O. Box 1688, Mobile, Ala., CA, $644,841, Trade SCHOOL MOBILE ALA. Alabama State Bd. Educ. 3630 S. Perry St., Montgomery, Ala. Bids Feb. 27. CD 3/6, under LB.

Bear Bros., 25 E. Jefferson St., Montgomery, Ala., CA, $331,650, Capital Junior High SCHOOL addn., MONTGOMERY, ALA. Montgomery Co. Bd. Educ., Court House, Montgomery, Ala. Bids Mar. 2.

Shelby Constr. Co., 1106 Canal St., New Orleans, La., CA, $400,000, SHOPPING CENTER JACKSON, MISS. Northwood Shopping enter, Inc, c/o contractor.

Southern Constr. Co. Columbia, Miss., LB. $304,340, HOSPITAL, COVINGTON, LA. St. Tammany Parish Police Jury, Covington, La. Bids Mar. 2. CD 2/3.

Schill-Wolfson, 2600 Poydras St., New Orleans, La., Owner Builds. $400,000. 46 RESIDENCES, KENNER, LA.

MIDDLE WEST

BIDS ASKED—HEAVY CONSTRUCTION

▲ Ill., Chicago—B.A. 3/24—City, City Hall, Wrightwood Auxiliary Sewer, Logan Blvd. and Wrightwood Ave. to Whipple St. $1,750,000. CD 1/21.

Wis., Milwaukee—B.A. 3/25—City, City Hall, repairs, alterations to south side of Wisconsin Ave. Viaduct. $160,000. Plans deposit $10. Lloyd D. Knapp, city engr. CD 4/14/43.

Wis., Watertown—CLEARING, etc.—B.A. 3/26—City, City Hall, clearing, grading, drainage for municipal airport. Plans deposit $15. Green Eng. Co., 1419 University Ave., Middleton, engr. CD 1/26/45.

GRACE
Asphalt and Compaction Equipment

3 sweeper models, axle, engine or tractor powered.

Chip spreaders 8′ to 12′ width. Also asphaltic concrete spreaders.

Rapid Fire circulating heaters heat and unload large tanks of asphalt.



Rapidspray Maintenance Distributors. Also heaters for production melting of barreled asphalt.

Sheepsfoot Rollers
250 to 600 psi.

Pneumatic rollers
7 to 50 tons.

W. E. GRACE MFG. CO.
6015 S. Lamar Dallas, Tex.

REPOWERED
and REJUVENATED with

S-N
REDUCTION GEARS

THEY EASE YOU THROUGH THE TOUGH ONES

Eliminate Costly Repairs— Replacements and Down Time

Insure "like-new" performance by repowering your industrial equipment with the world famous S-N heavy duty, herringbone Reduction Gears. Hundreds of S-N installations in construction equipment are being used to transmit the full power from engine to load smoothly, quietly . . . at the most economical speed of the driven equipment. They're built to lick the grueling, extra tough continuous assignments!

S-N Reduction Gears are available in a broad range of reduction ratios — of 1.5:1 up to 4.1 and from 50 to 900 H.P. Why not take advantage of the nearly half century of S-N transmission experience? Let S-N engineers specify the best unit for maximum performance on your equipment.

SNOW-NABSTEDT
Transmission Engineers
FOR NEARLY HALF A CENTURY
INDUSTRIAL DIVISION
THE SNOW-NABSTEDT GEAR CORP., HAMDEN, CONN.

BIDS ASKED—BUILDINGS

† **Ill., Hanna City**—MESS HALL—B.A. 3/25—U. S. Eng., 475 Merchandise Mart, Chicago, Zone 54, mess hall extension in vicinity of Hanna City, Serial No. ENG 11-032-53-68.

Wis., Waukesha—SCHOOL—B.A. 4/6—Bd. Educ., Waukesha, elementary school. $400,000. Ebling, Plunkett & Keymar, 1220 N. Milwaukee St., Milwaukee, Zone 2, archts. CD 12/29.

O., Maple Heights—SCHOOL—B.A. 4/7—Bd. Educ., Maple Heights, Dunham Road Elementary School addn. $450,000. Plans deposit $20. Outcalt, Guenther & Assoc., 13124 Shaker Square, Cleveland, archts. CD 10/15.

Wis., West Bend—SHOP—B.A. 4/15—Washington Co., West Bend, 2 story, 116x153 ft., rein.-con., steel, brick hy. shop addn. $225,000. V. H. Esser, 4061 N. Prospect Ave., Milwaukee, Zone 11, archt. CD 7/3/52.

Ill., Lake Forest—SCHOOL—B.A. Late in July—School District 67, 400 E. Illinois St., school, Deerpath Rd. near Route 41. Childs & Smith, 20 N. Wacker Dr., Chicago, Zone 6, archts. CD 10/22.

Ill., Tonica—SCHOOL—Bids Asked—School District 79, Bondi Bldg., Galesburg, 1 story, part, bsmnt., brick, concrete grade school. $400,000. Leslie R. Winsauer, Bondi Bldg., Galesburg, archt.

Mich., Dearborn—HIGH SCHOOL, etc.—Bids Asked—Convent of Sacred Heart Parish, 11515 Woodrow Wilson St., Detroit, 2 story, brick, steel, concrete high school and auditorium. $300,000. Herman & Simons, 804 Transportation Bldg., Detroit, archts.

SOON LETS CONTRACT—BUILDINGS

Ill., Chicago—WAREHOUSE, etc.—Continental Distributing Co., 514 W. Erie St., soon lets contract Warehouse and office, $750,000. A. Epstein & Sons, 2011 Pershing Rd., Zone 9, archts. CD 11/13.

Ill., Cicero—FACTORY—Royal Continental Box Co., 2214 W. Fullerton St., Chicgao, soon lets contract box factory, 47 St. and 13 St. Emil L. Larson, 4814 N. Damen St., Chicago, Zone 40, archt.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ **OHIO**—State Hy. Dpt., State Office Bldg., Columbus, **W. L. Harper Co.**, 2910 Highland Ave., Cincinnati, O. LB **$467,387**, est. $440,530, Type T-71, 1.378 mi. USR 23-(6.96-7.45), A-F-538 (10), Village of Piketon, Pike Co.;

The W. J. Seidensticker Co., 209 S. High St., Columbus, O., LB **$454,719**, est. 453,460 Type T-35 on B-70 and structures 1.122 mi. USR 23-(11.60-12.70), A-F-538 (9), Village of Waverly, Pike Co.;

Ohio Asphalt Paving Corp., 823 Prospect St., Portsmouth, O., LB **$453,075**, est. $375,950, Type T-35 on B-70, 1.78 mi. USR 23-3.36, A-F-626 (15), Scioto Co. Bids Mar. 3. CD 2/16.

OHIO—State Hy. Dpt., State Office Bldg., Columbus, **Baker & Hickey Co.**, P. O. Box 5008, Tri-Village Station, Columbus, O., LB **$548,769**, est. $564,480, structure, 0.14 mi. USR 23-8.63, A-F-538 (8), Village of Piketon, Pike Co. Bids Mar. 3. CD 2/16.

Frank Messer & Sons, Inc., Paddock Rd., Cincinnati, O. CA. Approx. **$200,000**, Vine St. stadium and lighting sys.; grading, water lines, sewer lines, tile drains, meters, CINCINNATI, O. Roger Bacon High School, 4316 Vine St., Cincinnati, O. J. R. Biedinger, Traction Bldg., Cincinnati, O., engr. Awarded Mar. 4. CD 1/9/50.

† **George Sheaf & Co.**, 449 Nielston St., Columbus 3, O., LB **$445,699**, est. $438,606, 1 story, 30,000 sq. ft. aero-medical engineering laboratory, Wright-Patterson Air Force Base, ENG 15-029-53-3, DAYTON, O. U. S. Eng., 830 W. Broadway, Louisville 3, Ky. Bids Mar. 3. CD 1/30.

† **W. L. Harper Co.**, 2910 Highland St., Norwood, O. CA **$467,387**, grading, draining, concrete paving 1.37 mi. PIKETON, O. Atomic Energy Comn., 1901 Constitution Ave. N. S. Wash. 25, D. C. Awarded Mar. 3.

Thos. H. Bentley & Son, 3131 W. Mill Rd., Milwaukee, 9, Wis., LB, **$113,430**, general contract superstructure for incinerator, MILWAUKEE, WIS. City, City Hall, Milwaukee, Wis. Bids Feb. 27. CD 2/18.

Speedway Contg., 1335 N. 3 St., Milwaukee, 12, Wis., CA, **$122,825**, sewers in N. 19 St. and W. Honey Creek Dr., MILWAUKEE, WIS. City, City Hall, Milwaukee, Wis. Bids Feb. 20. CD 2/18.

▲ **MICHIGAN**—State Hy. Dpt., Charles M. Ziegler, chn., 220 Townsend St., Lansing, Zone 13,

Louis Garavaglia, 24240 Mound Rd., Center Line, Mich., and Denton Constr. Co., 7-170 General Motors Bldg., Detroit, Mich., CA. **$1,289,200**, grading, draining 0.114 mi. and 36 ft. c. conc. paving service roads, ramps and utilities, 0.869 mi. G-D dual 36 ft. c. conc. ramps, service roads, utilities, BUI 82-64 C28 (BUI 391-52), BUI 82-65 C7 (BUI 391-52), Wayne Co.; E. P. Brady Co., Flint, Mich., CA. **$89,150**, grav. resurfacing Gladwin Rds., Montmorency, Alcona Rds., Lapeer, Osconda and Alpena Rds., various counties. Bids Feb. 25. CD 3/4, under LB.

Consumers Power Co., Central Div., H. L. Ziegenbein, mgr., Jackson, Mich., Owner Builds, **$160,000**. gas supply facilities, gas lines and imprvs. Greenville, MICHIGAN. CD 2/25/53.

Ray D. Baker Contractor Inc., 19200 W. Eight Mile Rd., Detroit, 19, Mich., CA. **$127,873**, sewage treatment plant, 1,400 ft. 6 in. c.i. force main, pumping station, 2,300 ft. 10 in. vitr. sewer, MILFORD, MICH. Huron-Clinton Metropolitan Auth., P. K. McWethy, secy., 1750 Guardian Bldg., Detroit, Mich. Bids Feb. 10, awarded Feb. 12. CD 1/21.

Imperial

THE *Finest*

TRACING CLOTH

Imperial is known in drafting rooms all over the world as the traditional quality tracing cloth.

With the background of decades of experience, its makers have pioneered in modern improvements to maintain Imperial as the finest tracing cloth made.

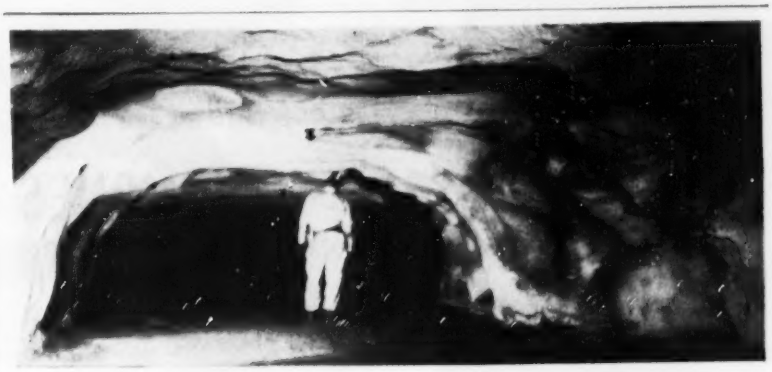

MINES FIND MANY USES FOR "GUNITE" APPLIED WITH "CEMENT GUN"

The photograph above shows "Gunite" applied directly against the slopes and ceilings of a coal mine's passageways to prevent rock fall due to air slacking. The savings effected through improved safety records and decreased repair time are obvious. Where "Gunite" is applied unreinforced, a thickness of ½" to 1" is generally used. With reinforcing mesh "Gunite" up to 2" thick or greater may be applied. Similar specifications are used for rock tunnels, shafts, cutoff walls, rock cut surfaces, etc.

Many instances of "Gunite" applications in mines, sewers, water tunnels and in other underground locations are completely illustrated and described in our new catalog. A request on your letterhead, for Catalog A2400 will bring your copy by return mail.

CEMENT GUN COMPANY
"GUNITE" CONTRACTORS
GENERAL OFFICES—ALLENTOWN, PENNA. U.S.A.
MANUFACTURERS OF THE CEMENT GUN

LET US SHOW YOU HOW TO CUT COSTS WITH ATLAS EASY TO HANDLE

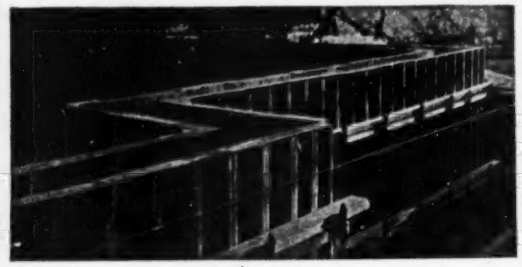

ALL STEEL — for indefinite use without repair.
LOW LABOR COST — No special tools or skill required.
ADAPTABLE, ACCURATE and STRONG — Can be used for walls, slabs, circular or rectangular structures. *Will not warp, crack or splinter. Will not deflect under any reasonable pour.*

Easily assembled with wedge clips.

Liberal Rental Purchase Option Plan Available. Write Dept. NR-3 for details.

IRVINGTON FORM & TANK CORP.
20 Vesey St. New York 7, N. Y.

LABOR-SAVING *SPEED* FORMS

SPEED BULK MATERIAL HANDLING

SCOOT-CRETE

BUILT FOR THE TOUGH JOBS!

Scoot-Crete Model N-52
Pay load, 3,000 lbs.

Scoot-Crete's heavy-duty, truck transmission stands up under the worst operating conditions; delivers maximum horsepower from the Wisconsin AEN air-cooled engine to the heavy-duty, high-traction 7:50x10, 6-ply U. S. Royal tires. Scoot-Crete scoots 3,000 lb. loads up 25% grades, in plants and at construction sites, has caster steering—turns in its own 90° over-all length. Dump box body interchangeable with flat rack in a few minutes. Speeds, 1 to 15 mph. 14, 16, 20 cu. ft. capacities. Today, write for specifications and performance facts.

GETMAN BROTHERS
Manufacturing Division
South Haven, Michigan

Sound powered

TELEPHONES

NO CURRENT REQUIRED

Indoor and Outdoor Models

For permanent installation on industrial projects or temporary use on construction jobs. Minimum upkeep. Selective or common ringing and semi-selective or common talking.

WRITE FOR CATALOG

HOSE-McCANN TELEPHONE CO., INC.
761 THIRD AVENUE
BROOKLYN 32, N. Y.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **H. L. Vokes Co.**, 1000 Wayside Rd., Cleveland, O. CA Approx. $1,000,000. 1 story, 100,000 sq. ft. brick, stone, FACTORY and OFFICE bldg., on 18-acre site on Brookpark Rd. near W. 150 St., Brook Park, CLEVELAND, O. Cleveland Steel Products Corp., 7306 Madison Ave., Cleveland, O.

▲ **Clifton Park Apartments, Inc.**, 374 N. Virginia Rd., Columbus, O., Owner Builds. $1,170,000. eighteen 3 story brick APARTMENTS, COLUMBUS, O.

Bolton-Pratt Co., 1276 W. 3rd St., Cleveland, O., CA Approx. $750,000. Automatic distr. (electric power) SUB-STATION, incl. 1 story, 24x72 ft. bldg. at 20600 Center Ridge Rd., on 1.35 acre site, ROCKY RIVER, O. Cleveland Electric Illuminating Co., Public Square, Cleveland, O. Awarded Mar. 3. CD 11/17.

Allied Builders, Inc., Lebanon, Ind. Owner Builds. $600,000, 50 HOMES, FRANKFORT, IND.

Hancock County Development Co., 36 N. State St., Greenfield, Ind., Owner Builds. $450,000. 20 stone RESIDENCES, GREENFIELD, IND.

JED Constr. Co., 506 Lemcke Bldg., Indianapolis, 5, Ind., Owner Builds, $500,000, 50 HOMES in Ralston Addn., INDIANAPOLIS, IND.

Regent Constr. Co., 262 Bradley St., Indianapolis, 10, Ind. Owner Builds. $480,000, 40 RESIDENCES, INDIANAPOLIS, IND.

Allied Builders, Inc., Lebanon, Ind., Owner Builds. $600,000, 50 National HOMES in Ulen District, LEBANON, IND.

R. L. Steinberger, Third and Broad Sts., Logansport, Ind., Owner Builds. $300,000, 25 HOMES, LOGANSPORT, IND.

† **J. L. Simmons Co., Inc.**, Marion, Ind., LB. $677,000. DINING HALL addns., alterations, Bldgs. 16 and 122 Veterans Administration Hospital, MARION, IND. Veterans Admin., Munitions Bldg., Wash., D. C. Bids Mar. 3.

Forest Jake Webber, Plainfield, Ind., Owner Builds. $300,000, 25 National HOMES, PLAINFIELD, IND.

Community Homes, Inc., Whiteland, Ind., Owner Builds. $350,000, 30 HOMES in Maplecrest Addn., WHITELAND, IND.

Glenn Mills, Inc., 16104 Ecorse St., Allen Park, Mich., Owner Builds. $800,000. brick housing, Allen, Reeck and Southfield Rds., ALLEN PARK, MICH.

▲ **B. L. Smokler & Co.**, 1200 Penobscot Bldg., Detroit, Mich. Owner Builds. $1,300,000. 125 brick single HOUSES, Leslie and Allen Rds., ALLEN PARK, MICH.

▲ **O. W. Burke Co.**, 1032 Fisher Bldg., Detroit, Mich. CA $1,994,394, 4 story with two 1 story wings, brick, steel, concrete, 150 bed capacity PSYCHIATRIC HOSPITAL, Hastings, Rivard, Lafayette and Macomb Sts., DETROIT, MICH. State of Michigan, A. N. Langius, dir. State Bldg. Dpt., Lansing, Mich. Bids Feb. 18. CD 2/25, under LB.

WEST OF MISSISSIPPI

BIDS ASKED—HEAVY CONSTRUCTION

Kan., Wichita—CONTROL TOWER—B.A. 3/25—Boeing Airplane Co., Plant No. 11, Personnel Bldg., Wichita, Kan. flight hangar control tower, Air Force Plant 13. Wilson & Co., 223 N. Santa Fe St., Salina, consult. engrs. Plans deposit $15.

Mo., St. Louis—PILE FOOTINGS, etc.—B.A. 3/26—Bd. Educ., H. V. Rhodes, comr. School Bldgs., 911 Locust St., Zone 1, pile footings, foundation, excavating and grading, new water service, etc. for proposed Technical High School, McRee and Hereford Aves. near Northrop Ave. F. Ray Leimkuehler, c/o owner, archt.

† **Kan., Topeka**—BUILDING—B.A. 3/27—Base Contg. Office, Topeka, renovation of Bldg. T-102, Forbes Air Force Base, IFB 14-6-3-53-26. CD 5/19/52.

† **N. M., Roswell**—SEWAGE TREATMENT PLANT—B.A. 3/27—U. S. Eng., Box 1538, Albuquerque, increasing capacity existing sewage treatment plant, Inv. No. Eng. 29-005-53-90. $75,000. Plans deposit $25. CD 2/19.

† **Okla., Oklahoma City**—JET ENGINE TEST BLDG.—B.A. 3/30—U. S. Govt., c/o Directorate of Procurement and Production, Tinker Air Force Base, Oklahoma City, four-cell high thrust jet engine test bldg., Bldg. T-24, Inv. Serial No. (IFB) 34-601-53-344. $500,000. Extended date. CD 2/10.

† **Neb., Lincoln**—TELEPHONE EXCHANGE—B.A. 3/31—U. S. Eng., 1709 Jackson St., Omaha, telephone exchange and communication bldg., Lincoln Air Force Base, Inv. 25-066-53-139. CD 7/17/52.

BIDS ASKED—BUILDINGS

† **N. M., Las Cruces**—LABORATORY—B.A. 3/25—U. S. Eng., Box 1538, Albuquerque, laboratory addn., exten. Inv. No. Eng 29-005-53-95. $400,000. Plans deposit $50. Extended date. CD 1/29.

▲ **Tex., Abilene**—HIGH SCHOOL—B.A. 4/3—Abilene Independent School Dist., Abilene, high school, $2,000,000. Plans deposit $75. David S. Castle Co., Box 124, engr.-archt. CD 8/20.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

† **U. S. Eng.**, 1709 Jackson St., Omaha, Neb., cancelled bids to have been opened Mar. 3, seeding, planting, Gavins Point Dam Proj. near Yankton, Inv. 25-066-53-184, SOUTH DAKOTA. CD 2/12.

Ritchie Bros., 1820 N. Mosley St., Wichita, Kan., CA, $133,850, street imprvs., WICHITA, KAN. City, City Hall, Wichita, Kan. Bids Feb. 3. CD 1/22/45.

OKLAHOMA—State Hy. Dpt., Capitol, Oklahoma City,

J. H. Barton, 1916 N. Broadway, Oklahoma City, Okla., CA. $122,873, est. $144,381, six concrete bridges, State Hy. 2, Muskogee Co. Bids Mar. 3, awarded Mar. 4.

City, City Hall, Abilene, Tex., Own Forces. $100,000, reconditioning and imprvs. some streets; $90,000, some asphalt street paving, ABILENE, TEX. CD 4/24.

City, Arlington, Tex., Own Forces. $65,000, some sanitary sewer collection lines, ARLINGTON, TEX. Joe J. Rady, 511 Insurance Bldg., Fort Worth, Tex. engr. Fred Casper, city engr. CD 2/26.

City, Arlington, Tex., Own Forces. $42,000, c.i. water distr. lines, ARLINGTON, TEX. Joe J. Rady, 511 Insurance Bldg., Fort Worth, Tex., engr. Fred Casper, city engr.

Dodds & Wedegartner, Inc., 382 N. Bowie St., San Benito, Tex., LB $69,584, some sewers, Part of Master Drainage System, BROWNSVILLE, TEX. City, Brownsville, Tex. Bids Feb. 26. CD 2/17.

Dofman's & Assoc., Brownsville, Tex., rejected bids Dec. 1, constr. and paving 400-auto capacity parking center, BROWNSVILLE, TEX. CD 11/21.

F. S. Oldt Co., 403 S. Haskell St., Dallas, Tex., CA. $39,100, est $45,000, water mains, Glendale Addn., Caruth Hills No. 3 and 24 in. line in Marsh Lane from Walnut Hill Lane to Royal Lane, DALLAS, TEX. City, City Hall, Main and Harwood Sts., Dallas, Tex. Koch & Fowler, 3900 Lemmon St., Dallas, Tex., engrs. Bids Dec. 16, awarded Feb. 27.

Texas Bitulithic Co., 2121 Irving Blvd., Dallas, Tex. LB $73,718, White Rock Relief Bridge, Skillman Ave. extens., concrete culverts, DALLAS, TEX. Comrs. Dallas Co., Court House, Dallas, Tex. Koch & Fowler, 3900 Lemmon St., Dallas, Tex., engrs. Bids Feb. 26. CD 11/12.

Sutton & Stone Constr. Co., Gulf States Bldg., Houston, Tex., CA. $41,200, water lines, facilities, inside of tract, DUNCANVILLE, TEX. Sam Sutton & Assoc., Gulf States Bldg., Dallas, Tex.

Sutton & Stone Constr. Co., Gulf States Bldg., Houston, Tex., CA $67,000, sanitary sewers, $67,275 storm sewers, open drainage, DUNCANVILLE, TEX. Sam Sutton & Assoc., Gulf States Bldg., Dallas, Tex. CD 2/26.

Briggs-Weaver, Box 5609, Dallas, Tex., LB $69,700, No. 6-A; $25,564, Part 6-B, pumping unit, FORT WORTH, TEX. City, City Hall, Fort Worth, Tex. Bids Feb. 26. CD 2/5.

Byron Jackson Co., 206 Reserve Loan Life Bldg., Dallas, Tex., LB $36,299, est. $60,000, water supply well and pumping unit, PARK CITIES, TEX. Dallas County Park Cities Water Control & Imprvt. Dist. 2, 8527 Harry Hines Blvd., Dallas, Tex. Bids Feb. 27. CD 2/4.

Midland Constr. Co., Texas City, Tex., LB $85,297, est. $60,000, storm drainage, Unit 2 of program, TEXAS

Does the Heaviest—Most Rugged



Type of Road Construction Work

W. A. Riddell Corporation's WARCO Heavy-Duty MOTOR GRADERS do more work faster — with less operator fatigue — because all blade positions are obtained from the cab. ROCKFORD CLUTCHES meet the varying load and engine torque conditions of this high-powered, exceptional capacity unit. Let ROCKFORD clutch engineers help provide steady, constant power transmission control for your machines.

ROCKFORD CLUTCH DIVISION BORG-WARNER
313 Catherine Street, Rockford, Illinois, U.S.A.

B-W ENGINEERING MAKES IT WORK

B-W PRODUCTION MAKES IT AVAILABLE

ENGINEERING BULLETIN SENT ON REQUEST

ROCKFORD CLUTCHES

STOP
THAT LEAK FOR GOOD

9 SIKA COMPOUNDS TO END REPAIR PROBLEMS ON CONCRETE AND MASONRY

FOR PRESSURE LEAKS
(SIKA No. 2, SIKA No. 4A) Leaks are easily sealed on the exposed side with quick-setting SIKA mortar. It is not necessary to relieve pressure. SIKA No. 2 is used against heavy pressure or bleeders, SIKA No. 4A against seepage or moderate pressure.

FOR JOINTS OR CRACKS
(IGAS JOINT SEALER, SIKA CAULKING) IGAS JOINT SEALER seals even against pressure and continual movement. Will not sag, crack, dry out, become brittle or lose adhesion. In work above grade, SIKA CAULKING is used where highest resistance to atmospheric change is desired.

FOR EXTERIOR REPAIRS
(SIKA-KOTE, SIKA TRANSPARENTS) SIKA-KOTE, a protective and decorative coating in 9 colors and white, prevents moisture penetration on concrete and masonry structures. SIKA TRANSPARENTS render brick structures water-repellent and preserve their appearance.

FOR NON-LEAKING SURFACES
(SIKACRETE, SIKA-KOTE) Water-resistant SIKACRETE mortar is used wherever cement-coat work is indicated. Economical, easy to apply SIKA-KOTE prevents penetration of ground-moisture.

FOR GUNITING OR PRESSURE GROUTING
(SIGUNIT, SIKA No. 4, PLASTIMENT) For quick work against leaks or in tidal areas, SIGUNIT in mortar prevents washouts; SIKA No. 4 (GROUT-SIKA) accelerates set, increases cohesion of mortar and adhesion of grout to rock.

Send Today For

"15 STEPS TO BETTER CONCRETE CONSTRUCTION"

This new 12-page illustrated book discusses 15 materials of construction and maintenance. Complete with product descriptions and composition, specific uses, contributing properties, and Architect's Specifications. Write today for your free copy.

SIKA CHEMICAL CORPORATION
44 GREGORY AVENUE
PASSAIC, NEW JERSEY
PRESCOTT 7-8020

IN EVERY CORNER OF THE EARTH!

N W E

Kern AARAU

Frigid Arctic or Steaming Africa . . . You Can Rely on KERN!

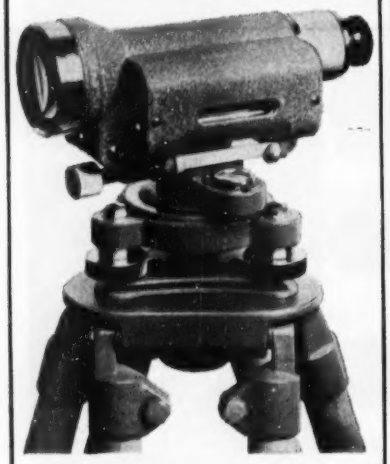

Enthusiastically acclaimed by engineers throughout the world . . . renowned for accuracy under ANY conditions . . . Kern precision instruments given you unquestioned accuracy . . . dependability . . . precision!

WORLD FAMED KERN NK-3

A superb triumph of designing skill, the NK-3 is the ideal instrument for exact technical levelings, larger length levelings and for tacheometrical surveys in flat country. A tribute to old-world skills . . . the NK-3 permits both the level and the leveling rod to be observed simultaneously through the telescope!

COMPLETE SPECIFICATIONS

Whether your job takes you to the swamps of India-China or the ice floes of Alaska . . . the NK-3 is the single answer to all your needs! Write TODAY for descriptive brochure and specifications.

Complete Service Department . . .
Factory Trained Personnel

Kern Surveying Instrument Division
PAUL REINHART CO., INC.
68 Beaver Street, New York City

CITY, TEX. Town, Texas City, Tex. Bids Feb. 25. CD 2/18.

† **U. S. Eng.,** Box 1229, Galveston, Tex. cancelled bids to have been opened Mar. 3, jet fuel storage, AVGAS storage with truck fill stand, Inv. No. Eng 41-243-53-106, Foster Air Force Base, VICTORIA, TEX. CD 1/30.

† **Pacific Oerlikon Co.,** 3001 N. Starr St., Tacoma, Wash., LB, $642,000, furnishing, installing, generators Little Porcupine Power Plant, Missouri River Basin Proj., Missouri-Souris Div., Spec. DC 3864, MONTANA, Bureau Reclamation, Dpt. Interior, Bldg. 53, Denver Federal Center, Denver, Colo. Bids Feb. 26. CD 1/22.

† **Bureau Reclamation, Dpt. Interior,** Casper, Wyo., rejected bids Feb. 12, earthwork, lateral lining, structures, Lateral 256 extension and wasteway; earthwork, structures Laterals 256-55R and 265 74L, Kendrick Proj., Spec. 703C-294, WYOMING. CD 1/21.

† **McKinley-Rountree,** 2220 - 19th St., Lubbock, Tex., LB $224,850, central heating plant addn., Kirtland Air Force Base, Inv. 29-005-53-85, ALBUQUERQUE, N. M. U. S. Eng., Box 1538, Albuquerque, N. M. Bids Feb. 25.

† **Southwestern Electric Co.,** Andalusia, Ala., LB $96,890, const. GCA and airport surveillance radar facilities, Walker Air Force Base, Inv. No. Eng 29-005-53-83, ROSWELL, N. M. U. S. Eng., Box 1538, Albuquerque, N. M. Bids Feb. 26. CD 1/22.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Barnhart Bros. Constr. Co.,** 1130 W. 27 St., Independence, Mo., CA, $1,000,000, 82 RESIDENCES south end of Rock Wood Heights Subdivision, INDEPENDENCE, MO.

Schneiderhan Constr. Co., 450 S. Brentwood Blvd., Clayton, 5, Mo., CA, 76x130 ft., brick, steel, concrete CHURCH, Marshall and Sarah Aves., MAPLEWOOD (St. Louis 17 P.O.), MO. Concordia Lutheran Church, Maplewood, Mo. Bids Feb. 18. CD 2/6.

I. E. Millstone Constr. Co., 4343 Clayton Ave., St. Louis, 10, Mo., CA, 1 story, 130x185, 122 ft., 23,000 sq. ft., masonry, steel, concrete WAREHOUSE, OFFICE, 4101 Geraldine Ave., ST. LOUIS, MO. Rudolph Realty & Investment Co., 1602 Locust St., St. Louis, 3, Mo. R. C. Hafner & C. A. Prokes, 4343 Clayton Ave., St. Louis, 10, Mo., engrs.

T. H. Maenner Co., City Natl. Bank Bldg., Omaha, Neb. Owner Builds. $450,000. 50 low priced DWELLINGS, 65 and Blondo Sts., OMAHA, NEB.

▲ **Dillon Realty Co.,** 3420 Jones St., Omaha, Neb. Owner Builds. $2,500,000. 200 DWELLINGS, 52 and Ames Ave., OMAHA, NEB.

Dofman's & Assoc., Brownsville, Tex., rejected bids Dec. 1, 17-unit SHOPPING CENTER, BROWNSVILLE, TEX. CD 11/21.

W. J. Burke & Sons, 110 Goliad St., San Antonio, Tex. CA. $327,500, 40 DWELLINGS, SAN ANTONIO, TEX. Highland Hills, Inc., 110 Goliad St., San Antonio, Tex. CD 2/17.

Jaffe & Martin, 202 Winewood St., San Antonio, Tex. Owner Builds. $309,250, 35 DWELLINGS, SAN ANTONIO, TEX. CD 2/17.

FAR WEST

BIDS ASKED—HEAVY CONSTRUCTION

† **Idaho, Twin Falls**—RANGE FACILITY—B.A. 3/26—Civil Aeronautics Admin., 1200 Exchange Bldg., Seattle, 4, Wash., VOR range facility at municipal airport, Inv. 1056.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

† **Schurr & Finlay, Inc.,** Box 155 Yorba Linda, Calif., LB. $80,850, est. $91,170, electrical distr. sys. and services, Davis-Monthan Air Force Base, ENG-04-353-53-88, TUCSON, ARIZ. U. S. Eng., 751 S. Figueroa St., Los Angeles, Calif. Bids Feb. 20. CD 11/7/51.

▲ **WASHINGTON**—Washington Toll Bridge Auth., Olympia,

Manson Constr. & Engrg. Co., 821 Alaskan Way, Seattle, Wash., CA. $1,051,476, est. $1,000,000 bridge over

Kern AARAU

PRECISION INSTRUMENTS SINCE 1819

TRANSCONTINENTAL . . . OR 'ROUND THE WORLD'



Wherever Accuracy and Precision Count . . . You Can Rely on KERN!

Whether it's the layout for a community in Westchester . . . or a map of unexplored Tibet . . . Kern precision instruments are your assurance of exact precision . . . positive accuracy!

TRADITIONALLY THE FINEST

Designed for maximum efficiency . . . simplest operation . . . every Kern precision instrument is the final result of over 150 years of study . . . a century and a half of constant improvement and progress. From the smallest ruling pen to the most advanced kit, every Kern instrument is a product of craftsmen born to their art . . . and educated by the world's strictest teachers!

FIND OUT TODAY

Right now, drop us a line. Will send you a beautifully illustrated brochure of Kern precision drawing instrument kits and individual pieces. Kit prices from $15 to $100.

BORDEN & RILEY PAPER CO.
60-R E. 11 Street, New York City

Hales Passage to Fox Island Pierce Co. Bids Dec. 23. CD 12/30, under LB.

▲† **Bethlehem Pacific Coast Steel Co.,** 20 and Illinois Sts., San Francisco, Calif., LB. **$2,844,406.** tower steel for Chief Joseph-Snohomish 345-kv line, Inv. 6913, WASHINGTON. Bonneville Power Admin., 827 N.E. Oregon St., Portland, Ore. CD 2/5/51.

† **Puget Sound Bridge & Dredging Co.,** 2929 16 Ave. S.W., Seattle, Wash. LB. **$107,940,** est. $97,660, maintenance channel dredging in Swinomish Slough, Inv. 53-54, La Conner, WASHINGTON. U. S. Eng., 4735 Marginal Way, Seattle, 4, Wash. Bids Feb. 24. CD 2/11.

† **L. A. Hopkins Co., Inc.,** Box 1101, Yakima, Wash., LB. **$111,979,** est. $159,870, 3000 ft. 12 in. sanitary water supply line 3,939 ft. 24 in. raw water supply line and 4,300 ft. insulated steam supply line, Hanford Works, RICHLAND, WASH. Atomic Energy Comn., Richland, Wash. Bids Mar. 3. CD 2/11.

† **H. Halvorson, Inc.,** Ziegler Bldg., Spokane, Wash., LB. **$817,332,** 41x202 ft. operations bldg., with 3 story bsmnt., tower and 52x70 ft., rein.-con. central heating plant, Ault Field, Spec. 35605, WHIDBEY ISLAND, WASH. P. Wks. Officer, Thirteenth Naval District, 1611 W. Wheeler St., Seattle, Wash. Bids Mar. 3. CD 2/9.

† **Coast Pipeline Contractors,** 580 Bragato Rd., Belmont, Calif., LB. **$305,487,** Schedule 1;

Kevry Constr., Inc., 655 Peralta Ave., San Leandro, Calif., LB. **$71,375,** Schedule 2, earthwork, pipe lines, structures Contra Costa Canal Distribution System, Central Valley Proj. DC 3880, CALIFORNIA. Bureau Reclamation, Dpt. Interior, Tracy, Calif. Bids Feb. 25. CD 1/26.

▲ **CALIFORNIA**—State Div. Hys., P. Wks. Bldg., Sacramento,

Guy F. Atkinson Co., 10 W. Orange Ave., South San Francisco, Calif., CA. **$1,055,875.** c. conc. on cement treated surf. subgrade plant mix on untreated rock surf. 7.9 mi. between Tulare Airport and Tagus, Tulare Co. Bids Feb. 18. CD 3/2, under LB.

† **E. A. Cornely,** 1277 Howard St., San Francisco, Calif., LB. **$70,322.** replacement of boilers, Bldg. 114, Veterans Administration Hospital, PALO ALTO, CALIF. Veterans Admin., Munitions Bldg., Wash., D. C. Bids Feb. 10. CD 2/16.

▲ **Carl N. Swenson Co., Inc.,** 1095 Stockton Ave., San Jose, Calif., CA. **$1,246,000.** airport concourses Contract 138, SAN FRANCISCO, CALIF. Public Utilities Comn., City Hall, San Francisco, Calif. Bids Feb. 10, awarded Mar. 2. CD 2/20, under LB.

▲ **Shepherd & Green,** 309 American Trust Bldg., Stockton, Calif., LB. **$1,178,000.** Transit Shed No. 9, STOCKTON, CALIF. Port Comn. of Stockton Port Dist., 123 N. El Dorado St., Stockton, Calif. Bids Mar. 2. CD 2/19.

BUILDINGS

LOW BIDS AND CONTRACTS

Newland Constr. Co., 1411 Racker Ave., Everett, Wash., LB. **$713,320,** general contract 1 story, 115,000 sq. ft. rein.-con., frame, Lynnwood Junior High SCHOOL, EDMONDS, WASH. School Dist. 15, Edmonds, Wash. Bids Mar. 2. CD 2/18.

E. E. Settergren, 3723 S.E. 21 St., Portland, Ore., CA. **$619,000,** Eliot SCHOOL, PORTLAND, ORE. School Dist. **No. 1,** 631 N. E. Clackamas St., Portland, Ore. Bids **Feb. 11,** awarded Feb. 26. CD 2/17, under LB.

CANADA

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ **Ontario Constr. Co. Ltd.,** Box 46, St. Catherines, Ont., CA, $1,000,000, two H barns for 200 horses and 40 stable hands, parking area, paddock, restaurant, barns expansion for 1953 meet, FORT ERIE, ONT. Ontario Jockey Club Ltd., 25 King St. W., Toronto, Ont. Awarded Feb. 26. CD 1/15.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Foster Wheeler Ltd.,** St. Catherines, Ont., CA, $1,000,000, OIL REFINERY, BONNYVILLE ALTA. Northern Leaseholds Ltd., Bonnyville, Alta.

Hartib Constr. Co., 3244 Bloor St. W., Toronto, Ont., CA, $825,009, three 3 story, bsmnt., sub-bsmnt., 25x140 ft., steel, brick, concrete APARTMENT BLOCKS TORONTO, ONT. Northcliffe Investments, c/o I. Boigan, archt., 1546 Avenue Rd, Toronto, Ont. Awarded Mar. 2.

G. Archambault Ltd., 726 Atwater Ave., Montreal, Que., Owner Builds, $550,000, five 3 story, bsmnt., 53x79 ft., brick, concrete APARTMENTS, MONTREAL, QUE.

ALASKA

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲† **ALASKA**—Alaska Road Comn., Juneau,

S. Birch & Son and Lytle & Green, Central Bldg., Seattle 4, Wash., LB. **$2,196,719,** grading, surf., bit. surf. 49.84 mi. Alaska Hy. Sect. C1. Bids Mar. 3. CD 2/6.

† **U. S. Eng.,** Anchorage, Alaska, cancelled bids to have been opened Mar. 11, provide steam heat in lieu of existing hot air heat in 213 barracks, mess halls, etc., Elmendorf Air Force Base, ENG-95-507-53-73, ALASKA. Will re-advertise. CD 2/16.

specialists in prefabricating pipe
Albert's Prefabrication meets the most exacting specifications for Oil, Chemical, Concrete, Asphalt, and other Industrial requirements.
Butt Welds • Bending All Types • Coiling • Machining • Threading • Beveling • Lining • Pickling • Galvanizing • Sand Blasting • Preheating • Stress Relieving • Testing •
Pipe—Wrought Iron-Steel • Seamless • Electric Weld • Spiral Weld • Lap Weld • Butt Weld • Shore Dredge • SPEED-LAY •
Piling — Sheet piling-lightweight-Tubular all sizes.
Pile Fittings — All types and sizes for steel and wood.
Write for Free Prefabrication Booklet.
ap
ALBERT pipe supply co., inc. BERRY AT NORTH 13TH ST. • BROOKLYN 11, N. Y.

dewater the Complete way
Wherever there's ground water, only "Complete" gives COMPLETE assurance of COMPLETE elimination of the hazard. These patented fluted tube wellpoints remove more water faster . . . more easily, more efficiently, most economically!
Write today for "Complete" catalog Dept. ER
COMPLETE MACHINERY & EQUIPMENT COMPANY, INC.
36-40 11th STREET
LONG ISLAND CITY, N. Y.
COMPLETE WELLPOINT SYSTEMS
FOR SALE OR RENT

SEE
New Products!
New Ideas!

1953 HANNOVER GERMAN INDUSTRIES FAIR
APRIL 26—MAY 5

Plan now to visit West Germany's Hannover Fair! See over 4,000 exhibits that include *Materials & Equipment for these industries:*

- Mining, Milling, Metalworking Machinery —Motors & Engines
- Electrical Manufacturing & Construction
- Tools
- Chemical & Other Processing
- Electronics
- Textile Machinery
- Automotive
- Office Supplies . . . and products for every industry!

Get full FREE facts. Call or write:
GERMAN-AMERICAN TRADE PROMOTION
350 Fifth Avenue, New York 1, N.Y.
Wisconsin 7-0727

you play it SAFE with Safety-Pulls

Just as important as the time and labor-saving advantages of Coffing Safety-Pull Ratchet Lever Hoists, is the way each one protects your men from injury, your equipment from damage.

Here's why:

Only the finest steel is selected for each part.

Hooks will not break or straighten out.

Dual ratchet and pawl will not slip — even if handle is accidently released.

Handle will bend before any other part is overloaded beyond safe limits.

Every Safety-Pull is tested at 100 percent overload.

Coffing Safety Pull Ratchet Lever Hoists. 10 roller chain models, ¾ to 15 tons. 2 coil chain models, ¾ and 1½ tons

Write for Bulletin EN 3SP — and the name of your nearest distributor. Make use of his broad experience and complete service facilities.

Quik-Lift Electric Hoists
Hoist-Alls • Mighty-Midget Pullers • Spur-Geared Hoists • Differential Chain Hoists • Load Binders
I-Beam Trolleys

COFFING HOIST COMPANY
Danville, Illinois

Clear the ENTIRE Opening for Doorway Efficiency



Kinnear Rolling Doors coil up and out of the way, clearing the entire opening, from jamb to jamb and floor to lintel! The rugged interlocking steel-slat curtain glides into instantaneous action with either manual or push-button control. Write now for all details.

The KINNEAR Manufacturing Company
1820-40 Fields Ave., Columbus 16, Ohio
1742 Yosemite Ave., San Francisco 24, Calif.
Offices and Agents in Principal Cities

Saving Ways in Doorways
KINNEAR ROLLING DOORS

Would you use 1925 construction equipment today? No. Why not change over and equip your jobs with modern office trailers and cut costs.

CONTRACTORS' OFFICE TRAILER
Models 24'—28'—35' Price $2100. to $3500.
Birch finish, drafting table, 2 built-in desks with letter files & drawers, other conveniences. Can offer three year finance plan. Write for pictures and plans.

TRAILER VILLAGE SALES, INC.
8642 Pulaski Highway, Baltimore 21, Md.
Phone: Essex 2233

HOT DIP GALVANIZING

YOU can profit by our experience of over 50 years in Hot Dip Galvanizing. Our equipment is modern, our men are skilled and our deliveries and prices are right.

We have galvanized thousands of tons of: gratings, beams, bars, perforated screens, sections, forms, tanks, fittings, rails, fastenings, etc. Excellent facilities for pickling and oiling.

ENTERPRISE GALVANIZING CO.
2517 E. CUMBERLAND ST. • PHILADELPHIA 25, PA.

Proposed Projects

WATER SUPPLY

▲ **S. C., Anderson**—Anderson Co. Water & Sewer Dist. 17, Anderson, WW and sanitary sewers. $2,300,000. John J. Harte Co., 284 Techwood Dr. N.W., Atlanta, Ga., consult. engr.

SEWERS, WASTE DISPOSAL

Calif., Petaluma—City, City Hall, $575,000 bond election Mar. 31, sewerage sys., addns., imprvs. Harry N. Jenks, 63 Crescent Dr., Palo Alto, consult. engrs.

▲ **Fla., St. Petersburg**—City, City Hall, sewage treatment plant near Albert Whitted Airport. $1,500,000. Smith & Gillespie, P.O. Box 1048, Jacksonville, consult. engrs. CD 9/2/43.

Mich., Birmingham—City, P. Wks. Dpt., Birmingham, bond election Apr. 6, sewage plant, treatment disposal facilities. $500,000. Ayres, Lewis, Norris & May, 500 Wolverine Bldg., Ann Arbor, consult. engrs.

▲ **Mich., Kalamazoo**—City, P. Wks. Dpt., $3,200,000 bond election Apr. 6, sewage disposal plant, treatment facilities, appurtenances, Jones, Henry & Schoonmaker, Security Bldg., Toledo, O., consult. engrs. CD 1/30.

▲ **Tenn., East Ridge**—Town, sanitary sewerage sys. $2,400,000.

Tex., Bryan—City, voted bonds Feb. 24, new sanitary sewer collection lines, $500,000; sanitary sewer disposal unit, $150,000; storm sewers, $100,000; sanitary sewerage sys. rehabilitation, $75,000. CD 2/9.

▲ **Ont., Sarnia**—City Council, E. Royden Colter, mgr., 3-phase, sewage disposal plant and 42-in. interceptor main along river front, $3,100,000; relief sewers Maxwell and Davis Sts., $1,221,500; extending storm and sanitary sewers into annexed areas, $12,000,000. James F. McLaren Assocs., 705 Yonge St., Toronto, Ont., consult. engrs. W. F. Greenwood, City Hall, Sarnia, engr. CD 6/25.

BRIDGES

▲ **CALIFORNIA**—Dpt. P. Wks., P. Wks. Bldg., Sacramento.
Contra Costa and Solano Counties—4-lane toll bridge paralleling existing bridge across Carquinez Straits. $34,000,000.

OKLAHOMA—State Hy. Dpt., Capitol, Oklahoma City, **Pawnee Co.**—bridge over Arkansas River at Blackburn. $500,000. G. H. Bittle, c/o owner, engr.

STREETS AND ROADS

O., Cleveland—City, City Hall, Zone 14, resurf. pavement of Euclid Ave. from Ontario St. to East Cleveland boundary line. $420,000. John C. Wenrick, City Hall, city comr. of engrg. CD 12/13/43.

OKLAHOMA—State Hy Dpt., Capitol, Oklahoma City, **Choctaw Co.**—farm to market road from Hugo to Rattau, $165,000. G. H. Bittle, c/o owner, engr.

Tex., Pasadena—City, voted bonds Feb. 21, hard-type street paving, various sections of city, $550,000; some general reconstr., extens., wid'n. existing streets, $200,000. George S. Smith, city engr. CD 2/5.

▲ **Va., Norfolk**—City, City Hall, Tidewater Dr., approx. 1.3 mi. 6-lane connecting link bypassing downtown traffic, $1,000,000. S. C. Morrisette, c/o owner, Dir. of P. Wks.

▲ **WASHINGTON**—State Hy. Comn., Olympia, **Klickitat Co.**—relocate and reconstr. Evergreen Highway, Maryhill to Roosevelt. $1,000,000. W. A. Bugge, state hy. engr. 3/19/53.

EARTHWORK, WATERWAYS

† **Kansas**—U. S. Eng., Davidson Bldg., Kansas City, Mo. stabilizing channel of Kaw River, Leavenworth and Lawrence, Leavenworth and Douglas Counties, $130,000. CD 5/29/44.

Md., Bladenburg—Prince George's Co., Marlboro, dredging Anacostia tributaries in vicinity of Bladensburg Peach Cross. $300,000.

Oklahoma—State Fish & Game Dpt., Capitol, Oklahoma City, dam and fish hatchery, on Gates Creek, near Hugo, Choctaw Co. $100,000. E. W. Dahlgren, c/o owner, engr.

Tex., Harlingen—Cameron Co. (Arroyo Colorado Navigation Dist., sponsors), Brownsville, voted bonds Feb. 24, construct portion Anzalduas Dam, $265,000; completion proposed imprvs. for navigation facilities, deepening channel, widening, dockage, $200,000. CD 1/22.

Tex., Pasadena—City, voted bonds Feb. 21, drainage, $125,000. George S. Smith, city engr. CD 2/5.

AIRPORTS

▲† **La., Houma**—AIRPORT FACILITIES—Eighth Naval Dist., 600 South St., New Orleans, plans by Curtis & Davis, 822 Perdido St., New Orleans, 21 buildings; runway extens., taxiways, electrical sys., railroad rehabilitation, engineering services, F. Shutts' Sons, Lake Charles, engr. $2,500,000.

▲† **Mo., Grandview**—HOSPITAL—U. S. Eng., 601 Davidson Bldg., Kansas City 8, Mo., hospital at Grandview Air Force Base, $1,629,000. CD 1/15/52.

▲ **Mont., Billings**—AIRPORT—City, City Hall $450,000 bond election Apr. 6, municipal airport runways addns., imprvs. other facilities. $1,000,000. Ed Waldo, City Hall, city engr.

▲† **Okla., Clinton**—AIR BASE—Dist. P. Wks. Office, 8th Naval Dist., Naval Station, New Orleans, La., plans by Wright & Selby, Hightower Bldg., Oklahoma City, rebuilding barracks and mess halls, $1,100,000; plans by Sorey, Hill & Sorey, 809 N. W. 36 St., Oklahoma City, admin. bldgs. and hangars, $2,000,000; plans by Vahlberg-Palmer-Vahlberg, 1323½ N. Robinson Air Base for the Air Force. Hudgins, Thompson, St., Oklahoma City, misc. bldgs. $800,000, at Clinton Ball & Assoc., 1100½ W. Main St., Oklahoma City, Zone 4, archts-engrs. for entire project.

▲† **S. D., Rapid City**—HOSPITAL—U. S. Eng., 1709 Jackson St., Omaha, Neb., hospital at Rapid City Air Force Base, $2,193,000. CD 11/12/51.

PUBLIC BUILDINGS

▲ **Calif., El Monte**—SCHOOLS—El Monte Union High School Dist., El Monte, voted $5,250,000 bonds schools. CD 1/8.

▲ **Calif., Los Angeles**—SCHOOL—Los Angeles City School Dist., 1425 S. San Pedro St., plans by A. C. Zimmerman, 2439 Hyperion Ave., Westchester High School in Westchester District $4,000,000. CD 6/13.

▲ **Calif., Pomona**—SCHOOLS—Pomona City High School Dist., Pomona, voted $1,400,000 bonds schools. CD 2/3.

Conn., Danbury—SCHOOL—City School Bldg. Comm., 20 West St., plans by Sherwood Mills & Smith, 65 Broad St., Stamford, elementary school, Lounsbury Property, $691,600. CD 2/9.

▲ **Conn., Fairfield**—HIGH SCHOOL—Town High School Comm., C. J. McClinch, Sr., Chn., Town Hall, high school, eastern end of town. $1,000,000.

Conn., Groton—HIGH SCHOOL—Town, R. S. Haggard, Distr. Selectman, Town Hall, plans by Warren H. Ashley, 299 Bishop Rd., West Hartford, Senior High School, $850,000.

Fla., Sanford—HOSPITAL—Seminole Co., plans by Elton J. Moughton, Sanford, and James Gamble Rogers II, Winter Park, hospital. $900,000. CD 11/17.

Ill., Crete-Monee—SCHOOL, etc.—Crete-Monee School District, plans by Naess & Murphy, 80 E. Jackson Blvd., Chicago, Zone 4, high school and gymnasium $700,000.

▲ **Ill., Highland**—SCHOOLS—Community Unit School District No. 5, Bd. Educ., Highland, plans by S. T. Papst & Assocs., Goldman Bldg., East St. Louis, 3 schools and existing school addns. $1,190,000. CD 2/12.

The above picture illustrates one of the many ways of applying a Sauerman Drag Scraper in the open storage of bulk materials. Here the scraper stores crushed rock in a high pile covering a large area and then reclaims (as shown in picture) to a hopper at processing plant.

SAUERMAN method . . .

Simplifies Material Handling!

Sauerman machines are powerful excavators and rapid conveyors of earth, clay, rock and stone, coal and other bulk materials. Equipment investment is moderate, since one machine digs, hauls and dumps automatically wherever required. One man, situated in a safely located cab overlooking the site, controls the entire operation.

Only the most expendable parts of a Sauerman scraper or cableway contact the material handled, thus wear is slight and maintenance requirements are few. Scrapers and cableway buckets are designed for maximum penetrating power and strength, with minimum weight. The result is economy in power consumption—gasoline diesel or electric.

Write today about your material handling problems and let Sauerman engineers solve them for you. Send for illustrated catalog which gives complete data and specifications.



Sauerman Scraper Excavator Digs Gravel from Hill.



Sauerman Scraper Stockpiler Stores and Reclaims.



Sauerman Slackline Cableway Works in Wet Pit.

Rope Haulage Equipment Specialists Since 1909

SAUERMAN BROS., Inc.

532 S. CLINTON ST. CHICAGO 7, ILLINOIS

3 REASONS WHY...

your materials handling improves with MARIETTA CONCRETE STORAGE TANKS....

1 ECONOMICAL—In addition to lower first cost, maintenance is at a minimum. Marietta tanks can help you save *now* because early erection is possible. A typical 12' x 50' tank can be erected in three days, ready for use. Save valuable production space.

2 DEPENDABLE—Marietta tanks are constructed of high-strength concrete staves with steel hoop reinforcing. The hoops are spaced to exact engineering specifications to withstand internal pressure. Marietta tanks erected over thirty years ago are still in constant use by many plants.

3 ADAPTABLE—Many sizes are available, unlimited arrangements are possible. Choose Air-Cell or solid concrete staves. Roof and wall can support materials handling equipment. Tanks can be erected on platforms, with connecting tunnels, or inside existing structures.

Get all the facts and installation case histories from—

THE MARIETTA CONCRETE CORP.

MARIETTA, OHIO

Branch Offices:

509 Fifth Avenue, New York 17, N. Y.
Pulaski Highway at Rossi Road, Baltimore 21, Md.
805 Bessemer Bldg., Pittsburgh 22, Pa.

McKIERNAN-TERRY

Double-Acting

PILE HAMMERS

- Used on a wider variety of pile-driving operations than any other make or type
- Preferred by engineers and contractors all over the world because of their uniform effectiveness and reliability
- All parts completely enclosed for protection against grit, dirt and damage, and for safety of operators
- Built in a range of 11 sizes for every pile-driving service, providing energy up to more than 19,000 foot-pounds per blow
- Furnished with angle iron guides. Anvils, base attachments and complete pile driving rigs also available for every type of pile and pile driving conditions and requirements

Write for Catalog describing the complete McKiernan-Terry line of Double-Acting and Single-Acting Pile Hammers and Double-Acting Pile Extractors.



MK 332

McKIERNAN-TERRY CORPORATION

Manufacturing Engineers

13 PARK ROW, NEW YORK 38, N. Y.

Plants: Harrison, N. J. and Dover, N. J.

Also builders of coal and ore bridges, bulk material unloaders and specially designed machinery.

McKIERNAN TERRY

soil sampling made easy!

Acker Soil Sampling Kit gives you accurate sub-surface information *Quickly— Easily— Inexpensively*

Write today for prices and bulletin 26 ENR

ACKER DRILL CO., INC., SCRANTON 3, PA.

Over 30 years of experience in the manufacture and development of drilling equipment

Ky., Louisville—SCHOOLS—Jefferson Co., Bd. Educ., W. Jefferson St., plans by Fred Harstein and Louis & Henry, McDowell Bldg., Junior High School, Rockford Lane (Shively area) $700,000; elementary school for Prestonia-Adair Dist., $500,000, E. R. Ronald & Assoc., 554 S. Third St., consult. engrs. CD 11/10/52.

▲ La., Bogalusa—SCHOOLS—Washington Parish School Bd., Bogalusa, bond election Apr. 24, Bogalusa High School, $965,985; Central Memorial Negro High School, $450,740; Columbia Elementary School, $345,432; Poplar Negro Elementary School, $307,280.

Mass., Winthrop—SCHOOL—Town, Supt. Schools, 45 Pauline St., plans by Perry Shaw & Hepburn, Kehoe & Dean, 31 St. James Ave., Boston, high school. $500,000.

▲ Mass., Weston—SCHOOL—Town, School Dpt., Weston, plans by Hugh H. Stubbins, Jr., 103 Pleasant St., Lexington, 1 story, brick, steel, concrete H-shaped elementary school off School St. $1,050,000. R. G. Vanderweil, 9 Newbury St., Boston, mech. engr. Le Roy M. Hersum, 6 Beacon St., Boston, structural engr. CD 8/1.

▲ Mass., Winthrop—SCHOOL—Town, Supt. Schools, 45 Pauline St., plans by Perry, Shaw & Hepburn, Kehoe & Dean, 31 St. James St., Boston, high school. $1,500,000.

▲ Mich., Ann Arbor—SCHOOLS—City, Bd. Educ., voted bonds, Feb. 24, brick, steel, concrete high school, $5,500,000; 2 elementary school addns. or 2 school addns. and elemetnary school, $1,450,000; 2 story, bsmnt., brick, steel elementary school, $700,000. CD 2/13.

▲† Minn., Fort Snelling (P.O. Minneapolis)—HOSPITAL BLDGS.—Veterans Admin., Vermont Ave. between H and I Sts. N. W., Wash. 25, D. C., plans by Magney, Tusler & Setter, 202 Foshay Tower, Minneapolis, remodeling bldgs. at Veterans Hospital. $2,070,000.

▲ Mo., Kansas City—SCHOOLS—Bd. Educ., H. W. Schooling, supt., Library Bldg., voted bonds Feb. 10, five schools, one school addn. $1,250,000. Edward N. Fuller, 701 E. 14 St., Zone 16, archt. Alfred Masterson, Lee Bldg., Zone 6, structrual engr. Howarth & Kinney, 101 W. 11 St., Zone 6, mech. engrs. CD 4/13/51.

▲ Mo., Kirkwood (St. Louis 22, P. O.)—SCHOOL—Bd. Educ., Kirkwood School District R-7, voted $1,250,000 bonds, schools and school addns. CD 1/30.

Mo., Mehlville (St. Louis 23 P. O.)—SCHOOL—School Dist. R-9, St. Louis Bd. Educ., Emil H. C. Bernard, supt. Schools, 623 West Ripa Ave., Lemay, Zone 23, defeated $840,000 bonds, school. Project postponed indefinitely. CD 2/20.

Mo., Nevada — SCHOOL — School Bd., Nevada, voted $500,000 bonds Feb. 24, school imprvs. CD 2/13.

▲ Mo., St. Louis—HOSPITAL—St. Louis State Hospital, 5400 Arsenal St., clinical and admin. bldg., $6,000,000; nurses quarters, $500,000; industrial and occupational therapy bldg., $500,000; physicians quarters, $250,000.

▲ N. J., Ancora—HOSPITAL—N. J. Div. Purchase & Property, State House, Trenton, completing existing project to provide 3,000 beds, incl. housing units, tuberculosis bldg., administration bldg., smaller units, State Hospital, $6,271,400. CD 3/27.

N. J., Bordentown—CELL BLOCK—N. J. Div. Purchase & Property, State House, Trenton, addnl. cell block bldg., New Jersey Reformatory. $600,000. CD 10/26/50.

▲ N. J., Greystone Park—DORMITORY, etc.—N. J. Div. Purchase & Property, State House, Trenton, reconstr. dormitory bldg. and constr. new housing units, State Hospital, $2,020,000. CD 5/15/50.

▲ N. J., Marlboro—HOUSING UNIT, etc.—N. J. Div. Purchase & Property, State House Trenton, housing unit, occupational therapy bldg., patients' farm dormitory, State Hospital, $1,524,000. CD 1/23/46.

▲ N. J., New Lisbon—DORMITORY FACILITIES, etc.—N. J. Div. Purchase & Property, State House, Trenton, addnl. dormitory facilities, occupational therapy bldg., and auditorium State Colony for Feebie Minded Males, $1,290,000. CD 12/20/45.

▲ N. J., Skillman—HOSPITAL, etc.—N. J. Div. Purchase & Property, State House, Trenton, hospital addns., new clinical facilities, completion of housing program, State Village for Epileptics (to be known as New Jersey Neuropsychiatric Institute) $1,341,400. CD 5/15/50.

N. J., Totowa—DOMITORY FACILITIES—N. J. Div. Purchase & Property, State House, Trenton, dormitory facilities at State Training School. $660,000. CD 5/15/50.

▲ N. J., Trenton—HOUSING—Trenton Housing Aunth., 875 N. Willow St., plans by Micklewright & Mountford, 72 Ewing St., housing, Mellon St. $1,500,000.

N. J., Vineland—DORMITORY—N. J. Div. Purchase & Property State House, Trenton, addnl. dormitory bldgs. at Almond Road Colony of Training School for Mentally Deficient Children. $1,333,200. CD 3/13/47.

N. J., Woodbine—DORMITORY, etc.—N. J. Div. Purchase & Property, State House, Trenton, addn. dormitory buildings and expansion of sewerage facilities, State Colony for Feeble-Minded Males, $990,000. CD 1/2/52.

▲ N. C., Goldsboro—SCHOOL—Wayne Co. Bd. Educ., Court House, Negro Senior High School, $600,000; Junior White High School, $450,000. CD 5/1/46.

▲ N. C., Raleigh—SCHOOLS—Bd. Comrs. Wake Co., Jesse O. Sanderson, School Supt., Court House, voted bonds Feb. 24, city and county schools, new schools and imprvs. $5,500,000. CD 1/8.

▲ O., Apple Creek—HOSPITAL—State Dpt. Welfare, State Office Bldg., S. Front St., Columbus, plans by

Sims, Cornelius & Schooley, 2901 N. High St., Columbus, 300-inmate hospital for violently insane at Apple Creek State Hospital. $1,450,000. CD 12/17.

O., Cleveland—SECURITY—City, City Hall, Zone 14, plans by Garfield, Harris, Robinson & Schafer, 1740 E. 12 St., Zone 14, addn. to serve as maximum security bldg., at Warrensville Workhouse to house 150-200 inmates, Warrensville, $500,000. CD 12/10/43.

▲ O., Marion—TRAINING SCHOOL—Dpt. P. Welfare, State Office Bldg., S. Front St., Columbus, plans by George S. Voinovich & Assoc., Swetland Bldg., Cleveland, buildings at Marion Training School. $5,625,000. CD 12/17.

▲ Pa., Coraopolis—HIGH SCHOOL—School Dist. of Moon Twp., R.D. 4, plans by Button & McLean, 119 E. Montgomery St., Pittsburgh, brick, block, steel Senior High School, Moon Twp. $1,781,868.

S. C., Barnwell—HOSPITAL—Barnwell Co., Barnwell, hospital. $500,000.

S. C., Bennettsville—HIGH SCHOOL—Marlboro Co. Bd. Educ., Bennettsville, plans by H. D. Harrall, Bennettsville, Senior High School, $500,000.

S. C., Pickens—HIGH SCHOOL—Pickens School Dist. A, Pickens, plans by Harold Woodward, Spartanburg, high school, $500,000. CD 11/23/45.

Tenn., Franklin — HOUSING — Franklin Housing Auth., Franklin, 100 housing units. $850,000.

▲ Tex., Bryan—GENERATING UNIT—City, voted bonds Feb. 24, electric power generating unit. $1,000,000. CD 2/9.

Tex., Dallas—WOMEN'S EXHIBIT, etc.—State Fair of Tex, Fair Park, plans by Gill & Harrell & Assoc., 1913 San Jacinto St., women's exhibit bldg. $600,000; plans by Fooshee & Cheek, 1901½ N. Harwood St., dormitory to house 200 herdsmen, $300,000. CD 2/27.

Tex., Houston—GARAGE—City, City Hall, 900 Brazos St., converting city auditorium into a 3 story auto parking garage. $850,000.

▲ Tex., Sugarland—PRISON UNIT—Texas Prison System, c/o Richard C. Jones, exec. asst., Huntsville, plans by George L. Dahl, 2101 N. St. Paul St., Dallas, prison unit, $1,250,000. CD 1/27.

▲ Va., Chesterfield—SCHOOLS—Chesterfield Co. School Bd., Chesterfield, $3,000,000 bond election Apr. 7, constr. 4 elementary schools, alterations and addns. to 13 existing schools, CD 10/30.

Wash., Vancouver—DORMITORY—State Dpt. P. Institutions, Olympia, plans by Stewart & Richardson, Central Bldg., girls' dormitory, Washington State School for Deaf. $800,000. CD 9/24/51.

Wis., Oshkosh—SCHOOL—Bd. Educ., Oshkosh plans by Perkins & Will, 309 Jackson Blvd., Chicago, Zone 6,

Aid Association for Lutherans Building, Appleton, Wis. Architects, Cram & Ferguson, Boston, Mass., & Maurey Lee Allen, Appleton, Wis.

Trial by Fire!

Mississippi Wire Glass Standard of Safety For Over Half a Century

Wire glass is the only material for glazing openings that can successfully withstand the fury of the flames in this dramatic Underwriters' Laboratory test. To qualify as Fire Retardant No. 32, the glass is first subjected to temperatures ranging up to 1600 deg. F. and later to a ¾" stream from a fire hose at 35 to 40 lbs. pressure. Passing the test requires that the glass remain in the sash substantially unchanged except for cracking due to thermal shock.

With an enviable record of protecting life and property, Mississippi Wire Glass helps bottle up fire . . . often prevents it from roaring into tragic and costly conflagration. And this proven product more than meets Underwriters' requirements — it is the standard upon which those specifications were established in 1899.

Mississippi Wire Glass affords constant protection at minimum cost in vertical shafts, partitions, exterior walls, skylights, windows, doors, and all other vulnerable locations where fire or breakage protection is desirable. A non-combustible, it offers other exclusive features in its corrosion resistance, rigidity, absence of shrinkage and in glazing advantages that far outweigh a possible slight difference in initial cost.

Specify Mississippi Wire Glass . . . the original solid wire glass upon which the Underwriters' Standard was based . . . the standard today by which all others are judged. Available in either hexagonal or Misco wire mesh in types for clear vision or diffusion. Carried in stock by distributors of quality glass everywhere.

Send for Catalog No. 53. Free samples on request.

MISSISSIPPI Glass COMPANY

88 ANGELICA ST. SAINT LOUIS 7, MO.

NEW YORK • CHICAGO • FULLERTON, CALIF.

see our catalog in INDUSTRIAL CONSTRUCTION Mill or write for copy

WORLD'S LARGEST MANUFACTURER OF ROLLED, FIGURED AND WIRED GLASS

ESTIMATING CONSTRUCTION COSTS

Just Published!

Here are the practical considerations you need to know to make accurate estimates on engineering projects — the understandable methods and helpful data you need for realistic, sound estimating. Each major type of construction is covered in detail not only on materials, labor, and equipment, but on overhead and profit as well. Over 100 time-saving tables help you make speedy, accurate estimates. **By R. L. Peurifoy, Professor of Civil Engineering, A & M College of Texas. 350 pp., illus., $7.50**

THE BUSINESS OF HOME BUILDING

A Manual for Contractors

This handy manual gives the contractor and small home builder the information he needs to set up an efficient business organization that saves time and trouble, and helps build profits as well as homes. It shows you how to decide if a building project is a safe venture . . . what steps to take to ensure a profitable return on your investment. Describes every aspect of the business side of home building plus scores of tips, short cuts, and techniques to help you avoid costly business errors. **Edited by B. Kenneth Johnstone, Head of the Dept. of Architecture, Carnegie Institute of Technology, and Charles E. Joern, Realtor and Builder. 289 pp., illus., $5.00**

LEGAL GUIDE FOR CONTRACTORS, ARCHITECTS AND ENGINEERS

Just Published!

A handy legal guide to forewarn you of common pitfalls in your field . . . help for preventing costly lawsuits. Describes 83 situations reviewing typical problems arising out of construction contracts. Easily understood by the layman, it gives facts and contract provisions, cites cases to sustain principles. **By I. Vernon Werbin, Member of N. Y. Bar and Licensed Professional Engineer, 374 pp., $5.00**

LIVING MATHEMATICS

Written in a light style, with detailed explanations this is just the book for those who never got beyond arithmetic and now wish an introduction to more advanced mathematics in convenient, self-study form; and for those whose acquaintance with algebra or trigonometry is slight and who wish to review and then proceed to calculus and number theory. **By Ralph S. Underwood and Fred W. Sparks, Professors of Mathematics, Texas Technological College. Second Edition, 336 pp., $5.50**

SEE THESE BOOKS 10 DAYS FREE

McGraw-Hill Book Co., 330 W. 42nd St., NYC 36

Send me the book(s) checked below for 10 days examination upon approval. In 10 days I will remit for book(s) I keep, plus few cents for delivery, and return unwanted book(s) postpaid. (We pay for delivery if you remit with this coupon; same return privilege.)

☐ Peurifoy—
ESTIMATING CONSTRUCTION COSTS—$7.50
☐ Johnstone & Joern—
THE BUSINESS OF HOME BUILDING—$5.00
☐ Werbin—**LEGAL GUIDE—$5.00**
☐ Underwood & Sparks—**LIVING MATH—$5.50**

(Print)
Name .....
Address .....
City .....Zone....State .....
Company .....
Position NR-3-19

This offer applies to U. S. only

GET STEAM FROM A COLD START IN 2 MINUTES

With a LITTLEFORD "Kwik-Steam" VAPOR-CLARKSON GENERATOR

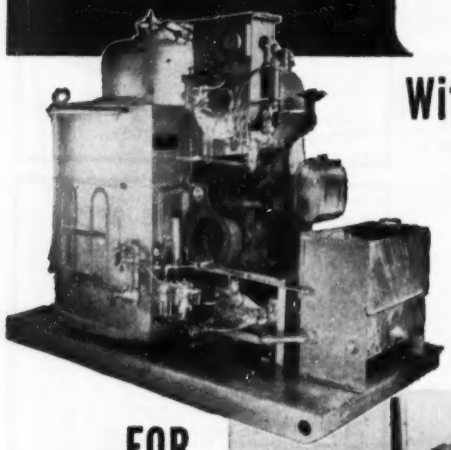

FOR ASPHALT PLANTS

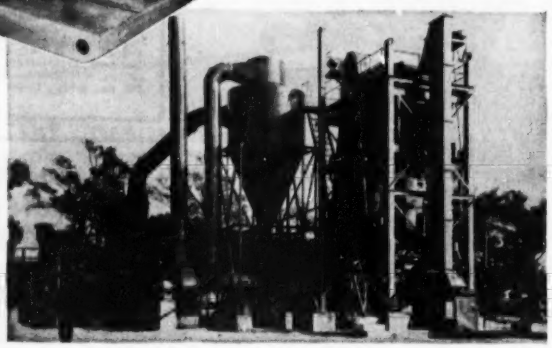

This complete package of steam is small, compact and fast when it comes to producing steam for Asphalt Plants. Steam in 2 minutes time from a cold start is what this "Kwik-Steam" Generator will produce. There is ample supply of steam to heat asphalt sufficiently to unload tank cars, to heat asphalt storage tanks, to heat rotary dryers, to open large ram doors at the bottom of pug mixing mill, to operate steam pump and keep materials in pug mill at right mixing temperatures. These are a few of the applications found practical and economical wherever high pressure steam is needed at Asphalt Plants. "Kwik-Steam" Generators are made in sizes from 20 to 165 BHP. Saves at least 50% in fuel and labor in operation. Send for bulletin on Asphalt Plants.

LB LITTLEFORD

LITTLEFORD BROS., INC. • 415 E. PEARL ST. • CINCINNATI 2, OHIO

Ill., 1 story bsmnt., East Side Junior High School. $900,000. CD 8/21/51.

Puerto Rico, San Juan—SUPREME COURT—Dpt. P. Wks., San Juan, 2 story Supreme Court Bldg., Munoz Pivera Park, near here, incl. access streets, sidewalks, parking spaces. $700,000.

▲ **Alta., Edmonton**—SCHOOL—Edmonton High School Bd., Edmonton, High school, 105 St. and 76 Ave. $2,850,000.

B. C., Vancouver—SCHOOL—Vancouver School Bd., plans by E. D. King, school bd. archt., John Oliver School addn. $500,000. CD 1/15/47.

▲ **Ont., London**—HOSPITAL—Ontario Dpt. Health, Queens Park, Toronto, 500-bed Ontario Hospital addn. $3,000,000.

Ont., Ottawa—SCHOOLS—Public School Bd., 330 Gilmour St., plant by Hazelgrove & Lithwick, 53 Queen St., school, St. Laurent Blvd., south of Montreal Rd., $500,000; plans by W. C. Sylvester, 46 Elgin St., Alta Vista School addn., $300,000.

COMMERCIAL BUILDINGS

▲ **Calif., San Bruno**—HOMES—American Lumber Mills, Burlingame, 2550 homes on site and Skyline Blvd. and Junipero Serra Blvd., incl. commercial developments. $15,000,000.

D. C., Wash.—PARISH HALL, etc.—Church of Annunciation, 39 St. and Mass. Ave. N.W., plans by Maurice S. May, 1223 Connecticut Ave. N.W., and Philip H. Frohman, 1741 DeSales St. N.W., parish hall, school and convent. $650,000.

Ind., Indianapolis—HOUSING—Citizens Housing Corp., 136 N. Delaware St., low-cost housing. $750,000.

▲ **Md., Bethesda**—OFFICE—Sterling & Scull, Inc., Newell Rd., Silver Spring, office to bridge Baltimore & Ohio right-of-way at Wisconsin Ave. $3,000,000.

▲ **Mich., Marysville**—RESIDENTIAL DEVELOPMENT—Marysville Development Co., Sixth St., residential development on 80 acres, Michigan and Minnesota Aves. $1,000,000.

▲ **Mo., Kansas City**—APARTMENT—J. E. Dunn Constr. Co., 929 Holmes St., plans by Swanson, Terney & Brey, 216 E. 10 St., 2nd phase, Dunlieth Towers, 10 story apartment, 46 and Jefferson Sts., $1,250,000.

N. Y., New York—OFFICE—Rockefeller Center, Inc., 50 Rockefeller Plaza, Zone 20, plans by Carson & Lundin, 50 Rockefeller Plaza, Zone 20, office bldg. alterations, 600 Fifth Ave. $600,000. CD 1/27/50.

O., Cleveland—OFFICE—Union Carbide & Carbon Corp., 30 E. 43 St., New York 17, N. Y., plans by Osborn Eng. Co., consult. engrs.-archts., 7016 Euclid Ave., 1 and 2 story sales office for five company divisions. $500,000.

▲ **O., Oxford**—HOSPITAL—McCullough Memorial Hospital, Bd. Trustees, Oxford, plans by Hannaford & Sons, Dixie Terminal Bldg., Cincinnati, McCullough Memorial Hospital. $1,500,000. CD 9/22/48.

Pa., Jeannette—OFFICE—West Penn Power Co., 14 Wood St., Pittsburgh, plans by Hoffman & Crumpton, 700 Century Bldg., Pittsburgh, 1 and 2 story, brick, block, steel frame, office-warehouse-garage. $500,000.

▲ **Pa., Lansdale**—RESIDENCES—Lansdale Acres, c/o Jeffery & Ralph Robinson, 2601 Parkway, Phila., residential development. $2,250,000.

Pa., Phila.—CHURCH, etc.—Immaculate Heart of Mary Roman Catholic Church, Rev. Joseph M. Sullivan, pastor, 29 St. and Allegheny Ave., plans by Gleeson & Mulrooney, 1612 Market St., church, school, convent and rectory. $500,000.

S. C., Union—CHURCH—First Baptist Church, Union, plans by Heward Singley, 1845 Assembly St., Columbia, church, $500,000.

▲ **Tex., Dallas**—DORMITORIES, etc.—Southern Metho- Bd. Trustees, Beaumont, plans by Stone & Pitts, 1872 Calder Ave., 5 story west wing addn. to hospital. $1,500,000. CD 2/25.

▲ **Tex., Dallas**—DORMITORIES, etc.—Southern Methodist University, Perkins School of Theology, Mocking-

GUNITE Since 1915 CONCRETE SAND AND CEMENT "Placed by Air"

38 YEARS OF EXPERIENCE PLUS—Hundreds of nationally known clients is evidence of our engineering and construction ability to produce "Gunite" concrete construction at a lower overall cost.

Send for specifications and bulletins—no obligation.

See our catalog in Sweets

GUNITE CONCRETE & CONST. CO.
ENGINEERS — CONTRACTORS
1301 WOODSWETHER RD., KANSAS CITY, MO
CHICAGO — ST. LOUIS — MINNEAPOLIS
DENVER — HOUSTON — NEW ORLEANS

DEPENDABLE OHIO LOCOMOTIVE CRANES

DIESEL • GASOLINE • ELECTRIC • STEAM



25 TO 90 TONS CAPACITY

THE OHIO LOCOMOTIVE CRANE CO.
BUCYRUS, OHIO

Hayward Buckets

Use this Class "E" Clam Shell Bucket for handling crushed stone, gravel, sand and other bulk materials.

THE HAYWARD CO., 48-50 Church St., N. Y.

bird Lane, plans by Mark Lemmon, 1210½ Main St., Dr. C. C. Selecman Dormitory, $400,000; Dr. Umphrey Lee Dormitory, $400,000. CD 1/28/46; gymnasium-utility bldg., $1,500,000. CD 12/11.

Tex., Houston—SHOPPING CENTER—Leo F. Corrigan, Mercantile Bank Bldg., Dallas, plans by Wyatt C. Hedrick, engr.-archt., 5201 Fannin St., shopping center addn., Humble Rd. $500,000. CD 3/18/48.

▲ **Tex., San Antonio**—OFFICE—Straus-Frank Co., 301 S. Flores St., plans by Atlee B. & Rob. M. Ayres, Transit Tower, 1 and 2 story, 220x560 ft. brick, stone, hollow tile walls, office warehouse, Coliseum Dr. between E. Houston and Commerce Sts. $1,000,000. W. E. Simpson Co., 945 Milam Bldg., consult. engr.

Va., Richmond—STORE—F. W. Woolworth Co., Woolworth Bldg., New York, N. Y., plans by Carneal & Johnston, Atlantic Life Bldg., department store. $500,000.

Wash., Des Moines—APARTMENT RESIDENCE HALL—Wesley Gardens, Des Moines, 6 story, 90-apartment residence hall, $509,000.

▲ **Wis., Milwaukee**—SHOPPING CENTER—Froedtert Enterprises, 810 N. Plankington St., Zone 3, plans by Grassold & Johnson & Assoc., 734 N. Jefferson St., Zone 2, Southgate Shopping Center addn. $6,000,000. CD 2/8.

▲ **Wis., Racine**—SHOPPING CENTER—Durand Co., Inc., 306 5 St., plans by Hans M. Geyer, 1419 Washington Ave., and J. Mandor Matson, 610 Main St., 20 to 25 unit shopping center. $2,000,000.

▲ **Alta., Calgary**—BANK and OFFICE—Bank of Toronto, King and Bay Sts., Toronto, Ont., 6 or 7 story bank and office bldg., 8 Ave. and 4 St. $1,000,000.

▲ **Ont., Toronto**—HOSPITAL—Lakeshore Hospital Assn., Dr. A. E. Noble, chn., Long Branch, plans by A. Martineau, 134 Clarence St., Kingston, 200-bed hospital, Evans Ave. $3,000,000. CD 9/23.

INDUSTRIAL BUILDINGS

▲ **Okla., Pryor**—PLANT—Midwest Carbide Corp., Keokuk, Ia., calcium carbide plant. $1,000,000. CD 4/8.

▲ **Pa., Pittsburgh**—LABORATORY—U. S. Steel Corp., 71 Broadway, New York 4, N. Y., plans by Charles M. Stotz, Bessemer Bldg., Pittsburgh, research laboratory, center comprising main laboratory bldg., experimental engineering shop and industrial process development bldg., near here. $2,500,000. Edward Stotz, Jr., Bessemer Bldg., consult. engr.

▲ **S. C., Charleston**—PLANT—West Virginia Pulp & Paper Co., North Charleston, plant addn. $3,000,000.

▲ **S. C., Florence**—PLANT—Alma Trailer Co., Alma, Mich., mfg. plant. $1,000,000.

▲ **Tex., Fort Worth**—POWER UNIT—Texas Electric Service Co., 406 W. 7 St., Electric Bldg., 115-000 kw power unit, $16,500,000.

▲ **Tex., Orange**—CHEMICAL PLANT—Spencer Chemical Co., 1004 Baltimore St., Kansas City, Mo., chemical plant. $1,000,000.

▲ **Wis., Milwaukee**—POWER PLANT UNIT—Wisconsin Electric Power Co., 231 W. Michigan St., Zone 3, 3rd unit of power plant, Oak Creek. $23,600,000, incl. equip. CD 11/20/50.

▲ **Alta., Calgary**—PLANT—Hilton Bros. Ltd., 680 Wall St., Winnipeg, Man., corrugated box and paper plant. $1,100,000.

▲ **Alta., Edmonton**—LUBRICATING OIL PLANT—Imperial Oil Ltd., Church and King Sts., Toronto, Ont., lubricating oil plant, incl. solvent extraction plant, solvent dewaxing plant, equip. for finishing and packing lubricant; expanding existing refinery laboratory. $10,000,000.

▲ **B. C., Burnaby**—TRUCK TERMINAL, etc.—Brookwood Terminal Ltd., 520 S. 19th St., Harrisburg, Pa., U.S.A., and Ferguson Truck & Equipment Co., Ltd., 2015 Main St., Vancouver, truck terminal and combined truck and rail terminal on 44-acres. $4,000,000.

▲ **B. C., Burnaby**—WAREHOUSE—Canada Safeway Ltd., 840 Cambie St., Vancouver, grocery chain warehouse, 40-acre tract. $15,000,000. CD 12/7/50.

▲ **Ont., Sarnia**—CONTROL LABORATORY—Imperial Oil Ltd., Dr. J. L. Hugget, supt., Sarnia, control laboratory mechanized packaging plant and mechanical shops. $6,000,000. CD 11/17/50.

UNCLASSIFIED

Ala., Troy—NATURAL GAS SYSTEM—City, City Hall, natural gas system. $900,000.

▲ **Ill., Herscher**—GAS STORAGE PROJECT—Peoples Gas Light & Coke Co., 132 S. Michigan Ave., Chicago, Zone 3, natural underground gas storage project. $17,000,000.

▲ **O., Cleveland**—SWIMMING POOLS—City, City Hall, Zone 14, plans by Damon, Worley, Samuels & Assoc., Engineers Bldg., Zone 14, ten 42x75 ft., 3 to 5 ft. 100,000 gal. water capacity swimming pools, with surrounding concrete aprons, $1,000,000. Robert L. Svoboda, 714 Fox Bldg., Detroit, Mich., consult. archt. CD 11/7.

▲ **Oklahoma**—GAS PIPE LINE—Oklahoma Natural Gas Co., 401 N. Harvey St., Oklahoma City, 51 mi. natural gas pipe line from near Sapulpa to 4 mi. southeast of Pryor. $1,500,000. (Owner will buy the pipe from A. O. Smith Corp., 3533 N. 27 St., Milwaukee, Wis.). CD 9/3.

▲ **Texas**—PRODUCTS PIPE LINE—H. W. Bass & Sons, Inc., Magnolia Bldg., Dallas, 152 mi. 4-to 6-in. products pipe line from area Freer to Corpus Christi, $1,600,000.

▲ **Ont., Toronto**—RACE COURSE—Ontario Jockey Club, 2 King St. E., plans by Earle C. Morgan, 906 Yonge St., race course between Hy. No. 27 and Concession 4 south of Malton Rd. $6,000,000. CD 9/24.

FOUNDATION CONSTRUCTION

CAISSONS
SHAFTS
DRILLED AND UNDERREAMED
PIERS

SPECIAL DRILLING PROBLEMS

Wire or phone for a quotation on your next foundation job — ANYWHERE IN THE WORLD

McKINNEY
DRILLING COMPANY
NACOGDOCHES, TEXAS
Phones: 1195 - 1053 • P. O. Box 190

Are YOU trying to push water through LINES LIKE THIS?

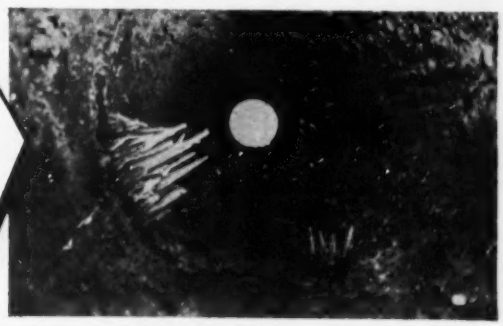

No need to worry about it anymore!

You can recondition your old cast iron or steel line very economically...at much less than the cost of a new pipe line.
AND...*without appreciably disturbing present service!*
Interior tuberculation and incrustation is removed by patented processes used by PIPE LININGS, INC....and a new, continuous, smooth surface cement mortar lining is applied...with only momentary interruption to install by-pass lines.

If your lines look like this ...find out how you can get new pipe performance at much less than the cost of new line. Write TODAY!

CEMENT MORTAR LINING WILL...
Protect against discoloration and contamination
Protect against corrosion
Improve flow coefficients
Prevent leakage
Reduce maintenance costs
Reduce pumping costs

After reconditioning

TATE PROCESS USED on Line 4" to 16"
CENTRILINE PROCESS Used on Line 16" to 144"
Consult our hydraulic engineers ...they are at your service.

PIPE LININGS, Inc.
A subsidiary of
American Pipe and Construction Co.
4675 Firestone Blvd.
South Gate, California

PIPE LININGS, INC.
4675 Firestone Blvd., South Gate, Calif.
Please send complete information on how we can obtain new pipe line performance from our old line

Name _____ Title _____
Company _____
Address _____
City _____ Zone ____ State _____

"I could see the corpsman kneeling over me. The blood plasma was running down through a tube into my arm and he said everything was going to be O.K. I was walking across an enemy mine field in Seoul when one exploded and a piece of shrapnel caught me in the leg.

" 'Got enough of that stuff?' I asked him, pointing to the blood. 'I guess we never have enough,' he said, 'but you can thank *somebody* for this pint.'

"How do you thank 'somebody' for blood? For saving your life? When I got back home, I discovered the answer at my local blood donor center. There's only *one* way to say thanks—by giving some of your own blood."

"How do you thank 'somebody' for Blood?"

Yes, all kinds of people give blood—for all kinds of reasons. But whatever *your* reason for giving blood, this you can be sure of: Whether your blood goes to a combat area, a local hospital, or for Civil Defense needs—this priceless, painless gift will some day save an American life!

Business Executives!

√Check These Questions!

If you can answer "yes" to most of them, you—and your company—are doing a needed job for the National Blood Program.

- ☐ Have you given your employees time off to make blood donations?
- ☐ Do you have a Blood Donor Honor Roll in your company?
- ☐ Have you set up a list of volunteers so that efficient plans can be made for scheduling donors?
- ☐ Have you arranged to have a Bloodmobile make regular visits?
- ☐ Has your management endorsed the local Blood Donor Program?
- ☐ Have you informed employees of your company's plan of co-operation?
- ☐ Was this information given through Plant Bulletin or House Magazine?
- ☐ Has your company given any recognition to donors?
- ☐ Have you conducted a Donor Pledge Campaign in your company?

Remember, as long as a *single* pint of blood may mean the difference between life and death for *any* American . . . the need for blood is *urgent!*

Give Blood Now—Call Your Red Cross Today!

National Blood Program

Bids—Low Bids—Contracts—Second Section

MIDDLE ATLANTIC

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
STREETS AND ROADS
March 31 New Jersey

BIDS ASKED—BUILDINGS

▲† **Del., Newark**—PLANT, etc.—B.A. 3/23—Chrysler Corp., Delaware Tank Plant, Newark, Del., tank equipping plant and grading, $1,600,000. Extended date. Albert Kahn Associated Architects & Engineers, Inc., New Center Bldg., Detroit, Mich., archt. and engr. CD 2/18.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ **NEW JERSEY**—N. J. Hy Auth., State Hy. Office Bldg., 1035 Parkway Ave., Trenton,
Tully & DiNapoli, P.O. Box 145, Flushing, N.Y., CA $4,059,316 structures grading, drainage, paving Sect. 4 of Garden State Parkway from Mill Rd. to Nye Ave., Contr. N. 15, Union and Essex Counties. Bids Feb. 19, awarded Mar. 5. CD 3/3, under LB.

▲ **NEW JERSEY**—N. J. Hy. Auth., State Hy. Dpt., Office Bldg., 1035 Parkway Ave., Trenton,
George M.Brewster & Son, 275 W. Ft. Lee Rd., Bogota, N. J. LB $2,794,811, stabilization, grading, paving, drainage, foundations for Sect. 7 of Garden State Parkway from Pinebrook Rd. to W. Front St., Contr 19, Monmouth Co. Bids Mar. 26. CD 2/11.

▲† **Auf Der Heide—Aragona,** 5510 Jackson St., West New York, N. J., LB, $2,227,250. air ship overhaul repair shop, Naval Air Station, NOY 76366, Spec. 37106, LAKEHURST, N. J. Dpt. Navy, Phila. Naval Base, Phila., Pa. Bids Dec. 15. CD 11/5.

▲† **James D. Morrissey, Inc.,** 9119 Frankford Ave., Phila., Pa., LB $2,709,688, airfield paving, utilities, at Naval Air Station, Runway 15-33, NOY 73199, Spec. 34378, WILLOW GROVE, PA. Dpt. Navy, Phila. Naval Base, Phila., Pa. Bids Feb. 26. CD 2/4.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Franconia Village Apartments,**c/o Martyn N. Weston, archt., 44 Court St., Brooklyn 2, N. Y. Owner Builds. $2.000,000. Three 6 story APARTMENTS, Kessena Blvd. and 45 Ave., FLUSHING, N. Y.

▲ **Gens-Jarboe, Inc.,** 101 Park Ave., New York 17, N. Y. CA $1,800,000. DORMITORY to be called F. W. Olim Hall, 69 St. and York Ave., NEW YORK, N. Y. Cornell University Medical College, 445 E. 69 St., New York 21, N. Y. CD 5/7.

▲ **Caye Constr. Co. Inc.,** 356 Fulton St., Brooklyn 1, N. Y. LB $4,644,800, general constr.;
H. Sand & Co., Inc., 291 Broadway, New York 7, N. Y., LB $623,100, heating and ventilating;
Lipsky & Rosenthal, Inc., Lexington Ave. and 115 St., New York 29, N. Y., LB $536,136, plumbing for Hammell HOUSES, Proj. No. NY 5-27 in area bounded generally by Freeway, Hammell Blvd., Beach 81 St., Rockaway Beach Blvd., and Beach 86 St., Queens Boro, ROCKAWAY, N. Y. New York City Housing Auth., 63 Park Row, New York 28, N. Y. Bids Mar. 3. CD 2/12.

▲ **John McShain,** 1750 N. Olden Ave., Trenton, N. J., CA, $3,600,000, SHOPPING CENTER, RESTAURANT, PROFESSIONAL bldg., parking area, PRINCETON, N. J. Clearview Assoc., 145 Harrison St., Princeton, N. J. Bids Dec. 15. CD 12/11.

▲ **Millside Homes, Inc.,** Roebling, N. J., Separate Contracts, $1,350,000, RESIDENTIAL DEVELOPMENT, Chester Ave. and Greenwood St., RIVERSIDE, N. J.

▲ **Westover Corp.,** c/o Herbert C. Anderson, archt., 400 DeKalb St., Norristown, Pa. Separate Contracts. $6,000,000 RESIDENTIAL DEVELOPMENT, Schuylkill and Juanita Rd., JEFFERSONVILLE, PA.

▲ **John McShain,** 17 and Spring Garden Sts., Phila., Pa. CA. $1,892,200, general contract Morris E. Leeds Junior HIGH SCHOOL; CA. $992,200, William Dick Elementary SCHOOL and paving, PHILA, PA. Bd. Educ., 21 and Winter Sts., Phila., Pa. Bids Feb. 11. CD 2/19, under LB.

▲ **J. J. Cannon,** 305 S. Chester Park, Glenolden, Pa., Separate Contracts. $3,510,000. RESIDENTIAL DEVELOPMENT, Michell St., RIDLEY PARK, PA.

SOUTH

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
STREETS AND ROADS
April 24 Georgia

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ **Southeastern Contg. Co. & C. E. Adams & Co.,** 3700 10 Ave. N., Birmingham, Ala., CA. $1,749,271, natural gas sys., ALBERTVILLE, ALA. Marshall Co. Gas District, Court House, Albertville, Ala. Bids Feb. 18. CD 2/26, under LB.

▲ **Keller Constr. Co.,** 7900 Palm St., New Orleans, La. CA $2,342,500. constr., comoletion of enlargement water treatment plant, Shrewsbury, NEW ORLEANS, LA. East Jefferson Waterworks Dist. No. 1, 3600 Jefferson Hy., New Orleans, La. CD 1/30, under LB.

BUILDINGS

LOW BIDS AND CONTRACTS

▲† **Gust K. Newberg Constr. Co.,** 2040 N. Ashland St. Chicago, Ill., LB $2,017,000, construct TB-NP BUILDING 90, AUGUSTA, GA. Veterans Administration, Munitions Bldg., Wash., D. C. Bids Mar. 10. CD 1/21.

▲ **Foster Wheeler Corp.,** 165 Broadway, New York, N. Y. CA. $20,000,000. Design and construct chemical PLANT, MEMPHIS, TENN. W. R. Grace & Co., 7 Hanover Square, New York, N. Y. CD 8/20.

MIDDLE WEST

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
STREETS AND ROADS
April 10, 14 Ohio

BIDS ASKED—BUILDINGS

▲ **Mich., Saginaw** — HOUSING — B.A. 7/1—Saginaw Housing Comn., Admin. Office, Harold St., 236 low-income housing units, Fuller and Norman Sts. $3,-000,000. Leinweber, Yamasaki & Hellmuth, 112 Madison Ave., Detroit, Zone 26, archts. (Correction—architects.) CD 1/23.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ **Anderson Bros. Corp.,** P.O. Box 2591, Houston, Tex. CA. Est. $3,000,000. 195 mi. natural gas line from Ironwood, to Cook, MICHIGAN. Lake Head Pipe Line Co., c/o contractor.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Duffy Constr. Co.,** Terminal Tower, Cleveland, O. CA. $7,500,000. 96,000 sq. ft. PARCEL POST annex and GARAGE, 300-truck GARAGE and railroad loading facilities W. 9th St. an lakefront for lease to United States Post Office, Cleveland, O., CLEVELAND, O. New York Central System, W. 3 St. and St. Clair Ave., Cleveland, O. Awarded Feb. 27. CD 7/31.

▲† **Butler Mfg. Co.,** 7400 E. 13 St., Kansas City, Mo, CA. $796,790, prefabricated steel bldgs.;
Continental Electric Co., Inc., 7374 Reading St., Cincinnati, O., CA. $104,870 each ($209,740 total) wiring and equip.;
I. T. E. Circuit Breaker Co., 19 and Hamilton Sts., Phila., Pa., CA $73,280, electrical work;
Kolinski Concrete Co., 344 E. Stewart St., Milwaukee, Wis., CA. $4,405,650, mixing and delivering ready-mixed concrete;
Taylor-Wheless Co., Hy. 80 W., Jackson, Miss., CA $3,990,700, general site grading, drainage, at Gaseous Diffusion PLANT (Subcontractors under Peter Kiewit Sons' Co., P.O. Box 268, Portsmouth, O.) for Atomic Energy Comn., 1901 Constitution Ave. N. W. Wash. 25, D. C., PIKETON and WAKEFIELD, O. CD 8/13, under CA.

▲ **Hunkin-Conkey Constr. Co.,** 1740 E. 12 St., Cleveland, O. CA est. $10,000,000. limestone PLANT, incl. crushing, screening, reclaiming facilities, stockpiling, loading sys., conveyor sys., pumping facilities, etc. all on Lake Huron, near ALPENA, MICH. Presque Isle Corp., c/o Jones & Laughlin Steel Corp., 3289 Beaufait St., Detroit, Mich.

WEST OF MISSISSIPPI

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
BRIDGES
March 27 Minnesota
STREETS AND ROADS
March 27 Minnesota

BIDS ASKED—BUILDINGS

▲ **Tex., San Antonio**—HOSPITAL—B.A. 4/15—Santa Rosa Hospital, Houston and Santa Rosa Sts., 5 story, 120-room hospital addn., 2 elec. elevators. $2,000,-000. Phelps & DeWees & Simmons, 1501-6 Majestic Bldg., archts. Frank T. Drought, 117 W. Pecan St., and Gerard M. Baker, 1501 Majestic Bldg., engrs. CD 1/30.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Tieso & Kostka,** 1650 Carroll Ave., St. Paul, Minn. CA approx. $2,000,000. 125 HOMES 1 mi. south of MOUNTAIN IRON, MINN. Oliver Iron Mining Co., Wolvin Bldg., Duluth, Minn.

▲ **Oliver Iron Mining Co.,** Div. U. S. Steel Co., Wolvin Bldg., Duluth, Minn. Owner Builds. $60,000,000. Iron benficiation PLANT, near TWO HARBORS, MINN.

▲ **Fausett Realty Co.,** 215 Louisiana St., Little Rock, Ark. Owner Builds. $6,000,000. 600 RESIDENCES, LITTLE ROCK, ARK.

▲ **Bralei Homes, Inc.,** 5 and Vine Sts., Little Rock, Ark. Owner Builds. $3,200,000. 400 RESIDENCES, LITTLE ROCK, ARK.

For "quick-dry"... specify...

GRIFFIN
WELLPOINT CORP.
881 East 141st Street, New York 54, N. Y.
Hammond, Ind. Houston, Tex. Jacksonville, Fla.
In Canada: Construction Equipment Co., Ltd.
Toronto Montreal Halifax

300 pounds
or
20,000 pounds
each hour
Any Amount • Any Type
BITUMINOUS PATCH MATERIAL
with the Barber-Mixall Greene

THIS FREE BOOK
see your B-G distributor or write
Barber-Greene
AURORA, ILLINOIS, U.S.A.

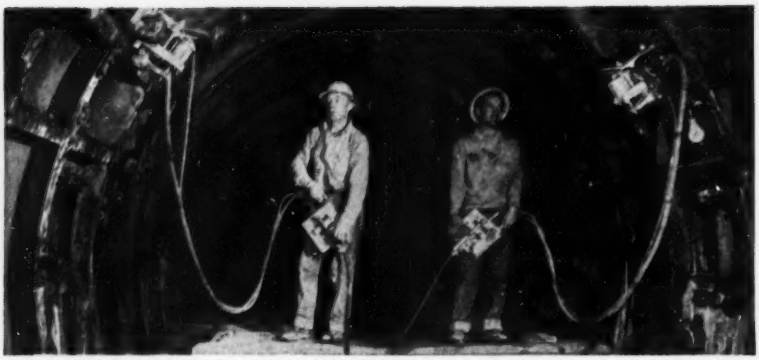

VIBER EXTERNAL VIBRATORS with quick-acting mounting clamps prove very effective in producing unusually smooth concrete tunnel linings.

Form Vibration Speeds Tunnel Lining, Gives Better Concrete, Smoother Finish

Tunnel lining contractors now use VIBER external vibration on movable steel forms to speed production of denser, more uniform concrete and a finished surface almost as perfect as the form itself. This gives maximum capacity with minimum frictional losses in diversion tunnels, storm drains, or other water-carrying structures. Generally one vibrator is clamped on each side of the steel form (which transmits the vibration) at a height convenient for clamping and moving as work progresses. One USBR project engineer reported transmission of vibration "throughout length of the slope—20 to 25 feet." Vibrators clamped near upper end of the advancing slope may be turned on briefly to help settling while concrete is deposited, after which a vibrating time of ten to forty seconds, depending on conditions, will consolidate it and produce the surface required.



AIR-OPERATED MOUNTING CLAMP and operating valve provide a quick and convenient means of clamping the external vibrator on the form wherever a plate or angle is accessible. Valve (left) turns the vibrator on and off, and operates the air piston to provide a clamping force of 1800 pounds on the adjustable jaws.

UNLOADING BULK CEMENT is one of many other successful applications of external vibration. One large oil well cementing company uses vibration to unload bulk cement in over fifty plants, some handling as much as 500,000 sacks per month. If you handle or package bulk materials, you can probably use external vibration to good advantage.

EXTERNAL VIBRATION is another field in which VIBER has pioneered in its continuing search for new knowledge and techniques in the useful application of vibration. For further information on VIBER'S complete line of internal and external vibrators, write your nearest authorized distributor or **VIBER COMPANY, 726 South Flower St., Burbank, California.** Dept. 53

▲ **Wallin, Dickey & Rich Lumber Co.,** West Memphis, Ark. Owner Builds. $3,000,000. 312 RESIDENCES, WEST MEMPHIS, ARK.

▲ **Ebasco Services, Inc.,** 2 Rector St., New York 6, N. Y. CA. $7,000,000, design and construct 25,000 kw. steam GENERATING unit, MANDAN, N. D. Montana-Dakota Utilities Co., 831 Second Ave. S., Minneapolis, Minn.

▲ **Ebasco Services, Inc.,** 2 Rector St., New York 6, N. Y. CA. Approx. $2,000,000. design and construct 8000 kw. gas turbine GENERATING PLANT, WILLISTON, N. D. Montana-Dakota Utilities Co., 831 Second Ave. S., Minneapolis, Minn.

▲ **Southwest Constr. Corp.,** 5100 E. 17 St., Oklahoma City, Okla., LB $1,580,000, Thomas A. Edison Junior HIGH SCHOOL, TULSA, OKLA. Bd. Educ., Independent School Dist. 1 of Tulsa Co., 410 S. Cincinnati St., Tulsa, Okla. Black & West, Tri-State Insurance Bldg., Tulsa, Okla., archts. Bids Mar. 2.

▲ **Hudson Eng. Corp.,** 2711 Danville St., Houston, Tex. CA $2,750,000. REFINERY, near BOWIE, TEX. Bowie Gasoline Co., Bowie, Tex. CD 3/4.

▲ **O'Rourke Constr. Co.,** Box 5384, Dallas, Tex., CA $1,500,000. BANK and OFFICE addns., alterations, DALLAS, TEX. First National Bank, 1401 Main St., Dallas, Tex. George L. Dahl, 2101 N. St. Paul St., Dallas, Tex., archt. CD 5/15/51.

FAR WEST

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
BRIDGES
April 1 California
STREETS AND ROADS
April 1 California

BUILDINGS

LOW BIDS AND CONTRACTS

▲† **W. W. Clyde & Co.** and **Jacobsen Contr. Co.,** 421 W. 13th South St., Salt Lake City, Utah, CA $1,647,240, constr 100 AMMUNITION MAGAZINES (Igloo Type) and bit. surf. Blocks 612 and 614, Tooele Ordnance Depot, TOOELE, UTAH. U. S. Eng., 180 New Montgomery St., San Francisco, Calif. Bids Aug. 28. CD 9/15, under LB.

▲ **Carson Park Builders,** Box 86, Long Beach, Calif., CA, $1,584,100, 198 frame, stucco DWELLINGS, Carsite, Keynette and Shipway Sts., CARSON PARK, CALIF. Carson Park Mutual Homes No. 11, Box 8-6, Long Beach, Calif. Paul J. Duncan, Sherman Oaks, Calif., archt.

CANADA

SOON LETS CONTRACT—BUILDINGS

▲ **N. S., New Glasgow**—HOSPITAL—Aberdeen Hospital Comn., G. R. Saunders, secy., New Glasgow, soon lets contract 5 story, 44x256 ft., T-shaped, 44x100 ft. rear wing hospital, separate 3 story power house and laundry 67x90 ft., underground passage connecting, all rein.-con., frame, brick, stone, $1,800,000. McDougall & Friedman, 1235 McGill College Ave., Montreal, engrs. E. J. Turcotte 1478 St. Catherines St. W., Montreal, Que., archt. CD 3/31/44.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ **Poole Constr. Co., Ltd.,** 2402 2A St. S.E. Calgary, Alta. CA. Est. $5,500,000. dam at Bearspaw for halting winter flooding of Bow River, CALGARY, ALTA. Calgary Power Co., Insurance Exchange Bldg., Calgary, Alta. CD 1/17/52.

▲ **Standard Dredging Co. Ltd.,** East St. John, St. John, N. B. LB. $1,893,005, piers 2 and 2 extensions, St. John Harbor, ST. JOHN, N. B. National Harbors Bd., Parliament Bldgs., Ottawa, Ont. Bids Feb. 27. CD 2/10.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Chemical Constr. Inter-American Ltd.,** Bank of Nova Scotia Bldg., Toronto, Ont., CA. $4,000,000. sulphur PLANT, NIAGARA FALLS, ONT. Noranda Mines Ltd., Bank of Nova Scotia Bldg., Toronto, Ont. Chemical Constr. Inter-American Ltd., Bank of Nova Scotia Bldg., Toronto, Ont., engr. CD 5/8.

▲ **J. S. McLennan,** 71 Bayview Rd., Toronto, Ont., Owner Builds, $3,000,000, defence workers low-priced HOUSING units, TORONTO, ONT.

▲ **Refinery Engineering Ltd.,** 2 Toronto St., Toronto, Ont. CA. Est. $5,000,000. expansion and modernization of REFINERY, REGINA, SASK. Consumer's Co-operative Refineries Ltd., No. 1 Hy., Regina, Sask. CD 7/13/45.

ALASKA

BIDS ASKED—HEAVY CONSTRUCTION

▲† **Alaska, Ketchikan**—B.A. 4/14—City, City Hall, 2 tunnels 4,500 ft. long, rockfill concrete-lined dam, 30x77 ft. power house, addn. etc., at Beaver Falls. $1,616,190. Plans deposit $50. W. D. Shannon & Assoc., Stuart Bldg., Seattle 1, Wash., engrs. CD 1/16/52.

(Proposal Advertisements see pp. 104 to 107)

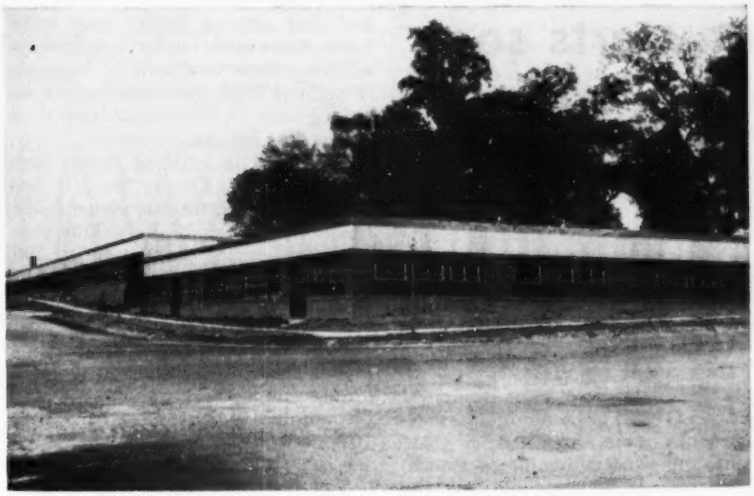

ALUMINUM-TRIMMED, ONE-STORY WAREHOUSE, Silver Spring, Md., built in record time using the Macomber V-Lok method of assembly.

Low cost warehouse, Maryland

By reducing the man-hours of on-site labor, William Richardson, Silver Spring, Md. was able to construct a one-story warehouse for Sterling & Scull, Silver Spring, at a low cost of less than $4.50 per square foot. This low cost is credited to the use of the Macomber V-Lok method for connecting roof frame members and columns (ENR 9-5-51). The method eliminates the use of bolts and rivets, substituting a simple locking device between the parts. The structural steel accounts for 26% of total cost.

A large amount of the labor saving was accounted for by the 59-ton frame, with columns spaced for 20-ft bays, which was constructed in 398 man-hours. Placing the Macomber 20-gage high-rib-section metal decking on the roof framing was also accomplished in the short time of 252 man-hours, including tack-welding of framing members of columns. Financing changes for the owner were held down by the short, four-months, total construction period.

Before it was completed, the warehouse was rented to the U. S. Geological Survey to be used as a map-distribution center, thus office space, reception areas, and other decorating were required. Without these added features, such as acoustical ceilings, asphalt floor, plastering, metal partitions, blinds, and part of the electrical plumbing and heating system, the warehouse could have been constructed for less than $4.00 per square foot. In addition, part of the construction costs, amounting to about 10¢ per square foot, went into a concrete retaining wall to hold up an earth bank at one endge of the property. Macomber added outside aluminum trim without any charge above the base bid for their own steel products put in place.

The following is a breakdown of the warehouse costs by dollars and by the percentage of the total cost accounted for by each item.

Contr. William Richardson, Silver Spring, Md. $179,234

Item	Cost	% of Total Cost
Air compressor service	$924.53	0.516
Hardware	136.91	0.076
Lumber & building supplies	6,557.46	3.659
Concrete	11,814.86	6.592
Telephone service	62.75	0.035
Fuel for motors	17.56	0.010
Reinforcing steel	3,272.23	1.826
Form oil	34.53	0.019
Steel windows & doors	5,193.24	2.897
Brickwork	9,920.00	5.535
Steel lintels & rails	614.69	0.343
Tie wire	26.17	0.015
Nails	166.31	0.093
Conc finishing & common labor	7,090.02	3.956
Gravel	3,176.51	1.772
Electric work & fixtures	18,411.00	10.272
Structural steel (Macomber)	46,767.98	26.093
Bulldozer work	137.00	0.076
Plumbing & heating	18,637.22	10.398
Roofing	9,475.00	5.286
Fence	920.00	0.513
Concrete hardener	581.20	0.324
Tile work	1,067.00	0.595
Electric service	30.45	0.017
Paint	154.81	0.086
Insulation	3,053.60	1.703
Grading	906.19	0.506
Waterproofing	50.00	0.028
Glazing	1,758.47	0.981
Plastering	4,200.00	2.343
Sheet metal work	156.51	0.087
Accoustical ceiling & asphalt floor	9,263.00	5.168
Overhead doors	865.00	0.483
Window cleaning	200.00	0.112
Metal partitions	386.00	0.215
Blinds	402.90	0.225
Water coolers	692.42	0.386
Curbs	436.25	0.243
Burlap	79.80	0.045
Truck charge	50.00	0.028
Sod	295.04	0.165
Roof vents	175.00	0.098
Payroll	10,226.69	5.706
Payroll charges (social security, Md. unempl insur., excise tax)	848.52	0.473

97 Years of Continuous Service and Good for Many Years to Come!

A section of 48" Cast Iron Pipe made by WARREN in 1866 was recently excavated in Woodlawn Cemetary, N. Y. Part of a 2500 foot supply line from the Kensico Reservoir, abandoned in 1943 due to major changes in New York City water distribution system. Cemetary Management decided to salvage this old pipe which was found to be in excellent condition after these years of service under pressures from 60 to 80 pounds psi. It's typical of "WARREN-CAST" Pipe!

Manufacturers of Jobbing Castings Up to 20 Tons in Weight in Gray Iron, Alloy Iron and Meehanite Metal.

Send for literature

WF FOUNDED 1856

WARREN FOUNDRY & PIPE CORPORATION

55 Liberty Street, New York 5, N. Y.

Sales Offices: 55 Liberty St., New York, N. Y.
75 Federal St., Boston, Mass.
183 Sitgreave St., Phillipsburg, N. J.

Plants: Phillipsburg, N.J. Everett, Mass. Mt. Hope, N.J.

"A CENTURY OF PROGRESS AND QUALITY CASTINGS"

Decline in housing starts seen

Ben Hazen warns builders to watch vacancy ratios; other leaders see saturation point nearly reached

The home-building industry has received several warnings lately not to take it for granted that housing starts will maintain their present million-a-year clip indefinitely.

For instance, Ben H. Hazen, president of the U. S. Savings & Loan League, recently warned speculative builders to keep close watch on the vacancy ratio of housing units in their local areas, to avoid getting overextended on new developments.

Hazen doesn't agree with those housing experts who believe that slum-clearance projects and replacement of obsolete houses are going to keep housing starts running at 1,000,000 units a year indefinitely. He predicts that starts will decline somewhere between 15% and 25%, because of the expected reduction in the formation of new families during the 1950's (ENR Feb. 12, p. 17).

• **Real-estate analyst**—Roy Wenzlick has predicted that new houses are going to be harder to sell this year. He believes that in most communities, a real housing shortage no longer exists.

• **Saturation?**—And in New York City early this month, Joseph R. Jones, a vice-president of the big Security-First National Bank of Los Angeles, told a conference of bankers that "possibly we are approaching the point of a saturation of the market."

Jones cited census figures to show that in 1950 the average housing unit served 3.26 people. In 1940, a year when in his opinion supply and demand for housing were in balance, the average unit served 3.53 people.

The current high volume of housing construction, Jones argues, "is predicted largely on the very liberal credit now available." He believes that "the average buyer of a tract house today is buying on a much thinner margin of equity and without the financial responsibility we have thought necessary the past."

To get an idea of how new house sales are going so far this year, ENR asked builders in some key cities about the market for new houses. The survey shows a spotty picture. In some areas, demand is about the same as last year. But in others it is easier; and in one city it is down fairly sharply.

Here are the results of the survey, working from West to East:

• **Los Angeles**—The home-building market is getting more competitive than it has been, but demand for new houses is still strong. Most builders have plans for 1953 at least as big as 1952, and many have bigger plans.

These plans are at least partly in anticipation of: (1) a boost in interest rates on GI and FHA mortgages, making banks more interested in these loans, and (2) lengthening of amortization periods, which would have the effect of reducing monthly carrying charges.

Sales have been lower lately, though. One observer estimates that some individual builders are now selling about half the number of houses they did last year. But completed houses still aren't staying unsold in any quantity. The difference is that tracts used to sell out before construction began. Now they don't. Prices have not been lowered, but there's more competition on quality, and more emphasis on selling.

• **Milwaukee**—Most home builders here expect to put up more houses or apartment units than in 1952. Some feel that even if higher wage rates boost their costs, stiffer competition will force them to absorb it. A couple of builders think that home buyers are getting more for their money now than at this time last year.

• **Chicago**—The building season here is going strong. During the first two months of 1953, the city issued 1,228 residential and multiple-dwelling construction permits, compared with 795 in the same period last year. This may be due partly, some think, to the good construction weather.

Builders and mortagage bankers see little chance of a decline in demand for housing in this area. Some believe the number of starts may be 5% to 10% above 1952. They say that veterans can still get GI mortgages here, though they may have to shop around.

• **Cleveland**—Here home construction is expected to be down about 10% from last year. Total sales of new houses are expected to be down about 25%. Reason: a carryover of unsold houses from last year of somewhere from 1,100 to 2,000 units—with most of the houses priced under $20,000. Builders there expect prices will be no lower than last year. Prices of houses may rise as much as 5% because of expected increases in wage rates.

Builders here find it no trouble to arrange mortgage financing on regular FHA homes. But they do have a hard time finding GI mortgage money.

U.S. Business: the big picture

While total contract awards reported by Engineering News-Record in January and February were setting an all-time high (ENR Mar.5'53,p97), U. S. industry in general has also been rolling along at a very fast pace.

Take a look at these indicators:

• The Federal Reserve Board's index of industrial production hit a postwar high in February.

• According to government figures, more people were working in January than in any previous January in history.

• The nation's steel mills turned out about 18.8 million tons of steel in January and February, a record tonnage for that period.

• Retail sales were more than $14 billion in January, up about $1 billion from January, 1952.

• Bank loans to business now total around $22.7 billion, up about $1.5 billion above this time last year.

There are other signs making for business optimism. The auto industry plans to turn out 600,000 cars this month. And the National Machine Tool Builders Assn. reports that orders for machine tools are increasing.

The picture isn't all rosy. Some economists are worried about the fact that during the last quarter of 1952 business inventories increased about $500 million. That's contrary to the usual trend. They wonder whether this means we aren't producing more than we can use currently. However, last week the Department of Commerce reported that inventories had declined about $100 million during January.

At any rate, nearly all business observers agree that the current high level of production means that 1953 is going to be a very competitive year.

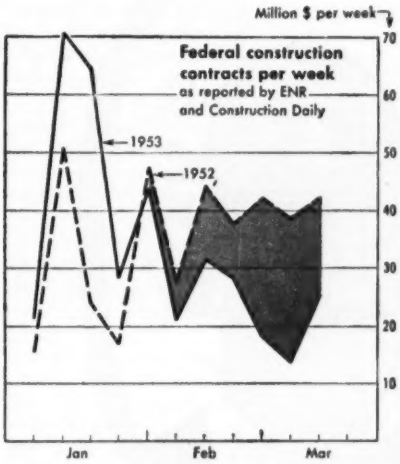

WEEKLY FEDERAL AWARDS fall sharply below '52 weeks in February and March '53

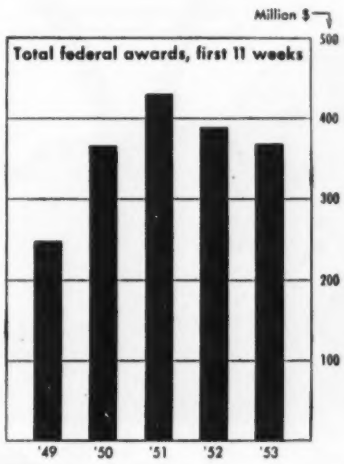

FEDERAL AWARDS for first 11 weeks of '53 are 5% behind '52 period

ENR Business News

Federal awards volume off sharply as result of administration economy plan

The Eisenhower-Dodge economy order, issued last month (ENR Feb. 12, p. 21) has cut sharply into federal construction contract awards. February contracts for federal work totaled only $99 million, 35% less than in the same month of 1952. And volume dropped still more sharply in the first two weeks of March. Federal awards lagged 51% behind the similar 1952 period (left chart).

In spite of the decline since early February, total awards for the first 11 weeks (right chart) are $368 million. That's only 5% behind the corresponding 1952 period, since federal contracts started off January in unusually high volume. It's possible that some projects were rushed in the contract stage, anticipating economy moves by the new administration. The biggest factor in this large January volume was a $40-million contract for construction of an Atomic Energy Commission plant at Richland, Wash.

• **All types hit**—But since the economy order came out, all types of federal work have been slowed down. The order provides that no contracts are to be awarded until they have been cleared with department heads.

Comparing February with January, the biggest declines have been in earthwork and waterways contracts, federal highway awards, and federal housing contracts.

Airport contracts, the largest single item in 1953 federal awards, dropped 27% in February from average weekly volume in January. Lately, airport awards have dropped even more sharply.

PNYA reports:

Tunnels, bridges, help offset air, bus port deficit

The six tunnels and bridges operated by the Port of New York Authority are providing the bulk of the authority's revenues. That's indicated by the financial report for 1952, published last week.

The authority took in about $53.8 million in revenue last year, up about 7% from the year before. About 70% of this was provided by the six tunnels and bridges, which increased their revenues about 5.5% over 1951. Howard S. Cullman, authority chairman, reported that the tunnels and bridges were used by more than 73,000,000 vehicles in 1952, an 8.3% gain over 1951. Average toll per vehicle was lower because of greater use of commutation tickets and a higher proportion of passenger cars.

However, the four airports which the authority runs, and its big bus terminal on Manhattan's West Side failed to make enough to pay debt service requirements. The result is that the authority's reserve funds decreased by about $2 million during the year. They now total about $31 million.

• **$550 million**—But Cullman is confident that the authority will be able to get financing for future plans. He said last week that PNYA is now working on or considering projects which will require about $550 million of capital funds in the next 10 years, in order "to keep pace with the constantly expanding terminal and transportation requirements of land, sea and air traffic in the metropolitan region."

The authority is now working on a $90-million third tube for the Lincoln Tunnel, to take care of increasing traffic to and from New Jersey and Manhattan.

The four airports run by PNYA—La Guardia, Newark, New York International, and Teterboro—took in about $7.9 million in revenue, up almost 12% over 1951 to a new high. But after paying much higher operating expenses, the airports ran $1.2 million short of meeting debt service charge. One reason for this deficit was that Newark Airport was closed or operating on a limited basis for nearly the whole year, because of the tragic series of plane crashes in nearby Elizabeth, N. J.

• **More buses**—PNYA said that its Manhattan bus terminal also failed to meet debt service charges. However, it took in about $2.3 million, of which about 59% was paid by tenants and concessionaires, rather than bus companies. Its net revenue, after operating expenses but before debt charges, was $294,000, compared with an operating loss of $29,000 in 1951. There were about 818,000 bus runs from the terminal, an increase of 3.5% over 1951. More than 40,000,000 passengers used the terminal.

Sewerage awards hit new highs; seen good for rest of year

It appears that 1953 is going to be a banner year for sewerage contractors. For the first 10 weeks of 1953, sewerage contract awards reported to ENGINEERING NEWS-RECORD were $74 million, an all-time high for this season of the year. Because of several big awards, like the $9.2-million Miami, Fla., contract, total awards are running 17% ahead of 1951, the previous record year. They're more than twice the volume for the first 10 weeks of 1952. And, judging from ENR's backlog of

the big boss who can thunder a "YES"

and the little boss who quietly shakes his head "NO"

Both types are important to you because both have to be sold on your product. In *every* important buying decision in this business of building, many bosses have their say before the final "OK" is given. You can't afford to overlook any of the many types and kinds of bosses that can affect your sale.

Bosses of all sizes, shapes, titles and jobs read Engineering News-Record every week because they need a reliable flow of information on all the forces and factors that make construction tick. The only place they can get all this information – and get it quickly, concisely, lucidly, and all in one package – is Engineering News-Record.

These bosses are the guys who say "yes" or "no" to everything that goes into a construction project. You can reach more of them through Engineering News-Record than any other way.

in construction, it takes many bosses to make one purchase

ENGINEERING NEWS-RECORD

A McGRAW-HILL PUBLICATION, 330 WEST 42nd STREET, NEW YORK 36, N. Y. • ABC • ABP

proposed projects, business should continue to be very good in this field through the rest of 1953.

A substantial part of the increase represents awards for new sewage treatment plants.

Most of these projects are being pressure over the years by public agencies for better handling of municipal and industrial wastes, and the fact that materials are easier to get now than they were last year.

The outlook is good for some time to come: ENR's backlog of proposed sewerage projects grew twice as fast in 1952 as in either of the two previous years.

Last year, new projects estimated to cost $636 million were proposed. In the first two months of this year another $144 million in proposed sewerage work was added to the backlog total, which now stands at $2,843 million.

The backlog is growing fastest in the western states—notably California, Texas, and Kansas.

FHA gets broader powers to insure home additions

Home builders and contractors got a break last week when President Eisenhower signed a congressional resolution boosting the Federal Housing Administration's authority to guarantee loans for home improvement. Before then, FHA could "insure" at total of $1,250 million of such loans at any one time. Now it can guarantee up to $1,750 million worth.

That frees about 390,000 home-improvement loans already approved by banks, which were held up for lack of a guarantee. FHA reached its $1,250-million established limit last September.

Since then, it has been able to make new guarantees only as existing insured loans were amortized. Lately, amortizations have been running at the rate of about $100 million a month.

The home-improvement program works like this: FHA guarantees loans made by banks to individuals. In return for this service, the banks pay FHA ½ of 1% of the face value of the loan.

Borrowers amortize their loans monthly. They pay an annual rate of 9.7% on the average amount outstanding.

FHA has guaranteed about 14.3 million home-improvement loans since the program started in 1934. Loans are now being granted at the rate of about two million annually.

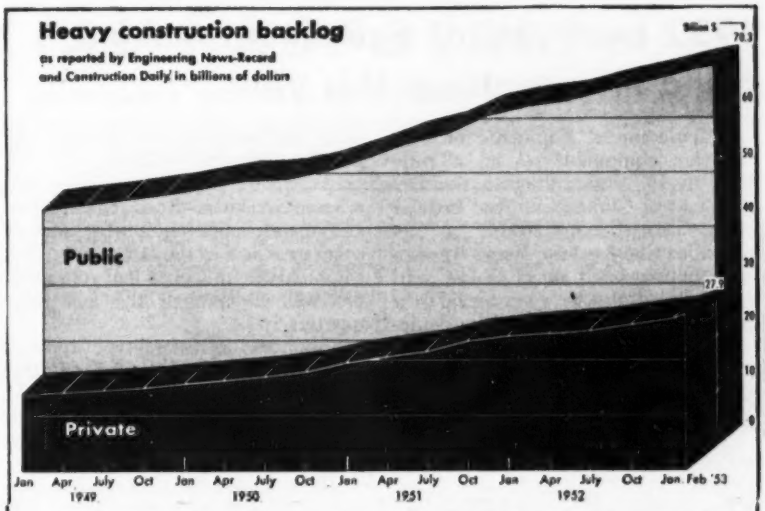

The ENR backlog of heavy construction climbed to $70.3 billion by the end of February. That's a new high (chart).

The private work backlog advanced the most in February. More than $1 billion worth of private construction was proposed last month, approximately twice the dollar volume of February, 1951. The total of public construction proposed in February was $600 million.

In private construction, new proposed commercial building projects were outstanding. During the first two months of 1953, there was an increase of 170%, in this category with a record total of $343 million proposed in February alone. Proposed industrial building projects totaled $276 million in February, and for the first two months were double the dollar value of projects proposed in the similar period of 1951. There was also a large volume of proposed work for pipelines and private mass housing projects.

In public construction, nearly all types reported by ENR showed a higher volume of proposed work in February, 1953, than in February, 1952. The only exception was the "unclassified" category.

Highways were the biggest item in February. In fact, for the first two months of the year almost six times as much highway work was proposed as in the 1952 period. The story is the same for bridges. And proposed earthworth and waterways projects show an increase of 10 times the same 1952 period.

City would use revenue bonds to help school

Revenue bonds, the tax-exempt securities issued by local governments, are getting all sorts of unusual applications these days. Just this month, for instance, Mayor Charles P. Farnsley of Louisville, Ken., decided to get the OK of the board of aldermen on an issue of revenue bonds to pay the costs of repairing a high school stadium. Courts had ruled recently that the Louisville Board of Education could not use its funds for repair of the stadium, or sell bonds which would be a general obligation of the taxpayers.

The stadium went without maintenance through the depression, and last year was declared unsafe. A group of engineers who have examined the structure say it could be put in shape for $100,000.

What Farnsley proposes to do is to get the city to issue revenue bonds, to be paid off by stadium receipts. In this way, the city's debt would not be increased. Walter Girdler, president of the Board of Education, says his board would issue the bonds itself, but doubts if it has the authority. If the city issues the bonds, it would take title to the stadium and lease it to the school board for an annual rent.

Housing starts rise

Housing starts were 77,000 in February, up 8% over January, according to the Bureau of Labor Statistics. That's at an annual rate of 1.2 million, total starts for both months are 148,000, slightly above the similar period in 1952. BLS also has just reported that urban building construction in 1952 was $8.9 billion, about the same as in 1951, but 15% under the record $10.5 billion worth of construction put in place in 1950.

1952 best yet for equipment makers; trend may continue this year

Manufacturers' shipments of construction equipment set an all-time high in 1952, according to the Department of Commerce. And because heavy construction awards as reported to ENGINEERING NEWS-RECORD —are running well ahead of last year, 1953 should also be a very good year for makers of construction equipment. However, manufacturers' backlogs of unfilled orders are down substantially this year. It looks as if they will have to get out and sell in 1953.

These set new records in 1952:

- Power shovels and cranes—up 11% from 1951.
- Road construction and maintenance equipment—up 5%.
- Equipment for mounting on tractors—up 19%.
- Track-laying tractors—up 6%.
- Wheel-type tractors—up 18%.

Two groups showed big declines in 1952. They were: (1) heavy-duty off-highway trucks and wagons, which was down 11%, and (2) the category which Commerce labels "other excavating and earthmoving equipment," down 46%. This includes loaders, discs used in road construction, and blade-type ditchers and trenchers.

Total shipments of construction equipment were down in the second half of 1952. In part, this was the normal seasonal trend. The usual pattern is for the largest volume to come in the first half, with a decline in the third quarter and then a pick-up in the fourth quarter.

• Steel strike again—But this pattern was accentuated in 1952 by the steel strike, which tended to cause a postponement of construction jobs. That in turn led to delays in equipment orders. Actual production of construction equipment was not much affected by the two-month strike. Manufacturers had enough steel to get through this period.

Though production held up, shipments dropped 34% in the third quarter. In the last quarter of 1952, there were some but shipments in this quarter were still 8% below the same period in 1951. That was the first time since early 1950 that shipments of construction equipment in any quarter were less than the same quarter of the preceding year.

During the last quarter, these categories showed higher volume than in the same 1951 period: power cranes and shovels; tracklaying tractors; equipment for mounting on tractors, and portable blast-hole drills.

• Some weakness—Road construction and maintenance equipment showed some weakness in the last quarter. But shipments in this class had run ahead of 1951 all through the first three quarters.

Shipments of wheel-type tractors, after hitting a new high in the second quarter of 1952, declined through the third and fourth quarters. Shipments in the final quarter were 50% under the same 1951 period.

There should be considerable buying of construction equipment this year. Contracts awards as reported to ENR show that in the first 11 weeks private construction is 48% ahead of last year, while state and municipal contracts are up 41%. Nearly all major types of construction show big gains in volume of contract awards.

However, these factors should also be considered: Residential construction, a very important part of total private construction awards, does not use much of this equipment. State highway department purchases of this class of equipment are budgeted 10% lower this year. And federal construction—a heavy user—is down so far this year (page 101) though it should come back later.

Business briefs . . .

• Industrial corporations have put out huge amounts in the past decade or so on construction of new plants and new equipment. U. S. Steel Corp. for instance, reported this week that it has spent $2,265 million since 1940 on production facilities. In 1952 alone, Big Steel spent $469 million, and at the year end had plans to spend about $506 million more. General Motors Corp. has just reported that since 1945 it has spent or committed itself to spend about $2,500 million on plant and equipment. Of this, $629 million was put out last year.

• Public utilities have also been doing a lot to keep the construction and construction-materials industries rolling along at top speed. Pacific Gas & Electric Co., one of the biggest, has spent one billion dollars on its post-war construction program. It plans to spend about $500 million more by the end of 1955. Commonwealth Edison Co. of Chicago, another big utility, says it has spent $600 million since 1945, and plans to spend another $500 million during the next four years.

• Aluminum production is moving up, as aluminum plants in the Pacific Northwest get more hydroelectric power. The Aluminum Assn. reports that production was 180,000,000 lb in January, up about 26,000,000 lb from a year ago.

Activity This Week

As reported to ENR
(in millions of dollars)

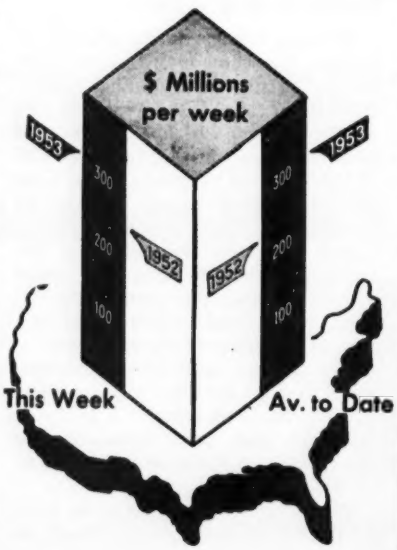

Contracts by type of work

	This Week	—Cumulative 12 wks— 1953	1952	% chge
Waterworks	$9.3	$57.3	$61.6	−7
Sewerage	6.2	83.2	45.1	+84
Bridges	5.8	214.5	60.6	+254
Highways	27.0	276.0	237.5	16
Earthwork, waterways	0.7	90.0	93.5	−4
Buildings:				
Public	18.2	379.4	350.6	+8
Housg., pub.	4.6	170.5	207.9	−18
Housg., priv.	67.2	975.9	640.9	+52
Commercial	14.7	195.2	113.4	+72
Industrial	136.4	959.9	634.7	+51
Unclassified	26.0	363.6	310.6	+17
Total	**$316.1**	**$3,765.5**	**$2,756.4**	**+37**

NOTE: Minimum size projects included are: Waterworks and waterway projects, $34,000; other public works, $60,000; industrial buildings, $82,000; other buildings, $300,000.

ENR indexes		Base Year = 100 1913	1926	1949
Constr. cost.	Mar.	587.44	282.38	123.15
	Feb.	587.19	282.26	123.09
Bldg. cost.	Mar.	424.89	229.68	120.78
	Feb.	425.24	229.87	120.88
Volume	Feb.	480	195	139

OFFICIAL PROPOSALS

APPEAR HERE EACH THURSDAY. PROPOSAL ADVERTISEMENTS ACCEPTED UP TO 10:30 A.M. FRIDAY FOR THE ISSUE DATED THE FOLLOWING THURSDAY. SEND ALL ADVERTISEMENTS TO CLASSIFIED ADVERTISING DIVISION, 29TH FLOOR, McGRAW-HILL PUB. CO., INC., 330 W. 42 ST., N. Y. 36, N. Y.

Bids: March 26, 1953

New York State Road Work

NOTICE TO CONTRACTORS: STATE DEPARTMENT OF PUBLIC WORKS, ALBANY, N. Y.,—Pursuant to the provisions of the Highway Law, and Article 2, Title 9 of the Public Authorities Law, and special provisions for projects financed with Federal Aid funds, sealed proposals will be received until ten-thirty o'clock A.M., eastern standard time on the 26th day of MARCH 1953, by Henry A. Cohen, Director, Bureau of Contracts and Accounts, 14th Floor, The Governor Alfred E. Smith State Office Building, Albany, N. Y., for the following projects:

County	Contract No.	Name	Miles	Type	Deposit	Estimated Cost of Work
		DISTRICT No. 1				
		G. L. Nickerson, District Engineer, 353 Broadway, Albany, New York				
Albany	C.T. 53-5	New York State Thruway-Catskill Section Subd. 5 (Volman Kill	0.11	9" Cem. Conc. Pavt. 2 at 25' Wide Br. & RR: Sep: Alpha I-Beam N. B. 448.5' S. B. 403	$32,000 Plans $10	$955,000
Rensselaer	FAS8 53-2	Miller Hill Road (Proj. S384(1)	1.86	Asp. Conc. Ty 1A, Opt.	$12,000 Plans $10	220,000
Schenectady	FAC 53-7	City of Schenectady; Broadway (Edison Ave. to Thruway Spur) Proj. U655(5)	0.20	9" Cem. Conc. Pavt. 60' Wide	$6,000 Plans $10.00	103,000
		DISTRICT No. 2				
		L. Ketchum, Dist. Engr., 109 No. Genesee St., Utica, N. Y.				
Montgomery	M.T. 53-5 ST.. 53-13	New York State Thruway- Mohawk Section, Subd. 12C (Caroga Creek-Fort Plain) Co. Rd. 65; Acc. Rd. Lock 15	Acc. 1.96 Thy. 2.26	9" Cem. Conc. Pavt. 2 at 25' Wide = 2.26 Mi. Asp. Conc. Ty. 1A, Opt. = 0.84 Mi. Gravel Surf. Rd. = 1.12 Mi. RR. Sep. Alpha I-Beam 44.5'	$140,000 Plans $25	2,852,000
		DISTRICT No. 4				
		E. G. Youngmann, Dist. Eng., Barge Canal Terminal, Rochester, N. Y.				
Genesee	O.T. 53-6 S.T. 53-14 S.T.C. 53-15 R.C. 53-24	New York State Thruway- Ontario Section, Subds. 3 & 4 (Slusser Rd.-Rte. 33); 9 Town Or Co. Cross Rds. Batavia-Elba, S. H. 853; Alabama-Batavia, Pt. 2, S. H. 1402	Acc. 5.68 Thy. 11.91	9" Cem. Conc. Pavt. 2 at 25' Var. Wide = 12.37 Mi. Asp. Conc. Ty. 1A, Opt. = 2.59 Mi.; Fdn. Crse. Grav. = 2.41 Mi.; Misc. Work = 0.22 Mi.; 7 Hy. Seps., Alpha I-Beams 203.6', 268.1', 342.4', 251.3', 215.1', 207.3' & 227.4' 1 Hy. Sept. Conc. Rigid Fr. 32.8' 1 RR. Sep. Two Cont. I-Beams 195'	$400,000 Plans $100	7,150,000
Genesee	O.T. 53-5 S.T. 53-11 R.C. 53-22	New York State Thruway—Ontario Section, Subds. 1 & 2 (Erie Co. Line-Slusser Rd.) Lake Rd.; Indian Falls-East Pembroke Rd.; Corfu-Indian Falls, Pt. 2; Indian Falls-Alabama, S. H. 8245	Acc. 1.58 Thy. 0.45	9" Cem. Pavt. 2 at 25' Wide = 0.45 Mi.; Asph. Conc. Type 1A, Opt. = 1.44 Mi.; Found. Crse. Grav. = 0.04 Mi.; Misc. Work = 0.10 Mi.; 3 Hy. Seps. Alpha I-Beams, 178.5', 278', 243.7'; 1 Hy. Sep. R. C. Closed Box 32.89' 1 RR. Sep. Alpha I-Beam 192' 1 Br. R. C. Twin Box 46' 1 Br. Alpha I-Beam 177'	$135,000 Plans $50	2,505,000
		DISTRICT No. 5				
		C. R. Waters, Dist. Engr., 65 Court Street, Buffalo, N. Y.				
Erie	FAC 53-9	City of Buffalo: Fuhrman Boulevard (High Level Br. Cont. 2) Proj. No. U750(6)	0.56	No Approach and Ramp "C" Embankment and Substructure No. Abut., Piers 25-30 and Bents 31-45	$43,000 Plans $15	774,000
		DISTRICT No. 7				
		R. W. Sweet, Dist. Engr., 444 Van Duzee Street, Watertown, N. Y.				
Jefferson	FAC 53-8	West Main Street: City of Watertown Proj. No. U1106(1)	0.75	Asph. Conc. Type 1A, Opt. = 0.71 Mi.; Misc. Work = 0.04 Mi.	$22,000 Plans $15	422,000
		DISTRICT No. 8				
		J. S. Bixby, Dist. Engr., Pleasant Valley Rd., Poughkeepsie, N. Y.				
Orange & Rockland	C.T. 53-6 S.T. 53-12 R.C. 53-23	New York State Thruway—Catskill Section, Subd. 7 (Suffern-Harriman, Pt. 1) 12 Town or County Cross Roads Rockland Co. Line-Tuxedo, S. H. 416	Acc. 3.56 Thy. 12.84	9" Cem. Conc. Pavt. 2 at 37' Wide = 13.36 Mi.; Asph. Conc. Type 1A, Opt. = 2.02 Mi.; Found. Crse. Gravel (Cal. Chloride Treated) = 1.02 Mi.; 9 Hy. & RR. Seps. Alpha I-Beams 259.2', 289.3', 107', 104', 148' 177.5' 354', 426' & 428' 2 Brs. Alpha I-Beams 57.4' & 67.4' 1 Br. Reinf. Conc. Twin Closed Box 109.8'	$1,000,000 Plans $100	19,274,000
		DISTRICT No. 9				
		F. W. Donovan, Dist. Engr., 71 Frederick Street, Binghamton, N. Y.				
Schoharie	FASS 53-3	Breakabeen-Broome Center Proj. No. S368(1)	4.65	Bit. D. S. T. Graded Gravel	$18,000 Plans $15	331,000

Maps, plans, specifications and proposal forms may be seen and obtained at the office of the State Department of Public Works, Bureau of Contracts and Accounts, Albany, N. Y., and at the office of the District Engineers noted above, and may also be seen at the office of the State Department of Public Works, 270 Broadway, New York City.

The deposit for Plans and Proposal Forms for each contract is indicated above. A refund will be made in full to bidders for return of one set, in good condition, within 30 days of award, or rejection of bids; refund for all other sets in good condition, similar period, will be 50% of deposit.

Special attention of bidders is called to "General Information for Bidders" in the proposal, specification, and contract agreement, and to the special provisions applying to projects financed with federal funds. Award of a contract is subject to the "Controlled Materials Plan" of the National Production Authority as well as to regulations issued thereunder.

Proposal for each contract must be submitted in a separate sealed envelope with the name and number of the contract plainly endorsed on the outside of the envelope. Each proposal must be accompanied by draft or certified check payable to the order of the "State of New York, Commissioner of Taxation and Finance" for the sum as specified in the advertisement and the proposal. The retention and disposal of the bidding check, the execution of the contract and bonds shall conform to the provisions of the Highway Law, as set forth in "Instructions to Bidders."

When optional types are permitted on contracts with federal funds, bidders must state in the space provided in the proposal the exact designation of the optional type upon which the proposal is predicated.

The right is reserved to reject any or all bids.

B. D. TALLAMY
SUPT. OF PUBLIC WORKS

INSURE COMPETITION

and get the lowest possible bid for your proposed work by placing your bids wanted advertising in this Section.

Don't limit competition to local bidding alone. Bring it to the attention of contractors the country over. They read this Section every week—make sure your bid is here where they can read it.

OFFICIAL PROPOSALS

Bids: March 30, 1953

Additions to Sewage Treatment Plant

Sealed proposals will be received by the Borough of Waynesburg, Greene County, Pennsylvania, until 8:00 o'clock P.M. (Eastern Standard Time) on March 30, 1953, at which time and place the bids will be publicly opened and read aloud, for the Construction of Additions to Primary Sewage Treatment Plant and Miscellaneous Appurtenances. The work will be divided into four contracts and separate proposals will be received for each of the following contracts:

Contract No. 1—General Construction of Additions to Primary Sewage Treatment Plant, including mechanical work.

Contract No. 2—Plumbing for Additions to Primary Sewage Treatment Plant.

Contract No. 3—Heating for Additions to Primary Sewage Treatment Plant.

Contract No. 4—Electrical Work for Additions to Primary Sewage Treatment Plant.

Copies of the Plans, Specifications, Proposal Forms, and other Contract Documents may be examined at the office of William E. Sees, Jr., Consulting Engineer, 222 North Third Street, Harrisburg, Pennsylvania or at the office of the Secretary of the Borough of Waynesburg, Pennsylvania. A complete set of bidding documents, may be obtained at the office of the Engineer upon a deposit of $30.00 for each set of documents. If the documents are returned in good condition within five (5) days after the opening of the bids, $15.00 of the deposit for one set will be refunded. If the documents are not returned within the time stated, the entire amount of the deposit will be forfeited. A certified check equal to five percent (5%) of this amount of the bid must be submitted with the proposal as bid security. Separate checks must be submitted for plans and specifications for each contract.

No bid may be withdrawn for forty-five (45) days after the scheduled time for receipt of bids.

The Borough of Waynesburg reserves the right to waive any informalities in or reject any or all bids.

K. W. Scott, Secretary
Borough of Waynesburg
Greene County, Pennsylvania

Bids: April 2, 1953

Construction of Structures

PENNSYLVANIA TURNPIKE COMMISSION
Harrisburg, Pennsylvania

NOTICE TO BIDDERS

Sealed proposals will be received by the Pennsylvania Turnpike Commission, through the Chairman, 11 North Fourth Street, Harrisburg, Pennsylvania, until 10:00 a.m., (Eastern Standard Time), the 2nd day of April 1953, and immediately thereafter will be taken to the Public Utility Commission's Hearing Room No. 1, North Office Building, State Capitol, Harrisburg, Pennsylvania and immediately publicly opened and read aloud, for the following contract and/or contracts.

For the construction of structures and the grading, drainage, and paving of Turnpike Section 32C, part of the Delaware River Pennsylvania Turnpike Extension in Plymouth Township, Montgomery County, Commonwealth of Pennsylvania, this section being situated as follows:

Beginning at a point approximately 149 feet east of the center line between tarcks of the Norristown Branch (P. G. & N. RR) of the Reading Railroad on the east bank of the Schuylkill River in Plymouth Township, Montgomery County, at Turnpike Station 3854+03.72 and thence in an easterly direction 15,063.12 feet to a point 15.3 feet west of the center line of Township Road 357 at Turnpike Station 535+85.89 in Plymouth Township, Montgomery County, a distance of approximately 2.85 miles.

The approximate quantities of the principal items are as follows:

Class 1 Excavation	893,660 cubic yards
Class 2 Excavation	19,740 cubic yards
Special Subgrade	200,683 square yards
Reinforced Concrete Pavement	105,284 square yards
Class "A" Concrete	7,199 cubic yards
Class "B" Concrete	5,196 cubic yards

For the construction of structures, and the grading, drainage, and paving of Turnpike Section 32D, part of the Delaware River Pennsylvania Turnpike Extension in Plymouth and Whitemarsh Townships, Montgomery County, Commonwealth of Pennsylvania, this section being situated as follows:

Beginning at a point approximately 351 feet west of the center line of Township Road 357 at Turnpike Station 532+50 in Plymouth Township, Montgomery County thence in a easterly direction 17,220 feet to a point approximately 894 feet east of the present center line of Legislative Route 153, Traffic Route 309 at Turnpike Station 704+40 in Whitemarsh Township, Montgomery County, a distance of approximately 3.26 miles.

The approximate quantities of the principal items are as follows:

Class 1 Excavation	696,894 cubic yards
Class 2 Excavation	9,979 cubic yards
Special Subgrade	155,252 square yards
Reinforced Concrete Pavement	85,879 square yards
Class "A" Concrete	4,063 cubic yards
Class "B" Concrete	5,770 cubic yards

Copies of plans, specifications, and other contract documents, including cross-sections are on file and open to public inspection at the offices of the Pennsylvania Turnpike Commission located at Harrisburg, Pennsylvania, on 12 March 1953. Copies of specifications for grading, drainage, paving, and structures may be purchased from the Pennsylvania Turnpike Commission for the sum of five (5.00) dollars per copy. Copies of cross-sections may be purchased from the Pennsylvania Turnpike Commission for the sum of fifty ($50.00) dollars per set, for each section.

Plans and contract documents exclusive of cross-sections and specifications may be obtained from the Commission upon deposit of ten ($10.00) dollars for each set, such deposits to be refunded in full to any actual bidder upon return of such documents in good condition within five (5) days after the date of the opening of the bids. Refund will be made for all plans, contract documents, and cross-sections returned, if the project is withdrawn from letting by the Pennsylvania Turnpike Commission.

Remittances are payable to the Pennsylvania Turnpike Commission and must accompany requests for drawings, specifications, contract documents, and cross-sections.

The Pennsylvania Turnpike Commission reserves the right to award each section as a separate contract or in a combined contract.

The character and amount of bid security to be furnished by bidder is stated in the Instructions to Bidders.

No bids may be withdrawn for thirty (30) days after the scheduled closing time for receipt of bids.

PENNSYLVANIA TURNPIKE COMMISSION
James F. Torrance
Secretary and Treasurer

Harrisburg, Pennsylvania
March 5, 1953

Bids: April 1, 1953

Project WVA 46-P-5A, Unit One, Sub-Sections 1 & 2 Elk River & Porter's Hollow Interceptor Sewers Charleston, W. Va.

NOTICE TO CONTRACTORS

The Sanitary Board of The City of Charleston, Charleston, West Virginia, will receive sealed bids for "Elk River & Porter's Hollow Interceptor Sewers" until 2 P.M. Eastern Standard Time on the 1st day of April, 1953, at the office of the Sanitary Board, Room 15, City Building, at which time and place all bids will be publicly opened and read aloud.

The successful bidder will be required to furnish a satisfactory performance bond in the amount of 100 per cent of contract.

Liquidated damages for delay will be One Hundred Dollars ($100.00) per day for each calendar day beyond the date specified in the contract.

The contract documents, including plans and specifications, are on file at the office of the Sanitary Board, City Building, Charleston, West Virginia, and at the office of Settle Engineers, Inc., 2nd Floor Peoples Building, Charleston, West Virginia, where they may be examined free of charge.

Copies of the documents may be obtained by depositing Forty Dollars ($40.00) with Settle Engineers, Inc., 2nd Floor Peoples Building, Charleston, West Virginia, for each set of documents so obtained. The amount of the deposit for one (1) set of documents will be refunded to each actual bidder who returns the plans and documents in good condition within five (5) days after the opening of bids.

The Sanitary Board of The City of Charleston reserves the right to reject any or all bids and to waive any informalities in bidding.

A certified check or cashier's check, payable to The Sanitary Board of The City of Charleston, West Virginia, or a satisfactory bid bond executed by the bidder and a surety company authorized to do business in West Virginia, in an amount equal to five per cent (5%) of the bid or an equal amount of U. S. Government Bonds, shall be submitted with each bid.

No bid may be withdrawn, after the scheduled closing time for receipt of bids, for at least thirty (30) days.

ESTIMATE OF
PRINCIPAL QUANTITIES:

- 1,600 lin. ft. 27" pipe in liner plate tunnel
- 1,330 lin. ft. 30" Pipe, open trench
- 2,900 lin. ft. 24" Pipe, open trench
- 10,000 lin. ft. 18" Pipe, open trench
- 5,200 lin. ft. 12" Pipe, open trench
- 215 cu. yds. Class A Concrete Regulator Manholes
- 840 vert. ft. Manholes
- 300 lin. ft. 12" C.I.P. in tunnel
- 200 lin. ft. 18" C.I.P. in tunnel

THE SANITARY BOARD OF THE CITY OF CHARLESTON,
By: F. Duane Hill
Secretary

Date: Mar. 11, 1953

U. S. Government

GOVERNMENT OF THE DISTRICT OF COLUMBIA, DIRECTOR OF HIGHWAYS, D. C., February 26, 1953. SEALED PROPOSALS will be received in Room 404, Library Building, 499 Pennsylvania Ave., N.W., Washington 1, D.C., until 2:00 P.M., April 2, 1953, EASTERN STANDARD TIME, and then publicly opened and read for constructing A BRIDGE OVER KINGMAN LAKE AND ANACOSTIA RIVER ON EAST CAPITOL STREET EXTENSION. The bridge will consist of fifteen (15) plate girder spans of approximately one hundred twenty feet (120') each for six (6) lanes of traffic with reinforced concrete floor and reinforced concrete abutments and piers on steel piles. Approximate quantities of major items are: 13,730 cubic yards excavation, 51,830 lineal feet steel H piles, 3,760 cubic yards tremie concrete, 6,500 cubic yards substructure concrete, 4,800 cubic yards superstructure concrete, 1,700,000 pounds reinforcing steel, 3,875,000 pounds structural silicon steel, 4,100,000 pounds structural carbon steel and 4,060 lineal feet of handrail. Bids will be received for three (3) alternates involving either the entire structure, the substructure only, or the superstructure only. Proposal forms, plans and specifications may be obtained from the Secretary, Contract Board, D.C., Room 406, Library Building, 499 Pennsylvania Avenue, N.W., Washington 1, D.C., by general contractors only, upon deposit of a certified check for each set, made payable to the Collector of Taxes, D. C., in the amount of FIFTY DOLLARS ($50.00). Telephone NAtional 8-6000, Extension 2378.

DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids (Specifications No. DC-3907) will be received at Field Office "A" 3rd and "A" sts. S. E. Ephrata, Washington, until 10 a.m. Pacific Std. Time, April 16, 1953, for furnishing labor and materials for Pumping Plants, Area E-5, East Low Canal Laterals, Columbia Basin Project, Washington. Location: One to three miles north and west of Warden, Grant County, Washington. Principal items are: Excavation, 27,000 cu. yds.; concrete, 950 cu. yds.; furnishing and laying 12,000 lin. ft. of concrete pipe; installing 264,000 lbs. of pumps, valves, and metalwork; and other work. Completion time 420 days. For particulars, address Bureau of Reclamation, Ephrata, Washington; or Building 53, Denver Federal Center, Denver, Colorado.

FRED G. AANDAHL, Assistant Secretary
for Water and Power Development
Department of the Interior

Contractors Watch This Section—

for new projects. Publish your announcements through the proposal sections of *Engineering News-Record* and get their bids.

OFFICIAL PROPOSALS

Bids: March 31, 1953

Rt. 43 (1927)—Rt. U.S. 30 (1953), Sec. 12-E

STATE OF NEW JERSEY
STATE HIGHWAY DEPARTMENT
TRENTON

NOTICE IS HEREBY GIVEN that sealed bids will be received by the State Highway Commissioner for:

Route 43 (1927)—Route U. S. 30 (1953), Section 12-E, from Hamburg Avenue, Egg Harbor City, to Union Avenue, Elwood, Resurfacing Eastbound Roadway, Mullica Township, Atlantic County. Length 3.944 miles. The principal items of construction are:

Estimated:

33,000 sq. yds. Reconstructed Gravel Shoulders

11,330 tons Bituminous Concrete Surface

Bids for the above will be received at the office of the State Highway Department, Assembly Room, Room 140, in the State Highway Office Building, 1035 Parkway Avenue, Trenton, New Jersey, on Tuesday, March 31, 1953, at eleven o'clock (11:00 A.M.—EASTERN STANDARD TIME), and will be opened and read immediately thereafter.

The receipt and opening of bids is subject to the proper qualification of the bidder in accordance with the provisions of the prequalification law and the regulations adopted by the State Highway Commissioner. Bidders must also submit a resvised financial statement and statement of plant and equipment with their bid.

Drawings, specifications and form of bid, contract and bond for the proposed work are on file in the office of the State Highway Department, Trenton, N. J., and may be inspected by prospective bidders during office hours. Plans will be furnished on a deposit of Ten Dollars ($10.00) for each set of plans upon application to A. Lee Grover, Chief Clerk, State Highway Department, Room 139, State Highway Office Building, 1035 Parkway Avenue, Trenton, N. J. Bids must be made upon the standard proposal forms in the manner designated in the standard State Highway specifications and must be enclosed in sealed special addressed envelopes bearing the name and address of the bidder and work bid upon on the outside, and must be accompanied by a certified check drawn to the order of the Treasurer of the State of New Jersey for not less than ten percent (10%) of the amount of the bid, provided that the said certified check shall not be less than $500.00 nor more than $20,000.00 and must be delivered at the above place on or before the hour named. Copies of the standard proposal forms and special addressed envelopes will be furnished on application. Bids not enclosed in sealed special addressed envelopes will be considered informal and will not be opened. The right is reserved to reject any or all bids.

Signed: R. J. Abbott
State Highway Commissioner

Bids: March 31, 1953

Clearing and Grubbing Pepacton Reservoir

CONTRACT 416

SEALED BIDS will be received by the Board of Water Supply, at its offices, thirteenth floor, 120 Wall Street, New York City, until 11:00 A.M., Eastern Standard Time, on Tuesday, March 31, 1953, for Contract 416, for clearing and grubbing the westerly half of the Pepacton reservoir, in preparation for the storage of water. The work will comprise the clearing of approximately 3,800 acres, the grubbing of about 700 acres, and required excavation and removal of excrementitious material, all as set forth in the specifications. This portion of the Pepacton reservoir is located in the Towns of Colchester and Andes, Delaware county, New York.

No bid will be received and deposited unless accompanied by a certified check upon a National or State bank, drawn and made payable to the order of the Comptroller of The City of New York, in the amount of seventy thousand dollars ($70,000.00) for the proper execution of the contract.

At the above place and time the bids will be publicly opened and read. Pamphlets containing information for bidders, forms of bid and contract, specifications, requirements as to surety, etc., can be obtained in Room 1316 at the above address, upon application in person or by mail, by depositing the sum of five dollars ($5.00) in cash or its equivalent for each pamphlet. Within 30 days following the award of contract or rejection of bids, the full amount of such deposit will be refunded for each pamphlet submitted as a bid and a refund of four dollars ($4.00) will be made for each other pamphlet returned in acceptable condition. For further particulars, apply at the office of the Chief Engineer at the above address.

IRVING V. A. HUIE, President, RUFUS E. McGAHEN, EDWARD C. MAGUIRE, Commissioners, Board of Water Supply; BETTY COHEN, Acting Secretary.

Bids: April 7, 1953

Interior Finish for Room 2222 (Gutmans Hardware Store)

THE PORT OF NEW YORK AUTHORITY
PORT AUTHORITY BUS TERMINAL
CONTRACT BT-110.075

Sealed proposals for the furnishing and installation of interior finish and equipment for Room 2222 on the Suburban Concourse of the Port Authority Bus Terminal will be received at the office of the Chief Engineer of The Port of New York Authority, Room 1100, 111 Eighth Avenue, New York 11, N. Y., until 2:30 P.M. on Tuesday, April 7, 1953, at which time and place said proposals will be opened and read.

Contract documents may be seen at the office of the Engineer of Materials of the Authority, Room 1110, and copies will be furnished upon deposit of $25.00 per set. The deposit shall be delivered to the Treasury Department, Room 1001, where a receipt in duplicate will be issued. A copy of the receipt shall be delivered to the Engineer of Materials who will furnish the contract documents. The deposit will be remitted if the documents are returned in good condition, not later than forty days after the opening of proposals. The deposit will be forfeited if the documents are not so returned within the forty days.

THE PORT OF NEW YORK AUTHORITY
Howard S. Cullman, Chairman
New York, March 19, 1953

Bids: April 2, 1953

Installation of Traffic Gates and Guard Booth

THE PORT OF NEW YORK AUTHORITY
NEW YORK INTERNATIONAL AIRPORT
CONTRACT O & M 180
PROPOSAL NO. 53

Sealed proposals for the installation of Traffic Gates and Guard Booth at New York International Airport, Jamaica, N. Y., will be received at the office of the Director of Purchase of The Port of New York Authority, Room 900, 111-8th Ave., New York 11, until 11:00 A.M. Thursday, April 2, 1953, at which time and place proposals will be opened and read.

Contract documents may be seen at the office of the Department of Purchase and Administrative Services, The Port of New York Authority, Room 900, and copies will be furnished upon deposit of $25 per set. The deposit will be refunded if the documents are returned in good condition, not later than thirty (30) days after the opening of proposals.

THE PORT OF NEW YORK AUTHORITY
Howard S. Cullman, Chairman
New York, N. Y.

Bids: March 31, 1953

Landscaping

THE PORT OF NEW YORK AUTHORITY
NEWARK AIRPORT
PASSENGER TERMINAL
CONTRACT NA-170.043

Sealed proposals for landscaping at the Passenger Terminal at Newark Airport will be received at the office of the Chief Engineer of The Port of New York Authority, Room 1100, 111 Eighth Avenue, New York 11, N. Y. until 2:30 P.M., Tuesday, March 31, 1953 at which time and place said proposals will be opened and read.

Contract documents may be seen at the office of the Engineer of Materials of the Authority, Room 1110, and copies will be furnished upon deposit of $25.00 per set. The deposit shall be delivered to the Treasury Department, Room 1001, where a receipt in duplicate will be issued. A copy of the receipt shall be delivered to the Engineer of Materials who will furnish the contract documents. The deposit will be remitted if the documents are returned in good condition, not later than forty days after the opening of proposals. The deposit will be forfeited if the documents are not so returned within the forty days.

THE PORT OF NEW YORK AUTHORITY
Howard S. Cullman, Chairman
New York, March 19, 1953

The minute you seal the envelope you seal the verdict...

NO ONE but a bidder can decide, practically, whether he, or someone else, will be the successful bidder on any contract . . . because it is you — the bidder — who decide what you will charge to do the work. No one can decide that but you. So, you actually "write your own ticket."

NATURALLY, you must deliver certain specified materials and perform definite functions, within a certain time—that much of the job is something over which you have no control. But . . . it is when you begin to plan ways and means of DOING the job that you start to win or lose it. If you can do it more quickly, with less loss of motion, and, possibly, with fewer man-hours to charge against the job—in other words, at a lower cost to you — you will have the "edge" you need to make you the successful bidder.

LOW cost operation is usually the result of a thorough knowledge of the most efficient methods—and the use of modern equipment. You will be well repaid through your reading of ENGINEERING NEWS-RECORD—both editorial and advertising.

PROFESSIONAL SERVICES

Cards arranged by states, cities, names

Additional cards on following pages

Polk, Powell and Hendon

Engineers—Consultants

Harry H. Hendon
Hugh A. Powell

Water Systems, Sewers and Sewage Treatment Plants, Steam and Hydro Plants, dams, drainage, industrial buildings, municipal planning reports, plans, estimates and construction supervision.

620 Chamber of Commerce Bldg., Birmingham 3, Ala.

Palmer and Baker, Inc.

Consulting Engineers - Architects
Naval Architects - Marine Engineers

Surveys-Reports-Design-Supervision Consultation

Transportation and Traffic Problems
Tunnels-Bridges-Highways-Airports
Industrial Buildings
Waterfront and Harbor Structures
Graving and Floating Dry Docks
Vessels, Boats and Floating Equipment
Complete Soils, Materials and Chemical Laboratories

Mobile, Ala. — New Orleans, La.
Washington, D. C. — Houston, Texas

John S. Cotton

Consulting Engineer

Hydroelectric, water supply, irrigation, and multiple purpose projects; flood and erosion control; river basin development planning; dams and their foundations; tunnels; marine structures; valuations; rates.

28 Brookside Dr., San Anselmo, Calif.

International Engineering Company, Inc.

ENGINEERS

Investigations - Reports - Design
Procurement - Field Engineering
Domestic and Foreign
74 New Montgomery St.
San Francisco 5, California.

Heron Engineering Co.

Chemical, Mining, Industrial and Hydraulic Plants, Irrigation, Water Supply, Power and Sewerage Systems, Large Rockfill Dams, Airports, Oil, Gas and Water Pipe Lines.
2000 So. Acoma, Denver 10, Colorado
Chama, New Mexico.

Duval Engineering & Contracting Co.

General Contractors

FOUNDATION BORINGS
For Engineers and Architects.

Jacksonville, — Florida

Rader Engineering Co.

Water Works, Sewers, Refuse Disposal, Ports, Harbors, Flood Control, Bridges, Tunnels, Highways, Airports, Traffic, Foundations, Buildings, Reports, Investigations, Consultations.

1615 duPont Building, Miami, Florida

Law-Barrow-Agee Laboratories, Inc.

Soils Engineers & Consultants

Soil Testing—Soil Boring—Rock Drilling—Load Testing—Field Control—Engineering Studies—Chemical Analysis—Physical Testing
Box 1558 Atlanta 1, Ga.
Serving the entire South

Patchen & Zimmerman

Engineers

Construction Plant, Cofferdams, Structures, Industrial Plants, Dams, Sewerage and Sewage Treatment. Water Supply and Treatment. Supervision, Surveys, Reports.

Augusta, Ga. — Anniston, Ala.

Alvord, Burdick & Howson

Charles B. Burdick
Louis B. Howson Donald H. Maxwell
Consulting Engineers

Water Works	Sewerage
Water Purification	Sewage Treatment
Flood Relief	Power Generation
Drainage	Appraisals

Room 1401
20 North Wacker Drive, Chicago

A. J. Boynton & Co.

ENGINEERS

Fixed and Movable Bridges
Structures
Foundations

Design
Construction

109 N. Wabash Ave., Chicago 2.

Consoer, Townsend & Associates

Water Supply, Sewerage, Flood Control & Drainage, Bridges, Express Highways, Paving, Power Plants, Appraisals, Reports, Traffic Studies, Airports, Gas & Electric Transmission Lines.
351 East Ohio St., Chicago 11, Illinois

De Leuw, Cather & Company

CONSULTING ENGINEERS

Transportation, Public Transit and Traffic Problems

Industrial Plants — Grade Separations
Railroads — Expressways
Subways — Tunnels
Power Plants — Municipal Works

150 North Wacker Drive
Chicago 6, Ill.

79 McAllister Street
San Francisco 2, Calif.

Greeley and Hansen

Engineers

Water Supply, Water Purification
Sewerage, Sewage Treatment
Flood Control, Drainage, Refuse Disposal
220 S. State Street, Chicago 4

Hazelet & Erdal

CONSULTING ENGINEERS

Fixed Bridges, Movable Bridges, Industrial Plants, Expressways, Airports, Dams

Monadnock Block, Chicago 4, Ill.
Dixie Terminal Bldg., Cincinnati 2, O.
Commerce Bldg., Louisville 2, Ky.

Macdonald Engineering Co.

Foundation Investigations
Soil Analyses — Reports

188 West Randolph Street
Chicago 1, Illinois

Pioneer Service & Engineering Co.

Consulting and Design Engineers
Operations - - - Purchasing
Steam - - Hydraulic - - Gas
Public Utilities - - Industrials
281 So. La Salle St. — Chicago 4

Sargent & Lundy

ENGINEERS

Steam and Electric Plants
Utilities—Industrials
Studies—Reports—Design
Supervision
Chicago

Soil Testing Services, Inc.

Theo. W. Van Zelst — Carl A. Metz
John P. Gnaedlinger

Soil Borings — Rock Coring
Engineering Testing of Soils
Soil & Foundation Reports

4520 W. North Av. — Chicago 39

Wight and Company

Consulting Engineers

Airfields — Municipal Improvements
Sewage Disposal — Pavements — Drainage Surveys
1008 Curtiss St. — Downers Grove, Ill.

Jenkins, Merchant & Nankivil

Consulting Engineers

Municipal Improvements — Sewerage
Power Development — Water Systems
Traffic Surveys — Industrial Plants
Flood Control — Recreational Facilities
Airports — Investigations and Reports
805 E. Miller St., Springfield, Ill.

Chas. W. Cole & Son

Sewerage, Sewage Treatment, Industrial Wastes, Water Supply, Water Treatment, Airports, Industrial Buildings.
Chas. W. Cole, Sr. Chas. W. Cole, Jr.
Ralph J. Bushee, M. J. McErlain
220 W. LaSalle, South Bend, Ind.

Stanley Engineering Company, *Consulting Engineers*

Airports - Drainage - Electric Power
Flood Control - Industrial - Rate Studies - Sewerage - Valuations - Water Works
Hershey Building — Muscatine, Ia.

Eustis Engineering Company

FOUNDATION AND SOIL MECHANICS INVESTIGATIONS

Soil Borings — *Laboratory Tests*
Foundation Analyses — *Reports*

3635 Airline Highway
New Orleans 20, La.

Robertson & Associates

Consulting Engineers

Bridges - Structures - Foundations
Industrial Buildings & Facilities
Highway Planning
Investigations - Designs - Reports
Supervision of Construction
Baltimore, Md. — Richmond, Va.

Associated Engineers Inc.

Design Engineers

Power Plants, Steel Mills, Roads, Bridges, Industrial Plants, Process Piping, Proposals & Studies.

Bowles Agawam Airport

Agawam, Massachusetts

Jackson & Moreland

Engineers and Consultants

Design and Supervision of Construction
Reports—Examinations—Appraisals
Machine Design—Technical Publications

Boston — New York

Chas. T. Main, Inc.

Engineers

Design and Supervision of Construction for Industrial Plants
Electrical, Steam and Hydraulic Engineering
Investigations, Reports and Appraisals
Chamber of Commerce Bldg.
80 Federal St., Boston, Mass.

Metcalf & Eddy

ENGINEERS

Investigations — Reports — Design
Supervision of Construction and Operation
Management — Valuation — Laboratory
1300 Statler Building, Boston 16

Philip B. Streander and Affiliates

Consulting Sanitary Engineers

Water Supply, Treatment, Distribution
Sewage, Sewage Treatment
Plans, Supervision, Reports
132 Nassau St. — New York 7, N. Y.
683 Atlantic Ave. — Boston 11, Mass.

Black & Veatch

Consulting Engineers

Water - Sewage - Electricity - Industry

Reports, Design, Supervision of Construction, Investigations, Valuation and Rates.

4706 Broadway, Kansas City, 2, Mo.

Burns & McDonnell

Consulting and Designing Engineers

P. O. Box 7088, Kansas City 2, Mo.

1404 E. 9th St., Cleveland, 14, Ohio

Harrington & Cortelyou

Consulting Engineers

Frank M. Cortelyou
E. M. Newman F. M. Cortelyou, Jr.
Movable and Fixed Bridges of All Types, Foundations, and Related Structures.
1004 Baltimore — Kansas City 6, Mo.

Russell and Axon

Consulting Engineers

Civil — Sanitary — Structural
Industrial — Electrical
Rate Investigations
408 Olive St. — St. Louis 2, Mo.
Municipal Airport Daytona Beach, Fla.

Sverdrup & Parcel, Inc.

Consulting Engineers

Bridges, Structures and Reports, Industrial and Power Plant Engineering.

Syndicate Trust Bldg., St. Louis 1, Mo.
220 Bush St., San Francisco 4, Calif.

William J. Wenzel

Consulting Engineer

Great Falls, Montana

Developing the Great Northwest

Greer & McClelland

Consulting Engineers

FOUNDATION
INVESTIGATIONS

98 Greenwood Ave. — Montclair, N. J.
2649 N. Main St. — Houston, Texas

Edwards, Kelcey & Beck

Reports, Design Supervision, Expressways, Port & Harbor Works, Terminals, Tunnels, Bridges, Water Supply, Industrial Plants, Traffic and Management Studies.

3 William Street — 250 Park Avenue
Newark 2, N. J. — New York 17, N. Y.

W. W. Slocum & Co.

ENGINEERS

Industrial - Design - Management
National Newark Building
744 Broad St., Newark 2, N. J.

Frank E. Harley and Associates

Consulting Engineers

Design, Surveys, Plans and Construction Highways, Sewerage and Sewage Treatment, Water Supply and Purification, Municipal Problems.
Harley Bldg., 266 Godwin, Wyckoff, N. J.

Benjamin L. Smith & Associates

Engineers

Investigations—Reports
Designs—Supervision—Valuations
Municipal Engineering and Public Utilities
11 North Pearl St. — Albany 7, N. Y.

E. Lee Heidenreich, Jr.

Consulting Engineer

Quarries — Plant Layout
Crushing Plants — Design
Milling Plants — Appraisals

75 Second Street, Newburgh, N. Y. — 9 So. Clinton St., Chicago 6, Ill.

Ammann & Whitney

Consulting Engineers

Design — Construction Supervision
Bridges, Buildings, Industrial Plants, Special Structures, Foundations, Airport Facilities, Expressways.

76 Ninth Avenue, New York 11, N. Y.
724 E Mason Street, Milwaukee 2, Wis.

Barker & Wheeler

Water Supply — Utility and
Sewerage — Industrial
Sewage Disposal — Valuations
Power Systems — Reports

New York City, 11 Park Place
Albany, N. Y. 36 State St.

PROFESSIONAL SERVICES

Cards arranged by states, cities, names — Additional cards on preceding and following pages

Clinton L. Bogert Associates

Consulting Engineers

Water and Sewage Works
Refuse Disposal — Industrial Wastes
Drainage — Flood Control

624 Madison Ave., New York 22, N. Y.

Bowe, Albertson & Associates

Engineers

Water and Sewage Works—Industrial Wastes—Refuse Disposal — Municipal Projects—Airfields—Industrial Buildings — Reports — Designs—Estimates —Valuations—Laboratory Service.

110 William St., New York 7, N. Y.

Brown & Blauvelt

CONSULTING ENGINEERS

Expressways, Parkways, Highways
Bridges, Dams, Airports
Industrial Plants, Site Planning
Preliminary Reports
Supervision of Construction
Material Controls, Soils and Concrete Testing
Municipal Engineering Services
Tax Maps, Surveying

468 4th Avenue, New York 16, N. Y.
140 8th Street, Pittsburgh, Pa.

Buck, Seifert & Jost

Consulting Engineers

(Formerly Nicholas S. Hill Associates)
Water Supply — Sewage — Hydraulic Developments, Reports and Valuations. Chemical and Biological Laboratories.
New York City, 112 E. 19th St.

Ebasco Services Inc.

ENGINEERS
CONSTRUCTORS
BUSINESS CONSULTANTS

Design and Construction
Financial and Operating Consultation
Investigations and Reports
Consulting Engineering

Two Rector Street — New York
209 S. LaSalle Street — Chic. 4, Ill.
1604 K Street, N.W. — Wash. D. C.

Fay, Spofford & Thorndike

Engineers

Charles M. Spofford — Ralph W. Horne
John Ayer — William L. Hyland
Bion A. Bowman — Frank L. Lincoln
Carroll A. Farwell — Howard J. Williams

Bridges and Industrial Plants
Water Supply and Sewerage Works
Port and Terminal Works — Airports

Valuations, Investigations, Designs, Supervision of Construction.

11 Beacon St., Boston, Mass.
420 Lexington Ave., N. Y.
(Graybar Bldg.)

The Fraser-Brace Companies

Design Engineers and Constructors

Electro-smelting & Refining
Chemical & Process Industries
Industrial Plants—Pulp & Paper Mills
Dams & Hydro-electric Developments
Heavy Foundations—Port Facilities

10 E 40 St — 360 St James St W
New York 16 — Montreal Can.

Freyssinet Company, Inc.

Prestressed concrete structures:

Industrial Buildings
Bridges
Waterfront & Harbor Structures
Storage Tanks
Underpinnings

Estimates, tests, reports, design and supervision

57 William Street, New York 5, N. Y.

Hazen and Sawyer

Engineers

Richard Hazen — Alfred W. Sawyer
Municipal and Industrial Water Supply
Purification and Distribution, Sewage Works and Waste Disposal
Investigations, Design, Supervision of Construction and Operation
110 East 42nd St., New York 17, N. Y.

Hardesty & Hanover

Consulting Engineers

Successors to Waddell & Hardesty

Bridges
Long Spans of All Types
Movable—Lift, Bascule and Swing
Hanover Skew Bascule
Steel and Concrete Spans
Grade Crossing Eliminations

Other Structures
Foundations
Supervision, Reports, Appraisals

101 Park Avenue, New York 17, N. Y.

Frederic R. Harris, Inc.

CONSULTING ENGINEERS

F. H. Dechant, E. J. Quirin,
E. H. Harlow

Harbors, Piers & Bulkheads, Drydocks.
Foundations, Soil Mechanics.
Sanitary & Industrial Waste Disposal.
Water Supply, Flood Control.
Airports, Highways, Bridges.
Power, Industrial Plants, Buildings

27 William Street — New York
3 William Street — Newark
Fidelity Phila. Trust Bldg. — Philadelphia

Howard, Needles, Tammen & Bergendoff

Consulting Engineers

Bridges and Structures

New York, N. Y., 55 Liberty St.
Kansas City, Mo., 921 Walnut St.

Knappen-Tippetts-Abbett-McCarthy

Engineers

Ports, Harbors, Flood Control, Power, Dams, Bridges, Tunnels, Highways, Subways, Airports, Traffic, Foundations, Water Supply, Sewerage, Reports, Design, Supervision, Consultation.

62 West 47th Street, New York City

Modjeski and Masters

Consulting Engineers

Design, Supervision, Reports, Inspection and Investigations, of Bridges, Structures, and Foundations.

State Street Bldg. — 33rd and Arch Sts.
Harrisburg, Pa. — Philadelphia 4, Pa.

Moran, Proctor Mueser & Rutledge

Consulting Engineers

Foundations for Buildings, Bridges and Dams; Tunnels, Bulkheads, Marine Structures; Soil Studies and Tests; Reports, design and supervision.

New York 17, N. Y. 420 Lexington Ave.

PARDO, PROCTOR, FREEMAN & MUESER
Ap. Corrfos 614 — Caracas, Venezuela

Parsons, Brinckerhoff Hall & Macdonald

ENGINEERS

Airports, Bridges, Tunnels, Highways, Traffic and Transportation Reports, Subways, Foundations, Harbor Works, Valuations, Power Developments, Industrial Buildings, Dams, Sewerage, Water Supply.

51 Broadway, New York 6, N. Y.

The Pitometer Company

Engineers

Water Waste Surveys
Trunk Main Surveys
Water Distribution Studies
Water Measurements & Special Hydraulic Investigations

New York, 50 Church St.

Malcolm Pirnie Engineers

Civil & Sanitary Engineers

Malcolm Pirnie — Ernest W. Whitlock
Robert D. Mitchell — Carl A. Arenander
Malcolm Pirnie, Jr.

Investigations, Reports, Plans
Supervision of Construction and Operations.

Appraisals and Rates

25 W. 43rd St., New York 36, N. Y.

Alexander Potter Associates

Consulting Engineers

Water Works, Sewerage, Industrial Waste, Hydraulic Works, Reports, Designs, Appraisals.

50 Church St., New York, N. Y.

Clyde Potts Assoc.

Weston Gavett-Stanley N. Williams
Consulting Sanitary Engineers

Sewerage and Sewage Disposal
Water Works and Water Supply
Valuations and Appraisals

30 Church Street, New York 7

The Preload Company, Inc.

Consulting Engineers
in
Prestressed Design

211 East 37th St., N. Y. 16, N. Y.

Sanderson & Porter

Engineers and Constructors

New York • Chicago • San Francisco

Scheidenhelm, F. W.

Consulting Engineer

Hydraulic Engineering; Hydro-electric Development; Water Supply; Flood Control; Engineering Problems relating to Water Rights and Water Power Laws; Appraisals. 50 Church Street, New York 7, N. Y.

Seelye Stevenson Value & Knecht

Consulting Engineers

MANUFACTURING PLANTS
Plans, Specifications, Field Supervision, Reports, Valuation.

HEAVY ENGINEERING
Airports, Paving, Bridges, Stadia, Dams, Water Supply, Sanitation, Tunnels, Piers, Harbors, Industrial Waste Disposal.

STRUCTURAL
Skeleton Buildings, Foundations, Soil Studies, Concrete Control, Underpinning.

MECHANICAL - ELECTRICAL
Steam and Electric Generating Plants, Heating, Air-Conditioning, Refrigeration.

101 Park Ave. — New York 17, N. Y.

Severud-Elstad-Krueger

Consulting Engineers

Structural Design - Supervision
Reports - Buildings - Airports
Special Structures

415 Lexington Avenue
New York 17, N. Y.

Frederick Snare Corporation

Engineers—Contractors

Harbor Works, Bridges, Power Plants, Dams, Docks and Terminals.
Difficult and Unusual Foundations A Specialty.

233 Broadway, New York City 7

Havana, Cuba — Lima, Peru
Bogota, Colombia, Caracas, Venezuela, San Juan, Puerto Rico, Guayaquil, Ecuador.

Singstad & Baillie

Consulting Engineers

Ole Singstad — David G. Baillie, Jr.

Tunnels, Subways, Highways
Foundations, Parking Garages

24 State St. — New York 4, N. Y.

D. B. Steinman

Consulting Engineer

BRIDGES
Design, Construction
Strengthening, Investigations, Reports, Advisory Service

117 Liberty St., New York 6, N. Y.

Taylor, Henry W.

Water Supply, Sewerage
Garbage Disposal, Incineration
Industrial Wastes Disposal
Hydraulic Developments

11 Park Place, New York City

The J. G. White Engineering Corporation

Design—Construction
Reports—Appraisals

80 Broad Street, New York 4

Keis & Holroyd

Consulting Engineers

Formerly Solomon & Keis
Since 1906
Water Supply, Sewage Disposal, Garbage & Refuse Incineration, Industrial buildings.

Troy, N. Y. — Ft. Lauderdale, Fla.

The Austin Company

Design and Construction

Manufacturing and Process Plants
Airports & Air Transport Buildings
Railroad Terminals and Facilities
Power Plants—Industrial & Institutional
Industrial Office Buildings and Laboratories
Reports and Plant Location Surveys

New York CLEVELAND Los Angeles
Chicago — Houston — Oakland
Detroit — Seattle

Havens and Emerson

W. L. Havens — C. A. Emerson
A. A. Burger F. C. Tolles F. W. Jones
W. L. Leach H. H. Moseley J. W. Avery
CONSULTING ENGINEERS
Water, Sewerage, Garbage, Industrial Wastes, Valuations—Laboratories
Leader Bldg. — Woolworth Bldg.
Cleveland 14 — New York 7

Burgess & Niple

Civil and Sanitary Engineers
Consultants since 1908

Water supply, treatment and distribution, Sewage and industrial wastes disposal Investigations, reports, appraisals, rates Plant operation, laboratory, plans and specifications.

584 E. Broad St. — Columbus 15, Ohio

Warner Engineering Co.

Engineers

Consultation—Design—Detailing
Structural—Mechanical—Hydraulic
Industrial Piping and Sewerage Systems
Industrial Waste and Sanitary Problems

411 Broadway Building Lorain, Ohio

Jones, Henry & Williams

(formerly Jones, Henry & Schoonmaker)
Consulting Sanitary Engineers

Water Works, Sewerage & Treatment
Waste Disposal

Security Building — Toledo 4, Ohio

Toledo Testing Laboratory

Engineers—Chemists

Concrete — Soils — Asphalt
Inspection — Research
Tests — Development
Foundation Investigation
Borings — Diamond Drilling — Load Tests
Soils Mechanics Laboratory

1810 North 12th St. — Toledo 2, Ohio

PROFESSIONAL SERVICES

Cards arranged by states, cities, names

Additional cards on preceding pages

Benham Engineering Co.
Established in 1909
Design and Construction Engineering Services for Water and Sewage—Highways and Structures—Airports—Power and Heating Plants
Suite 550 American National Building
Oklahoma City, Oklahoma

Loedding Engineering Co., Inc.
Consulting, Design and Detail
Industrial and Commercial Planning
Bridges, Structures of All Types
Material Handling, Conveyors
Gantry, Overhead and Jib Cranes
Reinforced Concrete and Foundations
Industrial Piping and Ventilation
Economy Bank Bldg Ambridge, Penna.

Capitol Engineering Corporation
Engineers—Constructors—Management
Bridges Dams
Planning Airports
Sewage Systems Water Works
Design and Surveys Roads & Streets
Executive Offices Dillsburg, Penna.

Gannett Fleming Corddry & Carpenter, Inc.
ENGINEERS
Dams, Water Works, Sewage, Industrial Wastes & Garbage Disposal, Highways, Bridges & Airports, Traffic & Parking—Appraisals, Investigations & Reports.
Harrisburg, Penna.
Branch Offices
Pittsburgh, Pa. Philadelphia, Pa.
Daytona Beach, Fla. Pleasantville, N. J.

Aero Service Corporation
Photogrammetric Engineers
Aerial Topographic Maps
Precise Photo Mosaics
Plastic Relief Models
236 E. Courtland St.
Philadelphia 20, Pa.

Consult these Specialists:
Let them save your time by bringing their broad experience in their specialty to bear on your problems.

Albright & Friel, Inc.
Consulting Engineers
Water, Sewage and Industrial Wastes Problems, Airfields, Refuse Incinerators, Dams, Power Plants, Flood Control, Industrial Buildings, City Planning, Reports, Appraisals and Rates, Laboratory.
121 So. Broad St., Philadelphia 7, Pa.

Day & Zimmerman, Inc.
Engineers
Designs, Construction, Valuations
Reports and Management
Public Utilities and Industrials
New York Philadelphia Chicago

Frederick H. Dechant
Consulting Engineer
Chairman of the Board ,
Frederic R. Harris Inc.
Water Works, Industrial Wastes, Sewerage, Recovery Processes, Hydraulic Works, Gas Plants
Philadelphia: Fidelity Phila. Trust Bldg. New York: 27 William St.

Fridy - Gauker - Truscott & Fridy
Architects & Engineers
Water Sewerage . Industrial Waste
Incineration Power & Distribution
Airport . Building . Town Planning
1321 Arch Street . Philadelphia 7, Pa.

G. G. Greulich
Consulting Engineer
Investigations, Reports, Advice. Pile Foundations, Sheet Piling, Cofferdams, Bulkheads, Piers, Bridge Decks, Bank Vaults.
1346 Connecticut NW 778 Osage Rd.
Washington 6, D. C. Pittsburgh, Pa.

Hunting, Larsen & Dunnells, *Engineers*
Industrial Plants—Warehouses, Office and Commercial Buildings. Steel and Reinforced Concrete. Design and Supervision. Reports.
1150 Century Bldg., Pittsburgh, Pa.

Morris Knowles Inc.
Engineers
Water Supply and Purification Sewerage and Sewage Disposal, Valuations, Laboratory, City Planning.
Pittsburgh, Pa.

Peter F. Loftus Corporation
Engineering and Architectural Consultants and Designers
1st National Bank Bldg.,
Pittsburgh 22, Pa.
Cable Address—
"LOFTUS—Pittsburgh"

Gilbert Associates, Inc.
Engineers and Consultants
Utilities • Industrials • Municipals
Power - Water - Sewerage
Reading, Pa.
New York - Philadelphia - Washington

Michael Baker, Jr., Inc.
The BAKER ENGINEERS, Civil Engineers, Planners, and Surveyors. Municipal Engineers, Airport Design, Highway Design, Sewage Disposal systems, Water Works Design and Operation, City Planners, All Surveys.
Home Office: Rochester, Pa., Branch Offices: Jackson, Miss., Harrisburg, Pa.

Atlas Engineering Corporation
Architects-Engineers
Designers-Consultants
Knoxville - Clinton - Oak Ridge
Tennessee

Lockwood & Andrews
Consulting Engineers
Airports, Paving, Industrial Plants, Drainage & Sewerage, Site Locations, Soils & Foundations, Water Supply, Structures, Harbor Works, Valuations, Reports — Design — Supervision
Union Nat'l Bank Bldg., Houston, Tex.

Hutchings & Milani, Ltd.
Engineers & Constructors
Industrial - Roads - Power Plants - Dams - Tunnels - Harbor Works - Foundations - Hotels
CARIBBEAN - WEST INDIES - SOUTH AMERICA
BERMUDA-CARIBBEAN CONSULTANTS, LTD.
Architects & Engineers.
Design - Reports - Investigations
L. C. Milani, ASCE; C. W. Abbott, R.I.B.A.; N. J. Senesey, A.I.A.; P. Coller; T. F. Carr, H. J. Williams; S. H. Pace; W. Weir.
BOTH HEAD OFFICES AT HAMILTON, BERMUDA.

Atlantic, Gulf and Pacific Company of Manila
Engineers
Design - Construction
Inquiries invited for work in the Philippines and Far East.
P. O. Box 636, Manila, Philippines
Cable Address: DREDGING Manila

The Foundation Engineering Company of Puerto Rico
Consulting Engineers
Foundation and Soil Mechanics Investigations, Laboratory analyses, reports and recommendations, design of structures, Supervision.
P. O. Box 821, San Juan, Puerto Rico

Inspecting and Testing

Robert W. Hunt Company
Inspection and Tests of Engineering Materials and Equipment.
General Offices and Laboratories
175 West Jackson Blvd., Chicago 4
All Principal Cities

Johnson Soils Engineering Laboratory
Engineering design and construction tests run from MOBILE LABORATORY UNITS at construction site.
Field load bearing tests.
193 West Shore Ave., Bogota, N. J.
Bogota-Hubbard 7-4408

The Haller Testing Laboratories, Inc.
Testing and Inspection of Construction Materials
Complete Soils Laboratory
Load Tests—Soils & Structures
Concrete and Bituminous Materials
801 2nd Ave., New York 17, N. Y.
Plainfield, N. J. New Haven, Conn.
Boston, Mass.

SEARCHLIGHT SECTION

REPLIES (Box No.): Address to office nearest you
NEW YORK: 330 W. 42nd St. (36)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)

POSITIONS VACANT

ENGINEERS-SURVEYORS: Party Chiefs, Instrumentmen, Rodman and Chairman for work in the Southern California Area on Subdivision and Heavy Construction. Good pay and conditions. Contact James J. Twombley, International Union of Operating Engineers, Local Union No. 12, 2323 West Eighth Street, Los Angeles, California. Phone: DUnkirk 8-3261.

ENGINEER OR Draftsman, civil or mechanical (piping), experienced in construction work, field or office. Write P. O. Box 126, Wilmington, Delaware.

EXPERIENCED STRUCTURAL estimator who wishes to live in California and work for the future with young aggressive company. Shop force approximately 500 men. Year round work in fields of Steel Buildings, Bridges, Tanks and Steel Frame Housing. Only qualified men with ambition needed. Write for details giving employment history. Union Steel Company, 7301 Telegraph Road, Los Angeles 22, California.

POSITIONS VACANT

EXPERIENCED DETAILERS needed for permanent positions with largest independent in Southern California. Excellent employment conditions and opportunities. Write for details giving employment history. Union Steel Company, 7301 Telegraph Road, Los Angeles 22, California.

FLA. REGISTERED structural engineer to share offices with architectural designer. Rent in exchange for small services. Write direct to Harris, 1640 N.W. 19th Ave., Miami 35, Fla. Phone 2-11-38.

WANTED—EXPERIENCED grade foreman on levee construction. Permanent position. Located Clewiston, Florida. Write to: Testa Bros., West Highway #27 and 720, Clewiston, Florida. Phone 1-1259.

PROJECT ENGINEER or Ass't Project manager. Mech Engr, 34; exp industrial Buildings, Power & Chemical Plants. Write P-7220, Engineering News-Record.

ENGINEER-DRAFTSMAN: Wanted by large railroad, college graduate in Civil Engineering, to fill vacancy in drafting room, handling design and detail drawings for railroad buildings and shop facilities. Experience desirable. Write P-7203, Engineering News-Record.

(Continued on page 111)

WANT EXPERIENCED, Structural Steel, Miscellaneous, & Ornamental Iron DETAILERS—CHECKERS
Excellent working conditions, highest salary. Permanent.
CAPITOL STEEL & IRON COMPANY
1726 S. Agnew Oklahoma City 8, Okla.

DRAFTSMEN
STRUCTURAL STEEL DETAILERS
and checkers. Long range work. Top rates for top experienced men. Send resume (in confidence) of work history, detailed experience, etc.
CHARLES COHN & SON
25-20 43rd Ave., Long Island City, N. Y.
TEL: STillwell 4-1686

WANTED
SUPERINTENDENT and FOREMEN
Superintendent for fast growing Mid-west Highway Construction Co. with at least ten years experience in asphalt resurface and concrete widening. Also an asphalt plant foreman and an asphalt road foreman; each with at least five years experience.
P-7214, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

CLASSIFIED SEARCHLIGHT SECTION ADVERTISING

EMPLOYMENT • BUSINESS • OPPORTUNITIES • EQUIPMENT—USED or RESALE

UNDISPLAYED RATE:
(Not available for equipment advertising)
$1.50 cents a line, minimum 3 lines. To figure advance payment count 5 average words as a line.
POSITION WANTED & INDIVIDUAL SELLING OPPORTUNITY WANTED undisplayed advertising rate is one-half of above rate, payable in advance.
PROPOSALS, $1.50 a line an insertion.

INFORMATION:
BOX NUMBERS count as 1 line additional in undisplayed ads.
DISCOUNT OF 10% if full payment is made in advance for four consecutive insertions of undisplayed ads (not including proposals).
EQUIPMENT WANTED or FOR SALE Advertisements acceptable only in Displayed Style.

DISPLAYED—RATE PER INCH:
The advertising rate is $17.10 per inch for all advertising appearing on other than a contract basis. Contract rates quoted on request.
AN ADVERTISING INCH is measured ⅞ inch vertically on one column, 3 columns—30 inches —to a page. E.N.R.

NEW ADVERTISEMENTS: Address New York City Office, 330 W. 42nd St., N. Y. 36, for April 2nd issue closing March 23rd.

WANTED

An Alert Mechanical Engineer with Some Knowledge of Electrical Engineering . . . Must Be a Good Calculator . . .

PHILIPS & DAVIES, INC.
KENTON, OHIO

STRUCTURAL ENGINEER

With 10 to 15 Years Experience in Reinforced Concrete and Structural Steel Design for Electric Utility Work, Write to Structural Engineer

PENNSYLVANIA POWER & LIGHT CO.
Allentown, Pa.

BRIDGE DESIGNERS

Private Consultants require experienced men for work this area. Send experience resume to

P. O. Box 752 Providence, R. I.

POSITIONS VACANT

(Continued from page 110)

IMMEDIATE NEED for Diesel Electric Plant installation and service men with experience on 15 through 100 KW units. Positions overseas. Salaries $7800 and up plus $6 per diem. Page Engineers, 600 Bond Bldg., Washington, D. C.

SEWER AND Water Construction. Foreman, working superintendent or engineer in this field. To work with small company established only five years, located in Cleveland, Ohio. Top salary and bonus. P-7196, Engineering News-Record.

ASSISTANT PROFESSOR to supervise development of new materials testing lab., teach lecture and lab. courses in construction engineering. M.S. degree plus constr. exper. Req'd. Min of $4300 for 9 months. Head Engr. Dept. San Jose State College, San Jose, Calif.

SELLING OPPORTUNITY OFFERED

SALESMAN WANTED in Upper Peninsula of Michigan. Experience preferred in earthmoving and construction equipment sales. Send all particulars and qualifications, photograph optional. Brebner Machinery Co., Inc., Marquette, Michigan.

EMPLOYMENT SERVICE

WANTED-ENGINEERS, Designers, Draftsmen-Structural, Piping, M.E., C.E., E.E. and Industrial, also Teachers and Chemists, Cleveland Engineering Agency, 2132 E. 9, Cleveland.

SALARIED PERSONNEL, $3,000-$25,000. This confidential service, established 1929, is geared to needs of high grade men who seek a change of connection under conditions assuring, if employed, full protection to present position. Send name and address only for details. Personal consultation invited. Jira Thayer Jennings, Dept. L, 241 Orange St., New Haven, Conn.

POSITIONS WANTED

CIVIL ENGINEER, graduate, age 31 with 10 years of experience including cost engineering, inspection work, sewer and water line construction, and engineering administrative work. Minimum salary requirements $48.00. Will relocate. PW-6972, Engineering News-Record.

(Continued on page 112)

GRADUATE ENGINEER WANTED
to learn the Application and Sale of
CLAMSHELL BUCKETS

Industrial applications include rehandling bulk materials such as coal, ore, slag, limestone, coke, cement clinker, fertilizers, chemicals, foundry sand, pulpwood, steel scrap, municipal incinerator refuse, granular bulk materials from ocean vessels, etc.

Construction applications include dredging, excavating, rehandling of concrete aggregates, etc.

Definite opportunities for promotion to attractive paying positions.

Starting salary commensurate with applicant's experience.

Address—Manager of Bucket Sales

Blaw-Knox Equipment Division
of BLAW-KNOX COMPANY

P. O. BOX 1198 PITTSBURGH 30, PA.

DESIGNERS
HIGHWAY and STRUCTURAL

Excellent opportunities for immediate permanent employment with a progressive organization, having a long range program of important engineering work. Experience preferred, but not essential, in engineering design for highways, bridges, airports, industrial, special-purpose buildings, water and sewage treatment plants. Engineers needed also with experience in writing specifications and reports.

Desirable working conditions at salary commensurate with ability. Write to nearest office for application blank. All replies will be held confidential and *will be promptly acknowledged.*

CAPITOL ENGINEERS

25 W. CHURCH ST. DILLSBURG, PENNSYLVANIA
5 ST. PAUL ST. ROCHESTER 4, NEW YORK

COST ENGINEER
EXPERIENCED
C.E. GRADUATE

Must be capable of estimating foundations and heavy construction. Analyze and prepare monthly project cost statements, progress schedules and material lists.

Excellent salary.

State qualifications and references in first letter.

P-7193, Engineering News-Record
330 W. 42 St., New York 36, N. Y.

STRUCTURAL STEEL SALES ENGINEER

Exceptional opportunity for a thoroughly experienced structural engineer who can estimate & sell structural steel for all types of buildings, fabricated & erected.

Plant is long established, has large capacity, located in metro N. Y. area. State experience & salary for personal interview at our expense.

SW-6708, Engineering News-Record
330 W. 42 St., New York 36, N. Y.

ENGINEERS

Top personnel required by large Engineering Corporation in California in the following classifications:

1—MECHANICAL
1—STRUCTURAL
1—ARCHITECTURAL
1—CIVIL

Engineer to be in responsible charge of design development of several large industrial projects concurrently. Must be capable of exercising satisfactory supervisory control over several able subordinates and must be responsible for the planning and organizing of engineering design, including the preparation of plans and specifications and checking.

Must have an engineering degree from a recognized school and at least 10 to 15 years of broad engineering practice including supervisory and administrative work.

Write giving full qualifications and salary expected.

P-7088, Engineering News-Record
1111 Wilshire Blvd., Los Angeles 17, Calif.

DESIGNERS and DRAFTSMEN

Having experience in industrial engineer-architects' offices. Specialists required for plumbing, sheet metal, process piping and boiler houses.

SPECIFICATION WRITER

Mechanical trades specification writer experienced in handling complete specifications for mechanical trades on competitive bid projects.

COST ESTIMATOR

Estimator and plan checker for mechanical trades. Industrial experience required.

All employees work on hourly rate basis with time and one half for overtime. Now working fifty hours per week.

GIFFELS & VALLET, INC.
1000 Marquette Bldg., Detroit 26, Mich.

STRUCTURAL ENGINEERS
SENIOR ARCHITECTURAL DRAFTSMEN
MECHANICAL ENGINEERS
SANITARY ENGINEERS

We have several openings for men experienced in general building design.

Good working conditions—Overtime after 40 hours per week.

Give complete details of experience in first letter.

BELLMAN, GILLETT & RICHARDS
Architects and Engineers
518 Jefferson Avenue Toledo, 4, Ohio

STRUCTURAL ENGINEERING

ARCHITECTURAL ENGINEERING
OUR COURSES of instruction by mail HAVE HELPED THOUSANDS to better positions and to pass State Board Examinations. *Forty-third year. Write today.*

WILSON *Engineering Corp.*

College House Offices - HARVARD SQUARE, CAMBRIDGE, MASS.

WANTED:
Marine Construction Superintendent
Age 35 to 40. C.E. Degree, with at least ten years experience in heavy construction such as bridge foundations, breakwaters, piers and docks. Must have had considerable time in full charge of projects. Permanent position. Salary $6500 to $7500 with Life Insurance, Hospitalization and Retirement Benefits. Location Middle West.

P-6815, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

WANTED
General Asphalt Paving Superintendent
Excellent opportunity for experienced man in Asphalt Resurfacing and General Road Construction work.
Southern Connecticut Area. State Age and Qualifications. Reply to
P-6976, Engineering News-Record
330 W. 42 St., New York 36, N. Y.

POSITIONS WANTED
(Continued from page 111)

CH CONST. Eng., Registered, 20 yrs. exp. heavy construction. Estimating, planning, buying and supervision. PW-7198, Engineering News-Record.

ARCHITECTURAL-STRUCTURAL Engineer experienced in industrial and commercial design, field-supervision and estimating desires position with Architect-Engineers or Constructors. PW-7209, Engineering News-Record.

GENERAL CONTRACTOR'S Estimator desires permanent position in Louisville, Cincinnati, Lexington area about June 1st. Top references and complete bidding record available. Increasing your business is my job. PW-7200, Engineering News-Record.

ELECTRICAL DRAFTSMAN 10 years experience estimating, purchasing, design and supervision of Industrial and Commercial work. Desires field or office position with contractor or consulting firm. PW-7177, Engineering News-Record.

EXPERIENCED ENGINEER, M. I. T., C.E. graduate wants permanent and responsible position in construction or allied fields. A proven executive, top-flight estimator, project manager, superintendent, with 17 years experience. Thorough knowledge of government contracts. Salary requirements $10,000, varying with location. PW-7230, Engineering News-Record.

SECRETARY, STENOGRAPHER, female. Technical dictation. Engineering and construction experience. PW-7229, Engineering News-Record.

CARPENTER FOREMAN or Supt. on smaller jobs. In the building line 28 years. Experienced from concrete to finished job. Read plans perfectly. Can handle men. Limited knowledge of engineering. Available immediately. N.Y.C. vicinity. PW-7228, Engineering News-Record.

STRUCTURAL ENGINEER, age 50, thorough supervisory experience with large consulting and construction organizations on power plants, chemical plants, large industrials, airfields, waterfront structures, dams, bridges, etc. Excellent estimator, spec writer. Desires permanent responsible position. Salary range $8,000 to $10,000. PW-6971, Engineering News-Record.

SUPERINTENDENT OR Assistant to General Superintendent. 20 years heavy construction. Excavation, drainage and paving. Know men, methods, equipment and cost. Available April 1st. PW-6973, Engineering News-Record.

SUPERINTENDENT, 25 years construction experience, bridges, dams, treatment plants, pumping stations, concrete structures, sewer and water systems, heavy excavation, water front work, etc. Just off eleven million dollar warehouse job. Good organizer, know men and equipment. Familiar with labor and material costs and distribution. References upon request. Any location. Available immediately. PW-7022, Engineering News-Record.

CIVIL ENGINEER desires position with Consultant or Engineering Department. Degree, experienced construction, estimating, limited design. Age 31, Married. Prefer Midwest or Texas. PW-7113, Engineering News-Record.

Executive Engineer - Project Manager
Age 40, B.S.C.E., excellent health. Broad experience in top administrative, organizational and promotional assignments on large Industrial-Chemical plants here and abroad. Excellent references and connections. Desire permanent connection.
PW-7224, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

SUPERINTENDENTS AND PROJECT MANAGERS TRAINING COURSE
All instructions by mail. Send today for sample lesson and complete details
GEO. E. DEATHERAGE & SON
411 S. 5th Ave. Lake Worth, Florida

POSITIONS WANTED

CIVIL ENGINEER graduate, experienced, three years building construction, one year consultant firm, desires position in Met. New York or New Jersey with responsibility and future. PW-7227, Engineering News-Record.

ASPHALT PAVING Superintendent and General Road Construction. 25 years experience with men, equipment and costs. Prefer Southern New England or New York State. Personal interview for details. Write PW-7225, Engineering News-Record.

GENERAL CONSTRUCTION-Superintendent. 30 years experience in all phases of construction Inc. Resid. State and foreign. Desires connection with medium or smaller. Preference West, Pa. or E. Ohio. May relocate South if necessary. Excellent references. PW-7226, Engineering News-Record.

EXECUTIVE MANAGER-Superintending Engineer. Qualified journeyman in several Trades before becoming C.E. with Lic. Prof. Engineer in Michigan and New York. Very cost conscious as result of intimate knowledge of effective estimating and accumulation of accurate unit-cost records. Reduces delays in "Preparation" by reviewing plants and details of all Trades to assure complete coordination in the field. Selects correct and effective tools and equipment. Cost-plus work not preferred. Scotch-English extraction. Desires position of responsibility with effective authority on Housing, Hospitals, Industrial Construction and Bridges. Enquiries considered confidential. PW-7240, Engineering News-Record.

SUPERINTENDENT, 15 years Heavy Construction experience Bridges, Tunnel, Sewers, Shoring Foundations, Concrete, structural steel. Highest references. Available April 15th. West Coast preferred. PW-7069, Engineering News-Record.

CIVIL ENGINEER—M.S. 28, Married, 2.5 yrs. Foreign experience in Highway construction 1.5 yr. Domestic experience with State Highway Department in Road Design & Traffic Analysis—Languages. Desires permanent position in Highway or General Construction. Foreign or Domestic. Available immediately. PW-7244, Engineering News-Record.

WORK WANTED

Licensed Surveyor with party available for preliminary and location surveys on Highways and Railroads. WW-7147, Engineering News-Record.

BUSINESS OPPORTUNITIES

Experienced Engineers, Designers or Contractors interested in associating actively and financially conducting business of well established Architects-Engineers Design Office located New York—Floating Equipment—Port Developments—Power Plants, etc. Reply with full details, experience, references, etc. BO-7041, Engineering News-Record.

Don't Forget the Box Number

WHEN answering the classified advertisments in this magazine, don't forget to put the box number on your envelope. It's our only means of identifying the advertisement you are answering.

EQUIPMENT BARGAINS

Largest Inventory in Rocky Mountain Empire. One of the West's most modern and complete equipment repair shops.

All Items are Below Present Ceiling Prices

1—Cat D7 Diesel Tractor with Cat #24 CCU, radiator shroud, dozer arrangement, lights and starter. Rebuilt and guaranteed $10,000.00

1—Cat D8 Diesel Tractor with LeTourneau DD CCU. Good working condition ..$9,850.00

1—Cat D8 Diesel Tractor, 2U series, with new Trackson Pipelayer. Rebuilt and guaranteed $19,500.00

1—International Harvester TD18 Tractor with Bucyrus Erie Hydraulic "A" Dozer. Good working condition $7,000.00

1—Cat #12 Motor Grader with cab, scarifier, 13:00x24 tires, front and rear. Rebuilt and guaranteed $8,000.00

1—Cat #12 Motor Grader with cab, 13:00x24 tires, rear; 9:00x24 tires front. Rebuilt and guaranteed $9,500.00

McCOY CO.
Caterpillar Dealer
Phone AComa 3751
6000 Colorado Blvd., Denver

Courtesy Chicago Herald American

ARE YOU PREPARED FOR THE SPRING THAWS AND RAINS?

Will your jobs be flooded out this Spring when the snows melt? Don't be caught "short". RENT or BUY your PUMPS from ECA. We have a LARGE SUPPLY OF PUMPS, all sizes, from 1½" up to 12", electric or gas, centrifugal, vertical and horizontal, diaphragm, sludge and sump pumps. You name the type—we have it for RENT or SALE. See Partial List Below:

THIS MONTH'S SPECIAL
PUMPCRETE
1—Mdl. 190 Rex Single Pumpcrete #CP114, main power plant 4 cyl. Wauk. gas eng., with remixing hopper powered 4 cyl. LeRoi gas eng. Recommended pumping distance 1,000', w/7" pipe. Max. vert. lift 110', cap. 23-30 cu. yds. per hour.

PUMPS, CENTRIF., GASOLINE
1—8" Gorman Rupp, Mdl. H18, Hercules Mdl. JXB gas eng., 125,000 GPH @ 25' hd.
2—6" C.M.C., Hercules gas eng., Mdl. QXC-5, cap. 90,000 GPH @ 25' hd.
1—4" Rex #50M, 4 cyl. Wauk. gas eng., 750 GPM @ 25' hd.
1—2" Marlow, 3½ HP "Mercury" eng., 115 GPM @ 10'.

PUMPS, CENTRIF., ELECTRIC
1—12" Dayton Dowd, vert., 50 HP 3/60/220/440 motor. Cap. 6,000 GPM at 19'; 4250 GPM @ 32'.
1—8" Ing. Rand size 8LFV, 50 HP 220/440/3/60 motor. Cap. 2,000 GPM @ 80' hd.
1—4" suc. 3" disch. Weinman, 7½ HP 3/60/220/440. Cap. 420 GPM @ 40'

BOILERS
Horizontal Self-contained and Vertical Boilers, from 1 to 125 HP.

CRANES, CRAWLER
We have a large stock of *Crawler Cranes* from ½ to 2½ yd., Gas and Diesel powered, for RENT or SALE.

CRANES, LOCOMOTIVE
1—30 ton Mdl. F OHIO, 50' boom, oil fired, Nat'l. Board 200# boiler.
1—25 ton Industrial Brownhoist Type G, 40-50-60' boom, Nat'l. Board Boiler 150#.

DERRICKS
Several good *Guy* and *Stiffleg* Derricks, from 10-30 ton cap. Complete with hoisting equipment.

GENERATOR, 75 KW DIESEL AC
1—75 KW Diesel Generator, 220/440/60/3, power Cat. D-13000 Diesel eng., with gas starting eng. & control panels. Generator completely rewound. LATE MODEL. SAVE THOUSANDS of $$$$$$ FROM COST NEW PRICE. EXCEL. SHAPE.

Partial list only—please let us quote on your requirements

ECA
EQUIPMENT CORPORATION OF AMERICA

CLIFTON HEIGHTS, PA.
Box J-608, Sub. of Phila.
Phone MAdison 6-2200

PITTSBURGH 30, PA.
Box J-933
Phone FEderal 1-2000

CHICAGO 12, ILL.
1155 S. Washtenaw Ave.
Phone NEvada 8-2400

NEW YORK 7, N. Y.
30-J Church St.
Phone WORTH 2-9036

100 TON STIFFLEG DERRICK

175' boom. Mast 74'5". Legs 105'6". Sills 75'9". 30' bullwheel. With 200 HP 3 drum electric hoist 3/60/440. With 30 HP Independent elec. swinger.

Derrick will lift 12 tons at 178' radius.

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St. St. Louis 1, Mo.

ASPHALT & OIL TANKS

IN MO.—TEX.—N. Y.—FLA.
33—8000 & 10,000 GAL. R. R. TANK CAR TANKS.
6—HORIZ. 15,000 & 20,000 GAL.
9—VERT. 15,000, 32,000, 120,000 GAL.
LESTAN CORP., ROSEMONT, PA.

FOR SALE

20,000' of 3 Conductor 2/0 Steel Taped Parkway Cable, Type RJFJ, 3000 V.
3,500' of 3 Conductor #2 Steel Taped Parkway Cable, Type RJFJ, 3000 V.
2—45 KVA, 2400 V. Primary 480/240 V. Secondary, 3 Phase, Dry Transformers
2—75 KVA, 2400 V. Primary 480/240 V. Secondary, 3 Phase, Dry Transformers
5—112½ KVA, 2400 V. Primary 480/230 V. Secondary, 3 Phase, Dry Transformers
3—100 KVA, 2300 V. Primary 460/230 V. Secondary, Single Phase, Oil Cooled Transformers
3—50 KVA, 2400 V. Primary 480/240 V. Secondary, Single Phase, Oil Cooled Transformers
3—100 KVA, 2400 V. Primary 480/240 V. Secondary, Single Phase, Oil Cooled Transformers
50—Misc. 2, 3, 5 & 15 KVA Single Phase Transformers. Also numerous switches, metal switch cabinets, 50 and 100 amp. cutouts, circuit breakers, etc.

Subject to prior sale

FRAZIER-DAVIS CONSTRUCTION COMPANY
1319 Macklind Avenue, St. Louis, Mo. STerling 1950
Box 135—Grahamsville, New York Grahamsville 2861

FOR SALE

SHOVEL & BACKHOE ATTACHMENTS

22-B Backhoe
Osgood 200 Backhoe
Osgood 200 Shovel
Unit 1020 Backhoe
Unit 514 Backhoe
N. W. 6, 25 & 80-D Shovel
N.W. 6 & 25 backhoe
P&H 655 Shovel
Manitowoc 3500 Std. shovel
LS40 Shovel—New
Bay City 65 & 45 Shovel
P&H 255 Shovel & Backhoe
Lorain 41 Backhoe & shovel
Lorain 820 & 79 Shovel

A. C. R. Co.
19615 Nottingham Rd., Cleveland 10, Ohio
KEnmore 1-8000

PUMPCRETES

Rebuilt Current Models
For Sale or Rent
CONCRETE EQUIPMENT COMPANY
312 E. Wisconsin Ave.
Milwaukee 2, Wis.

Used Shovel Attachment

1—LORAIN Model 40.
Excellent Condition
HODGE & HAMMOND, INC.
720 Garrison Ave. N. Y. 59, N. Y.
PHONE: Kilpatrick 2-2400

PILING

FOR SALE

Model 4500 Manitowoc Draglines, caterpillar-mounted, with 140 booms', buckets, Caterpillar engines, 5 cu. yd. 100-ton capacity, one and two years old.

Model 3500 Manitowoc Speedcrane, Liftcrane, clamshell, dragline combination, 2½ cu. yd. 60-ton capacity, new October, 1950.

Model 803 Koehring Liftcrane, Clamshell, Dragline combination, 2 cu. yd. 50-ton capacity.

All located in Florida. Reply to

FS-3844, Engineering News-Record
330 W. 42 St., New York 36, N. Y.

STEEL SHEET PILING

Available from stock. Will also roll to size and specifications.

LARSSEN Arch Web



High section modulus • Very great durability • Great longitudinal strength • High rigidity • Uniform interlock

UNION Straight Web

For cellular construction
High interlocking strength

Let us design your sheet piling structure ECONOMICALLY.

LARSSEN PILING CORP.
205 East 42nd St., N. Y. 17, N. Y.
Phone: MU 4-7700

FOR SALE

STEEL SHEET PILING

(NO CMP ALLOTMENT NEEDED)

AT CHIEF JOSEPH, WASHINGTON

Shipped New—Used Only One Job

CARNEGIE Length	MP-101 Pcs.	MP-102 Pcs.	TEES Pcs.
72-68 ft.	65	81	0
65-60 ft.	800	58	1
55-50 ft.	65	3	7
45-40 ft.	645	0	6

Also quantity 35 Ft. and shorter—Quick Shipment. Regardless of job, location. Write, Wire or Phone

MISSISSIPPI VALLEY EQUIPMENT CO
509 Locust St.
CHestnut 4474, St. Louis 1, Mo.

FOR SALE

2-Lima 2400 Diesel Powered DRAGLINES

130' boom, 5 yd. capacity buckets. Serial nos. 32435 and 32495.

CAPITOL COAL COMPANY
42 E. Independence St. Shamokin, Pa.
Tel: Shamokin 8-0521

WANT BUY

ALL SECTIONS
STEEL SHEET PILING
PILE HAMMERS & EXTRACTORS

DARIEN CORP.
60 E. 42nd St. New York 17, New York

FOR SALE OR RENT

Rebuilt and in A1 Condition

Cat.	D7 Bulldozer	#4T5988
Cat.	D7 Bulldozer	#4T6542
Cat.	D8 Tractor	#8R8926
Cat.	D8 Tractor	#8R8933

WILLIAMS CONSTRUCTION CO.
Middle River, Maryland Phone: Essex 1310

STEEL SHEET PILING

RENT STEEL SHEET PILING

"Faster From Foster"—the exact lengths and sections—all standard makes—of Rental Piling to meet your job needs. Also Rent: Pile Hammers and Pile Extractors.

RAILS • TRACK ACCESSORIES • PIPE • WIRE ROPE
L. B. FOSTER CO.
Pittsburgh 30, Pa. New York 7, N.Y.
Chicago 4, Ill. Houston 2, Tex.

BOOMS - DERRICKS - TANKS

Crane booms for all makes of cranes—stiff leg derricks—elevated water tanks with hemispherical bottoms — flat-bottomed storage tanks. Prices competitive.

THE DEL-STRAT CORP.
Box 195 Delaware, Ohio Phone 23150

FOR SALE

Marion Steam Crane (Crawler)

Model 32 60' Boom, W.N. Best Oil Burner
50 H.P. Boiler

OLE HANSEN & SONS, INC.
Pleasantville, N. J.

STEEL SHEET PILING

4000 PCS. CARNEGIE MP STRAIGHT WEBB
MP 101—40 to 72 FT. WEST COAST.
479 PCS. Z-27 LB.—30 & 40 FT., EAST COAST.
562 PCS. DP-2—30-45 FT., GULF COAST.
109 PCS. AP-3—60 FT., N.Y.
570 PCS. DP-2—30-40-60 FT. N.Y.
All Sections Bought - Sold - Rented
R. C. STANHOPE, Inc.
60 E. 42nd St. New York 17, N. Y.

We do a Nation-Wide business in

STEEL SHEET PILING

IMMEDIATE SHIPMENT

3700 pcs. 72-16 ft. Carn. MP-101-West Coast
418 pcs. 60-30 ft. Carn. M-116-Illinois
310 pcs. 35-26 ft. Beth. DP-2-Texas
487 pcs. 32 ft. Inland I-23-Chicago
383 pcs. 16-15 ft. Carn. M-112-Missouri

Other lengths & sections used & new at other locations in United States for rent.

We have Nation-wide reputation for effecting QUICKEST SHIPMENTS

All sizes Vulcan & McKiernan Pile Hammers & Extractors for rent—Shop Rebuilt
Regardless of location of job. Wire, Write or Phone

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St., Chestnut 4474 St. Louis, Mo.

WORLD'S LARGEST INVENTORY

ELECTRIC EQUIPMENT CO.
P. O. BOX 51 ROCHESTER 1, N. Y.

1950-51 EQUIPMENT AVAILABLE NOW

LONG ORDERED EQUIPMENT NOW ARRIVING. RELEASES FOR SALE REPLACED 1950-51 EQUIPMENT SOME OF WHICH HAS SEEN LITTLE OR LIGHT USE PLUS OTHER EQUIPMENT OF VARIOUS AGES TOO NUMEROUS TO LIST

IMMEDIATE SHIPMENT

D-7 and D-8 Cat Bulldozers
6—Euclid Bottom Dumps, Mod 71FDT
6—DW20 Cat Tractors w/ W20 Bottom Dump Wagons
6—Mod 80D Northwest Shovels and/or Cranes
12—Mack Dump Trucks, Model LJ
12—Sterling Dump Trucks, Model HWS
4—Euclid Rear Dumps, Model 8TD
1—Mack Dump Truck, Model LR
2—Hough Payloaders, Mod 77
6—Mod 80 Cat Scrapers
6—Lorain Truck Cranes, Mod MC414
1—BX Mack Flat Truck w/ power winch
20—"Red Devil" Lighting Plants
1—Hetzel Screeding Machine, Mod U25
1—Pumpcrete Machine, Rex Mod 200 w/ pipe and fittings
2—41B Bucyrus Erie Steam Cranes, complete piledriving outfits
20—Pumps, various makes and sizes
50—Buckets, dragline, clam shell, etc.

Many other items if our replacements continue to come in.

ALL SUBJECT TO PRIOR SALE OR ASSIGNMENT TO JOBS

Write, Phone, or Wire

ELMHURST CONTRACTING Co. Inc.
53-09 97th PLACE
CORONA 68, L. I. N. Y.
NEwtown 9-9800-1-2-3-4

FOR SALE

Portable Concrete Mixers

1.—1948 Rex.—16-S—Completely Reconditioned and Painted. Equipped with Powered Cable Shaker-Skip.
1.—1948 Ransome—16-S—Completely Reconditioned and Painted. Equipped with Powered Cable Shaker-Skip.

$1,250.00 Each F.O.B.

SEBOLT
CONCRETE PRODUCTS, INC.
Brown's Lane South River, N. J.
SO. 6-2212

---

300 TPH DIESEL PORTABLE SCREENING & CRUSHING PLANT
32" x 40" PRIMARY CRUSHER.
12' FEEDER & MURPHY DIESEL.
10" x 36" SECONDARY CRUSHER.
40" x 24" ROLLS.
4' x 14' D.D. VIB. SCREEN.
G.M. DIESEL.
ALL MOUNTED PNEU. TIRES
COMPLETE BINS—ELEVATORS—CONVEYORS
Mfg. By AUSTIN WESTERN
J. C. SEALY 60 E. 42nd St., N. Y. 17, N. Y.

FOR SALE
Barber Greene
ASPHALT MIXING PLANT
Complete, gasoline engine driven, semi trailer mounted, 20 tons per hour. Inquire
THE BREWER CO. OF FLA., INC.
3810 N.W. 21st St. Miami, Fla.
Ph: 64-8612

Koehring Shovel 1½ Yd. Cat Diesel New 1951 $35,000.00
Marion Shovel ¾ Yard Crane & Backhoe G. M. Diesel extra large tracks new 1948 ..... $17,000.00
Lorain Shovel ¾ Yd. and Backhoe Cat Diesel new 1950 ..... $17,000.00
Unit ⅝ Yard Crane new 1951 ..... $7,000.00
2—Unit ⅛ Yard Backhoes, Diesel $8,500.00
H. D. 20 with Pusher block 17 Yard La Plante Choate wagon, Used 400 hrs. $28,000.00
H. D. 19, new motor, new tracks, angleblade $10,000.00
3 Garwood Carryalls 11 Yards $3,500.00
H. D. 9 Angleblade. Used 4 months $9,000.00
H. D. 5, new 1952 new motor $6,500.00
5 H. D. 14 Bulldozers with blades $3,500.00 to $6,500.00
Cat D. 6 Angleblade new 1951 ..... $7,500.00
Grader Cat #12 ..... $7,500.00
Hough Loader 1½ Yd. 4 wheel drive $6,500.00
3 Terra Cobras, new motors $6,500.00
Griffin Well Point System
Also Trucks—Rooter—Sheep Foot Roller—Concrete Mixer—Fordson Tractor—Galion Roller
Contractor Disposing Surplus Equipment

FELIX CLAUSS & SONS
4400 "D" Street
Philadelphia 20, Penna.
Phone: Michigan 4-7963

LIQUIDATION SALE
Equipment priced to sell in excellent condition
3—Caterpillar DW20 Tractors & W20 Bottom Dump Wagons
1—Euclid 38FDT Tractor & 89W Bottom Dump Wagon
3—International TD24 Tractors W/F Bucyrus Erie Bullgraders & PAPCU's
2—International TD24 W/F Bucyrus Erie Push Blocks & (1) W/F PAPCU's
3—International TD-18A Tractors W/F Heil Angle Dozers & PAPCU's
1—Worthington 500 Diesel Compressor on Rubber
1—Bucyrus Erie TDO112 Tamping Roller
1—Bucyrus Erie CR-4 Ripper
1—Rogers Low Deck 60 Ton 16 Wheel Trailer & KR12 Internation Tractor
1—220 Gal. Tank Trailer W/F Gas Engine & Pumps for watering Roads, etc.
Misc. Light Plants, Airtools, Chain Saws & Water Pumps.
Equipment available immediately located western Penna. All Machinery Purchased New
FS-7011, Engineering News-Record
330 W. 42 St., New York 36, N. Y.

FOR SALE

EXCELLENT PHYSICAL & OPERATING CONDITION

23 Austin-Western Automatic Air-Operated Dump Cars 20 Cubic Yards Capacity, AB Air Brakes, Lift Door Std. Gauge.
13 Austin-Western Automatic Air-Operated Dump Cars 20 Cubic Yards Capacity, AB Air Brakes, Lift Door with unloading aprons, Std. Gauge.
2 Jordan Standard Spreader Cars, 50 ton Capacity, AB Air Brakes, Enclosed Operator's Cab, Std. Gauge.

MARSHALL RAILWAY EQUIPMENT CORP.
50 Church St. N. Y. 7, N. Y.
Cortlandt 7-8090

FOR SALE

New Wire Rope Blocks

12" Snatch Blocks with Hooks	$13.50
14" Snatch Blocks with Hooks	18.50
16" Safety Snatch Blocks with Shackles	20.00
14" Double Blocks with Shackles	13.00
18" Single 20 Ton with S. Shackle	25.00
18" 3-Sheave 30 Ton with Shackle	50.00
18" 4-Sheave 30 Ton with Shackle	75.00
#32 Drop Forge Hooks, New	2.00

ABERTHAW COMPANY
133 Southampton St. Boston 18, Mass.

FOR SALE

New and Used material—Immediate delivery from stock Angles, Channels, I and WF Beams, especially for Contractors needs

H BEAMS PILE SECTIONS

28 PIECES 12" BPS 53 LB. 60/70 FT.

Phone or Wire your steel requirements

We are also interested in purchasing your surplus material.
We assure you our prices will be the best obtainable.

HY DRACHMAN STEEL CORP.

Warehouse
14-23 34th Avenue
Astoria, New York
AStoria 8-4484 8-8023

Sales Office
563 East Tremont Ave.
New York City, N. Y.
CYpress 9-5440

Get a **COMPRESSOR**

TELEPHONE Union 5-4848

STATIONARY-PORTABLE FROM COMPRESSOR MEN

- ELECTRIC
- STEAM
- GAS - WORTHINGTON - IR
- DIESEL - IR - WORTHINGTON

50 YEARS OF SERVICE

20 Lbs to 3000 Lbs
30 CFM to 2500 CFM

RENTAL
RENTAL PURCHASE

AMERICAN AIR COMPRESSOR CORPORATION

DELL AVE & 48th ST NORTH BERGEN N J

FOR RENT

MANITOWOC CRANES

Model 3500—40 to 60 ton cap. 50′ to 125′ boom—20′ or 30′ jib Manuel controls — Independent booms Torque converters

McCARRICK BROTHERS INC.

1700 E. Ridge Pike
Norristown, Pa.

P. O. Box 291
Phone 8-4231

FOR RENT

New Model 3500 Speederane, dragline, clamshell and lifterane, 60-ton capacity.
New Ingersoll Rand 600′ Gyro-Flo Air Compressor.
New Lorain Truck Crane, 25 Ton capacity.

FOR SALE OR RENT

Marion 392 and Koehring 803 dragline, clamshell, lift crane and pile driver combinations. McKiernan-Terry 5-5 and 11B-3 Pile Hammers.

Reply to:

Clemens Construction Co.
P. O. Box No. 266, West New York, N. J.

FOR SALE

GALION "102" MAINTAINER, Serial #E88175, excellent tires, completely overhauled, new UD engine.
GALION "102" MAINTAINER, Serial #F90558, fair tires, recent overhaul.
ALLIS-CHALMERS AD3 MAINTAINER, Serial #1169. Good tires, recently overhauled.
GALION "101" MAINTAINER, Serial #M2815, 3 months rent pays for it.
LeTOURNEAU AD3 TRACTOR CRANE, 10-Ton, 30 Ft. boom, 1400 x 20 Dual Tires, Serial #C3908 AD3G.
ALLIS-CHALMERS HD 14C TRACTOR, Serial #5718, with Buckeye Dozer, Serial #5097, Model 510.
ALLIS-CHALMERS HD-14 C TRACTOR, Serial #HD14C-6193 with DD PCU #5943.
CMC 3-TON HANDI-CRANE, Serial #104.

ALL AVAILABLE ON RENTAL-PURCHASE OPTION

WANTED

25-TON LOWBOY TANDEM SEMI-TRAILER, prefer skeleton type with 20" wheels.

HANSEN AND CALBRAITH

607 W. Buffalo Ave., Cleburne, Texas. Ph. 1214
1205 W. Ninth Street, Cisco, Texas. Ph. 171

RAILS-TIES

TRACK ACCESSORIES

PIPE

RAILS *New and Relaying*

TRACK SUPPLIES · STRUCTURAL STEEL · RAILS

TRACK MATERIALS AND ACCESSORIES CARRIED IN STOCK

SWITCH MATERIAL • SPIKES & BOLTS • TRACK TOOLS • TIES • TIE PLATES • BUMPERS • COMPLETE SIDE TRACKS

BUILDERS STEEL SUPPLY CO.
4201 WYOMING • P.O. BOX 188 • DEARBORN, MICH.

FOR SALE—*Immediate Delivery*

C. I. Water Pipe A.W.W.A. Standard
BELL & SPIGOT— 10 inch, 12 inch, 16 inch, 20 inch, 36 inch and other sizes
FLANGED PIPE— 4 inch, 6 inch, 8 inch, 10 inch, 12 inch

C.I. Water Pipe Fittings—B & S—and Flanged—All kinds and sizes
SOIL PIPE—EXTRA HEAVY
8 Inch—10 Inch—12 Inch—16 Inch
The above subject to prior sales

TAGCO, INC.
111 Front Street Hempstead, L. I., N. Y.
Tel.—Hempstead 2-5535 or 2-8357

FOR SALE

WAYNE ½ Yd. Wagon Crane-Shovel-Hoe Combination $10,000.00

ANDERSON EQUIPMENT CO.
P.O. Box 1737 Pittsburgh 30, Pa.
Phone: LEhigh 1-6020

NEW—RAILS—Relayers

All sizes and weights. Also frogs, switches, spikes, bolts, tie plates, contractors' and mine equipment carried in stock.

M. K. FRANK

480 Lexington Ave. New York, N. Y.
Reno, Nevada

Park Bldg. Pittsburgh, Pa.
Carnegie, Pa.

EST. 1904

DAVIDSON

PIPE COMPANY INC.

ONE OF THE LARGEST STOCKS IN THE EAST

Seamless and Welded ⅛" to 26" O.D.
All wall thickness Manufactured.
Specialty large sizes.
Cutting — Threading — Flanging — Fittings — Valves.

Call GEdney 9-6300

50th St. & 2nd Ave., B'klyn 32, N. Y.

Used EUCLIDS for Sale

13-Yard Bottom Dump
22-Yard End Dump

Attractive prices

FEHRS TRACTOR & EQUIPMENT CO.
1809 Cuming Street, Omaha, Nebraska
Telephone—Atlantic 3127

IMMEDIATE SHIPMENT

RAILS NEW RELAYING

SWITCH MATERIAL

ALL TRACK ACCESSORIES

MIDWEST STEEL CORPORATION
502 DRYDEN ST. CHARLESTON 21, W. VA.

2—**Steam Whirleys** 18′ Bull Gear, Boiler 66" x 10′ 6" can be mounted on barge, now on 16′ track gauge can be seen in operation.
Bucyrus-Erie Steam Crawler Type Pile Driver, new boiler 150# Pressure, 70′ Box Room, 27" with pads. Fine condition, serial near #11,000.
Browning Steam Loco Crane 25 ton cap. Just overhauled.

FS-7115, Engineering News-Record
330 W. 42 St., New York 36, N. Y.

RAILROAD Cross and Switch TIES

Promptly from adequate stocks

NEW and USED *(as available)*

GILLIS & COMPANY
29 East Madison St. Chicago 2

GUARANTEED USED EQUIPMENT

BACKED BY THE WARRANTY OF A GOOD NAME IN THE EQUIPMENT BUSINESS

1. Koehring Cruiser Crane—Model 205—half yard capacity with 40' boom—Chrysler gas power—hydraulic steering—one man controls.....$12,000.00

2. Caterpillar D-4, Serial 6U2100, Series with Model 4A Hydraulic Angledozer. Excellent condition $5,200.00

3. Galion 10-ton, 3-wheel roller. Gas power—electric starting—hydraulic steering—24-inch rolls. Used less than 60 days.....$7,700.00

4. Schramm Model 105 Air Compressor mounted on Diamond T Model 201 Truck, Buda gas power and six 6.50 x 16 pneumatic tires. Just rebuilt..$2,000.00

5. Galion Model 118 Diesel Motor Grader Tandem drive powered by UD-16 Diesel Engine, 14.00 x 24 tires front and rear. Fully enclosed cab and scarifier. New in '52—used only 4 months.....$10,000.00

6. Mack Model LTSW 10-wheel Tractor powered by Hall-Scott engine, burning either butane gas or gasoline. Unit is factory demonstrator used only 2200 miles $9,500.00

We can arrange financing for any of these units.

Your own operator can run this equipment in our Philadelphia yard—no obligation—no high pressure.

Just a good warranty from a good house.

FRANTZ EQUIPMENT COMPANY

50th & Wynnefield Avenue **Phila. 31, Pa.** **GReenwood 7-7200**

CLASSIFIERS: 4—Akins 54" dia., 34' tank, NEW condition, located Nevada.
PORTABLE CRUSHING PLANTS: Pioneer 30 x 42 and one Cedar Rapids 15 x 24, both complete with power.
OVERHEAD ELECTRIC TRAVELING CRANE: Shepard Niles 7½ ton, 80 ft. span, 4 motor, bucket operating, 440 volt, A.C., cage control, in operation now, offered with or without 2½ yd. clam shell bucket. New condition.
LOCOMOTIVE CRANE: Link Belt 25 ton capacity, standard R. R. gauge, gasoline powered, cast steel trucks, air brakes, with or without 1¾ yd. Williams clam shell bucket, thoroughly modern, excellent condition. Located Minnesota.
CAR DUMPER: Link Belt, will dump standard R. R. gondola cars up to 90 tons capacity, transfer table 54 ft. Specifications and photos available.
COMPRESSOR: Worthington DC2, 29/18½ x 21, motor 600 H.P. synchronous, 440 volt, with all auxiliary equipment.
KILNS, COOLERS, DRYERS, PULVERIZERS, CLASSIFIERS, BELT CONVEYORS, FEEDERS.
WE BUY AND SELL EQUIPMENT THROUGHOUT NORTH AND CENTRAL AMERICA

A. J. O'NEILL
Lansdowne, Pa.
Phila. Phones: MAdison 3-8300—3-8301

DIESEL POWER UNITS

H.P.*	Make	Model	R.P.M.
23/4	Sheppard	14	1800
16	G.M.	1-71RA	
60	Buckeye	J	514
62	Caterpillar	D4600	1600
150	Buckeye	E	600

* Continuous horse power

DIESEL MOTORS COMPANY
Port Washington, N. Y. PO 7-2000

FOR SALE

1—Adnun Blackton Paver, Serial No. 1300 .....$6,850
1—Adnun Blacktop Paver, Serial No. 1442 5,625
1—Buffalo-Springfield 3-wheel, 10 ton gasoline roller 1,850
1—Buffalo-Springfield 3-wheel, 10 ton gasoline roller 2,225
1—Buffalo-Springfield 3-wheel, 10 ton gasoline roller 2,225
1—Galion 3½-5 ton roller 1,250
1—Austin-Western 8-10½ ton tandem roller Serial No. T-2448..... 4,375
1—Gledhill Road Drag 440
1—450 Gal. Littleford Pressure Distributor, Trailer Mounted..... 625
1—Barber-Greene Model 44-C Ditcher, completely rebuilt including new engine 11,250

All equipment in excellent working condition and reasonably priced. Equipment may be inspected at yard.

BLACK TOP PAVING CO.
OAKLAND AVE.
WASHINGTON, PA.

FOR SALE

Lorain Model 82, 2 Yd. Power Shovel. Good condition. S-2203 (B)
SALE PRICE F.O.B. LOUISVILLE, KY. $18,500.00

1—Lorain Mdl. L50J Combination 1 Yd. Shovel and Lifting Crane with 60' boom, pendant suspension, 15' jib with Caterpillar D-318 diesel engine. Machine 2 years old. Very good condition. RSP-194 (B)
SALE PRICE F.O.B. PADUCAH, KY. $16,000.00

1—Lorain Mdl. #77 Shovel w/2 cu. yd. Amsco Bucket, Caterpillar diesel engine. 33,000.00 in repairs since use. S-2184 (B)
SALE PRICE F.O.B. LOUISVILLE, KY. $16,000.00

1—International Mdl. TD-24 Crawler Tractor with Bucyrus-Erie P-29 double drum power control unit. RS-1953
SALE PRICE F.O.B. LOUISVILLE, KY. $8,500.00

SYMBOLS
A—Almost new or rebuilt & guaranteed
B—Reconditioned—good running order
C—Fair "As Is"

BRANDEIS
LOUISVILLE MIDDLESBORO EVANSVILLE PADUCAH
BRANDEIS MACHINERY & SUPPLY COMPANY
INCORPORATED
LOUISVILLE Since 1908 KENTUCKY

DEPENDABLE USED MACHINES

SPECIAL:—Gruendler 10x36 roller bearing jaw crusher with A-C gas motor. Come see it!

Lorain 40 dragline	New Pioneer 3x14 scrubber screen	Butler fork truck
Lorain 30 dragline	Phoenix 48" round lifting magnet	45 ton port. bin
Lorain 40 shovel	Cedar Rapids 40x20 roll crusher	3 yd. Dumpcrete
Lorain ½ yd. hoe	Morris 10" manganese gravel pump	Butler Carscoop
Byers 62 shovel	Robins 20" belt tripper	Eagle coal crusher

FOR RENT.—cranes, draglines, backhoes, buckets, and all other accessories.

10002 Southwest Highway TRACTOR & EQUIPMENT COMPANY Oak Lawn, Ill.

---

300 Ton FREON

2—**WORTHINGTON CARBONDALE COMPRESSORS** Type VDA, 13 x 10, 2 cyl., V-Belt dr. With Surface Condensers, "New" 1945. Excellent Condition, $7,500.00 ea.

S. M. DAVIS, 510 LaSalle St., St. Louis, Mo.

FOR SALE

HD-19 Allis-Chalmers Dozer. Baker hydraulic blade. 1949 machine. Very good. $11,500.

Lima 34 shovel, ¾ yd. GM Diesel.

Lima 1201 drag, Cummins Diesel.

Northwest 95, w/ 75' boom, 2½ yd. bucket, Twin City Engine.

4 Cory Model 303 w/ ¾ yd. shovel front, 50' crane boom, ¾ yd. drag bucket Cat. 4600 engine. $8,500.

Insley K-12 shovel attachment, like new. $1,200.00.

Gorman-Rupp 6" self-priming pump, rebuilt and w/ 25' suction hose. $890.00.

SINDLINGER SUPPLY CO.

New And Used Construction Machinery

111 Blackman Street, Clinton, Ind.

Phone 128 Night Phone 1223W

WIRE ROPE

WORLD'S LARGEST STOCK

Immediate Delivery

PRICED BELOW REGULAR MILL PRICES

50,000'— 5/8" 6x19 HC Plow & Impro. Plow
100,000'— 3/4" 6x19 HC Plow & Impro. Plow
70,000'— 7/8" 6x19 HC Plow & Impro. Plow
40,000'—1" 6x19 HC Plow & Impro. Plow
30,000'—1 1/8" 6x19 HC Plow & Impro. Plow
10,000'—1 1/4" 6x19 HC Plow & Impro. Plow
50,000'—1 1/8" 6x19 HC Plow & Impro. Plow

500,000' OTHER SIZES IN STOCK

ALSO CARLOADS OF TURNBUCKLE, SHACKLES & WIRE ROPE CLIPS

WIRE ROPE TRADING CO.

562 TENTH AVE. NEW YORK 36, N.Y.

LONGACRE 5-3050-1-2

FOR SALE

Two (2) Allis-Chalmers Model 54 Road Graders. Equipped with Sweeper.

$3000.00 Each

F.O.B. Staten Island, N. Y.

Condition Excellent

CHARLES MEINERSMANN

47 Highland Ave., Elizabeth 3, N. J.

Phone ELizabeth 3-2295

FOR SALE

LOCOMOTIVE TYPE BOILER

Shell 58" in diameter, overall length 16', 3" tubes. Subject to prior sale or disposition.

F8-7215, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

BRIDGE CRANE

Shepard, 3-Ton, 27'-3" span, twin hook, floor controlled, equipped with 3 two phase, 220 Volt, 60 cycle motors. Also 8-15" I-beams approximately 31'-0" each with attached crane rail.....$3,000.00.

ATLAS CONSTRUCTION DIVISION of ATLAS TILE and MARBLE WORKS, INC.

238 East 26th Street, New York 10, N. Y.
Murray Hill 9-5870

FOR SALE

ADNUN SPREADER

Serial #1185. Carefully Maintained. Sound Condition.

$4500.00

C. H. WINANS CO.

125 Broad St. Elizabeth 4, N. J.

FOR SALE

DEWATERING EQUIPMENT

1¼" Wellpoints, stems & hose Connections—For complete listing write:

P. O. Box 628
Hammond, Indiana

CAN SUPPLY MACK & TIMKEN PARTS

Central States Supply & Equip. Co.

313 South Midler Syracuse, New York
Phone 3-7268

Want To Rent With Option To Purchase 1—34E DUAL DRUM PAVER

Age 3 yrs or less

Williams Construction Co., Inc.

Box 145 Essex 1310 Baltimore 20, Md.

WANTED

Used R.R. track scale

In reply give full particulars.

W-7213, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

SURVEYING INSTRUMENTS

USED • REBUILT • SALE
RENT • REPAIRING

TRANSITS and LEVELS

NEW OR REBUILT

SALE OR RENT

HEADQUARTERS FOR REPAIRS — any make

We will buy or trade in old Transits, Levels, Alidades, etc. Send instruments for valuation.

Write for Catalog NR-33 of new engineering Instruments, Engineering Field Equipment and Drafting Room supplies and NRL-33 for list of *rebuilt* instruments.

WARREN-KNIGHT CO.

Mfrs. of Transits & Levels

136 N. 12th St. - Philadelphia 7, Pa.

GURLEY REPAIR SERVICE

• Send your Gurley instrument to the factory for repair, rebuilding, adjustment, or service. Genuine Gurley parts, properly fitted, available from stock. Factory workmanship and equipment. Estimates submitted. Shipping box furnished free on request.

W. & L. E. GURLEY, Troy, N. Y. Since 1845

→ Write for leaflet "Gurley Repair Service"

SEARCHLIGHT SECTION

This index is published as a convenience to the reader. Every care is taken to make it accurate but SEARCHLIGHT SECTION assumes no responsibility for errors or omissions.

Aberthaw Co., The..... 115
ACR Co. 114
American Air Compressor Corp..... 116
Amerlux Steel Products Corp..... 114
Anderson Equipment Co..... 116
Atlas Construction Division of Atlas Tile & Marble Works Inc..... 118

Bellman, Gillett & Richards..... 112
Black Top Paving Co..... 117
Blaw-Knox Co. 111
Brandeis Machinery & Supply Co.... 117
Brewer Co., of Fla., Inc..... 115
Builders Steel Supply Co..... 116

Capitol Coal Co..... 114
Capitol Engineering Corp..... 111
Capitol Steel & Iron Co..... 110
Central States Supply & Equipment Co. 118
Clauss & Sons, Felix..... 115
Clemens Construction Co..... 116
Cohn & Son, Charles..... 110
Concrete Equipment Co..... 114

Darien 114
Davidson Pipe Co., Inc..... 116
Davis, Samuel M..... 117
Deatherage Son, George E..... 112
Diesel Motors Co..... 117
Del-Strat Corp. 114
Drachman Steel Corp., Hy..... 116

Electric Equipment Co..... 114
Elmhurst Contracting Co., Inc..... 115
Equipment Corp. of America..... 113

Fehrs Tractor & Equipment Co..... 116
Foster Co., L. B.....114, 116
Frank, M. K..... 116
Frantz Equipment Co..... 117
Frazier-Davis Construction Co..... 113

Giffels & Vallet Inc..... 112
Gillis & Co..... 116
Gurley, W. & L. E..... 118

Hansen & Calbraith..... 116
Hansen & Sons, Inc..... 114
Hodge & Hammond Inc..... 114

Larssen Piling Corp..... 114
Lestan Corp. 113

McCarrick Brothers 116
McCoy Co. 113
Marshall Railway Equipment Co.... 115
Meinersmann, Charles 118
Midwest Steel Co..... 116
Mississippi Valley Equipment Co.113, 114

O'Neill, A. J..... 117

Pennsylvania Power & Light Co..... 111
Phillips & Davies Inc..... 111

Sealy, J. C..... 115
Seholt Concrete Products Inc..... 115
Sindlinger Supply Co..... 118
Stanhope Inc., R. C..... 114

Tagco Inc. 116
Tractor & Equipment Co..... 117

Vulcan Iron Works..... 115

Warren-Knight Co. 118
Williams Construction Co.....114, 118
Wilson Engineering Co..... 112
Winans Co., Inc., C. H..... 118
Wire & Rope Trading Co..... 118

IF THERE IS

Anything you want

that other readers of this paper can supply

OR—

Something you don't want

that other readers can use, advertise it in the

Searchlight Section

Sound-powered telephones ease the job

With no electric power or batteries needed, they can be installed in many combinations to help speed work

A sound-powered telephone is just what its name implies. A person's voice actuates a mechanism in the mouthpiece to generate the current required to transmit the sound to another phone or any combination of them. In the illustrations at the right, for instance, a materials dispatcher working for a contractor on a multi-story building job and the hoisting engineer at ground level can converse in a normal tone with one another thus saving a great deal of time, preventing errors and eliminating the need for shouting or signaling.

On other construction sites they are used for communication between job office and job site; between office and parts or tool rooms; between steel connectors and crane tagmen; between ground men and shaft or mine workers and in a host of other installations.

The phones shown here are made by Wheeler Insulated Wire Co. and are available in several types and combinations.

• **Pair phone system**—The simplest basic intercom consists of two (or three) pair phone instruments, such as those pictured here. They are connected on a common ringing, common-talking circuit. Ordinary telephone-type twisted-pair wire is used—either wire connected to either terminal. The handset is removed and a bell-ringing lever depressed. At the end of its travel this lever releases a strip of metal that vibrates like a reed. A vibrating reed generator then sends enough current over the wires to ring the bell in the phone at the other end. Under short line runs (500 ft or under) three instruments may be connected together on a two-wire bridging, common-(code)-ringing, common-talking circuit.

By using two phones, inter-office or inter-plant communications can be maintained without holding up regular Bell telephone systems. They also can thus provide a private line where needed.

• **Multi-serviceintercom**—Master phone instruments are available to provide full selective ringing from any station to any other station with common talking between stations so that conversations may be held on a "conference" basis if desired. Up to twelve stations can be thus installed.

In this setup the call is made by lifting the handpiece, turning a station selector switch to the desired station location and tripping the ringing lever. All stations can, selectively, ring any or all other stations.

• **Master phone systems** consist of a master selector phone like that in the multi-service intercom with as many as eleven substation instruments similar to those in the pair phone system. The master phone can ring any one or, in succession, all of the substations. which can call only in to the master phone direct. Substation calls can be controlled, where desired, by the master phone operator and up to six stations can be operated thus on a conference basis.

• **Accessories and extras**—The Wheeler company provides several other accessories for use in banks, warehouses, hospitals, offices as well as on construction jobs. One of these is a visual neon glow lamp which substitutes for the bell and is particularly useful in extremely noisy locations or for locations where quiet is desired, such as hospitals, libraries, churches, sound stages and guard booths.

A self-contained relay can be factory-installed in place of the bell mechanism. The relay contacts are so terminated that they can be connected to a power supply, external bell, siren, or high-intensity signal lamp of a type within the rated capacity of the relay. Normal arcing at the relay contacts precludes the use of this relay on telephone instruments in hazardous locations.

In all ordinary intercom installations, the manufacturer claims that speech over the Wheeler sound-powered telephones is clear and undistorted to distances up to 20 miles. Handsets and housings are of high impact plastics. Alnico permanent magnets are used in telephone units, ringers and generators. WHEELER INSULATED WIRE CO., INC., WATERBURY 20, CONN.

(*Continued on page 123*)

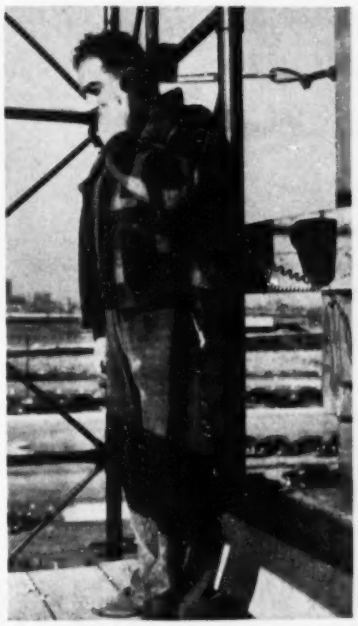

Up above . . .

Contractor's material man talks to truck-unloading crew several floors below with Wheeler sound-powered phone. Plug-in type phone is also available and jacks can be placed on as many floors as needed.

Down below . . .

Hoisting engineer has another phone within easy reach. He receives instructions on what succession of stops to make for pickups and deliveries; can also inform men aloft as to cause of delays, etc.

1,000,000-yd. coal dock completed for Wisconsin's largest power plant

Clocked for 2 hours on 1500' one-way haul, each C Tournapull made 15 trips . . . averaged 11.1 pay yards per trip in the sticky red and blue clay. Despite very soft footing and a 10% adverse grade on 1000' of the return trip, "C's" averaged about 7 minutes for each 3000' cycle. With their power-proportioning differential and positive electric power steer, rigs kept going when spring rains made the job unworkable for other units.

A. F. Keyes Co., South Milwaukee, Wisconsin, working on the A. B. Lynch Co. contract with the assistance of Earthmovers, Inc., Minneapolis, Minnesota, have just completed final grading on their year-long 1,000,000-yd. power plant job at Oak Creek, Wisconsin.

Cutting an access road and rail spur line through 107' clay bluffs and using material to build a 900 x 900' coal dock out into Lake Michigan, each of the 7 C Tournapulls moved 80 pay yards hourly on 3,000' cycles. Contractors' records covering one typical month show each "C" delivered an average of 1,230 loads in 168 working hours over this haul distance. Weighed loads, based on engineers' weight of 3,000 lbs. per cu. yd., figured out at 11.1 pay yards. Production for the month was 13,653 pay yards per machine.

Contractors consider this performance excellent under the tough conditions of grade, material, and weather. In the beginning, loads were made straight down 2-to-1 slopes to the beach. Later, as material could be taken further from the beach along a 3300' access road cut, grades ran from 4 to 35%. Water was a serious problem at all stages of construction. It came from creeks, continually flowing springs, and heavy rains. In addition, Lake

Rain, mud and high water made this one of the toughest dirt jobs ever handled in Wisconsin

Lakefront site of the Wisconsin Electric Power Company's Oak Creek Plant, 14 miles south of Milwaukee. Dirtmoving included leveling beach area (center) for concrete construction now under way . . . moving 1,000,000 yds. of clay from beach access road (far left) and from 2-mile railline (right) into 19-acre coal dock (center) . . . hauling ballast . . . leveling parking areas. Sides of dock are protected by rip-rap and steel piling. The $100,000,000 plant will produce 500,000 kw.

Michigan was at its highest stage in 65 years. One month, contractors lost 55 out of 240 proposed working hours due to rain. One weekend, before pilings were in, a 2-day storm washed out 100,000 yds. of fill. The heavy clay material was always wet and slippery, often sinking the machines hub-deep. Footing was soft . . . in spite of maintenance, haul roads to the dock area were spongy, steep, and rutted. As a result, haul speeds averaged only 6 m.p.h.

"These Tournamatic Tournapulls did a good job," summarized Al Keyes. "They worked when our 3 tractors and scrapers couldn't. Our operators liked them a lot better than Super C's." Keyes, who is partner with his two sons in the company which bears his name, speaks from long experience. Eighteen years ago, he used the first LeTourneau Scrapers bought east of the Rockies. Since that time, as a partner with A. B. Lynch, he's owned Model B, J, YR, FP, and W Carryalls . . . 4 Super C Tournapulls . . . and now 3 electric-control Tournapulls and a rubber-tired C Tournadozer.

J. L. Hake of Earthmovers, Inc., another old-time dirtmover (since 1917), was equally enthusiastic. "The C Tournamatic Tournapull is the best earthmoving machine made," he says. "Its electric controls, plus short turning radius, really make it a mudhog." Hake also liked Tournapulls' roadability. Earthmovers' 4 "C's" were driven to the job site under their own power from Minneapolis . . . 565 miles in 22 hours (25.5 m.p.h.).

The experiences reported here are no exception. C Tournapulls have earned a wide reputation for being "good mudders". Job reports like this prove that their high speeds, economical application on short, medium and long hauls . . . and 100% mobility on rubber, will assure you of lowest-net-cost-per-yard operation under all job conditions. Write or call your LeTourneau Distributor. He will gladly demonstrate a "C" on your job.

Tournadozer dozes scraper-dumped clay into water 4 to 17' deep to build up dock. Says Operator Laurence Derk: "Tournadozer will move a lot more dirt than the biggest crawler. During our 10-hour day I handle output of 7 scrapers. One day, when the rigs were on a 500' to 600' haul, I dozed 6,390 pay yds. into the lake. Between times, I helped our 2 crawler-scrapers through on the spread. Even had time to travel uphill to clean up the edge of the cut."

Tournapull, Tournadozer, Tournamatic, Carryall—Trademark Reg. U. S. Pat. Off. PD-16-D

LETOURNEAU LET EQUIPMENT

R. G. LeTourneau, Inc.

Peoria, Illinois

Which Meets Your Needs Best?

CARDOX - HARDSOCG DRILLS

speed up and cut costs on many kinds of drilling

Tractor Mobility in an Economical One-Man Operated Unit

TRACTOR MOUNTED VERTICAL

Multi-Use Unit Saves You Time on the Job —and Between Jobs

Especially designed for jobs that require maximum mobility and fast drilling of many holes. The carefully engineered, rugged drill unit is driven by the standard farm type tractor. The auger is raised, lowered and fed into the work by a built-in hydraulic cylinder. Handles augers up to 6 inches or more in diameter. Augers are in 6-foot sections, available with any standard connection, for extension to any desired length. Augers can be added in just a few seconds

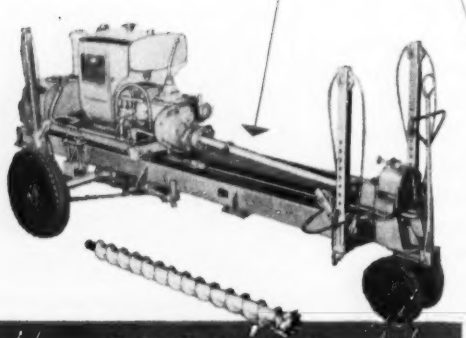

Self-Propelled HORIZONTAL HYDRAULIC

You'll drill more holes per day with this highly mobile unit, because you spend *more* time drilling, *less* time moving from hole to hole. Saves money, too,—you don't have to tie up a truck to move it. Has 32-H.P. air-cooled gasoline engine with power take-off and hydraulic pump. Augers are driven into the bank by a hydraulic piston. Standard auger equipment includes seven 6′ sections (42′ total) for drilling holes up to 6″ diameter. Wheels and axles can be easily removed to permit low level drilling.

STANDARD VERTICAL

Ideal for drilling blast holes or doing exploratory work in clay, gypsum, asbestos, shale, and other materials.

Simple, rugged and very easy to use. The weight of the engine forces the auger and cutter head into the material being drilled. Large hand wheel raises and lowers the power assembly easily. Mast can be lowered when moving unit. Available with 6½ H.P. or 12 H.P. air-cooled gasoline engine. Standard auger equipment includes 6-foot section for 2½″ or 3″ holes. Other sizes also available.

LET YOUR CARDOX DISTRIBUTOR OR REPRESENTATIVE HELP YOU WHENEVER YOU NEED ANY KIND OF DRILLING EQUIPMENT

WAREHOUSES

Harper, West Virginia
Phone: Beckley 4612

Condeco-on-Ohio, W. Va.
Phone:

Boston, Illinois
Phone: Boston 622

Louisville, Colorado
Phone: Louisville 224

307 Northwest Fifth Street
Evansville, Indiana

Condeco-on-Ohio 2181
St. Clairsville, Ohio

Library, Pennsylvania
Phone:

Route 2, Box 99
Pikeville, Kentucky
Phone: Robinson Creek 8

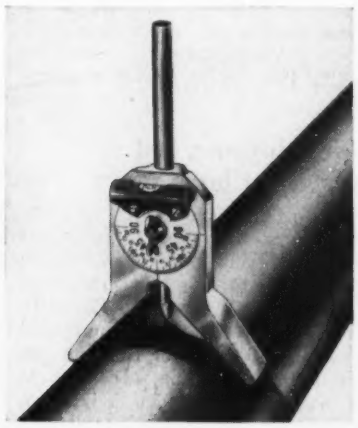

Centering head is described as "five tools in one"

The Boyce centering head is described by its maker as "five tools in one", replacing protractor, centerhead, centerpunch, level and scale. The pocket size device weighs 9 oz, can be used to measure or establish the degree of any angle or of the bend on outside or inside of any circumference. It also measures degree of declivity of any flat surface, mark a point at any degree from center on pipe or other round objects. Body is cast aluminum, dial is graduated in 2½ deg with 10-deg marks and punch is a ⅜-in. drill rod with hardened point. CONTOUR MARKER CORP., 1843 E. COMPTON BLVD., COMPTON, CALIF.

High bolt stresses with Corox hollow bolt heater

Just as structural steel beams are fastened together securely by the contraction of hot rivets as they cool, heated holding bolts on heavy equipment can be turned up tighter. Then, as the bolts cool, flanges are drawn together to make leak-proof joints.

Greater bolt stressing is now possible in large hollow holding bolts through the use of a new Corox bolt heater made by Westinghouse.

The heater is supplied in ratings from 1,000 to 6,200 watts at 120 v. Various heater element sizes permit installation of bolts one to three feet long and in hole diameters from ½ to 1 in. With the selection of proper power rating and size, heater life averages 500 hours, according to the manufacturer.

The heaters are of particular interest to fabricators and users of heavy steam equipment, and they can also be used for heating die blocks and large metal platens, etc. Holes in bolts or studs to accommodate the

"Measured by the ton mile, Hercules Red-Strand preformed outlasts others about two to one," reports one operations manager. Another operator testifies, "Our records show Red-Strand is considerably out in front of four other ropes."

Why HERCULES Red-Strand excels

What's the reason for such performance and praise? In simple terms, it's because *higher-than-rated quality* in Red-Strand preformed delivers *longer-than-expected service.*

If you're not completely satisfied with *your* wire rope service, try Red-Strand preformed. You'll experience the difference too.

HERCULES® Red-Strand wire rope made by A. Leschen & Sons Rope Company, St. Louis 12, Missouri

In business only to make wire rope ... better wire rope ... since 1857

HIGHER-THAN-RATED QUALITY
LESCHEN
WIRE ROPE AND SLINGS
A. LESCHEN & SONS ROPE COMPANY

DISTRIBUTORS IN ALL PRINCIPAL CITIES

from any point of view

you'll do better with

ARKWRIGHT

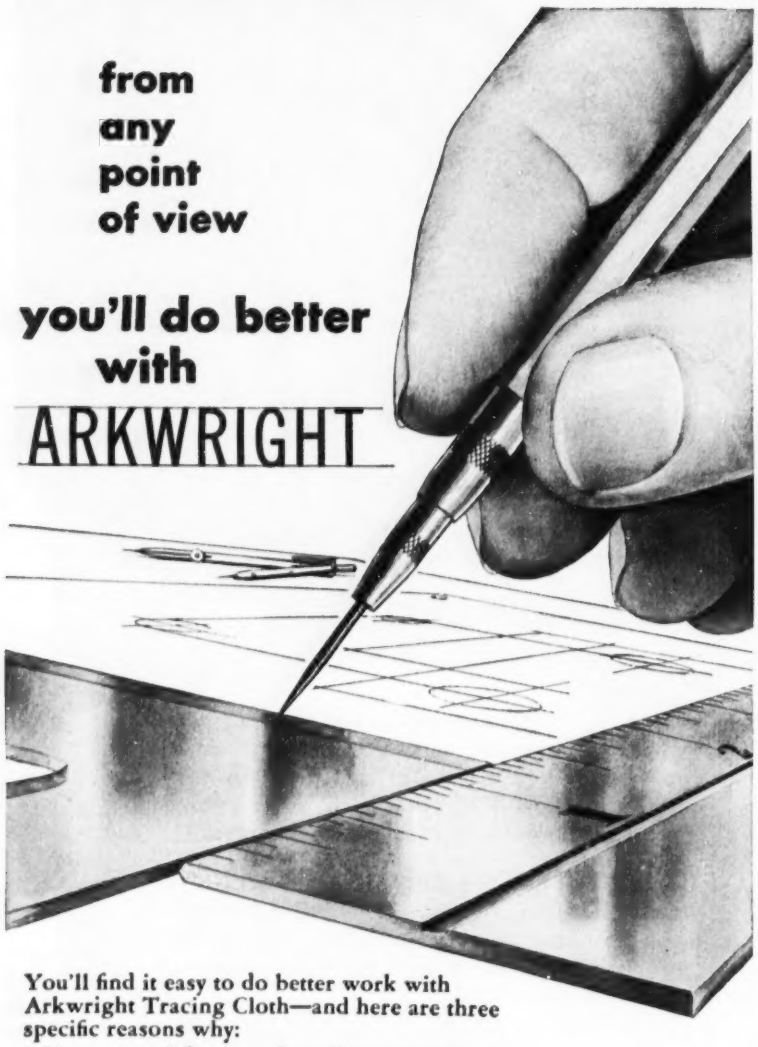

You'll find it easy to do better work with Arkwright Tracing Cloth—and here are three specific reasons why:

1 You can re-ink razor-sharp lines over any erasure without "feathering" or "blobbing".

2 You're never slowed down by pinholes, uneven yarns or other imperfections.

3 You can always count on clean, clear reproduction—even years after you make the drawing. Arkwright Tracing Cloth is *permanently* transparent—won't turn opaque, brittle or paper-frayed with age.

They're important reasons for putting *your* best work on Arkwright Tracing Cloth. Like a sample? Write Arkwright Finishing Co., Industrial Trust Bldg., Providence, R. I.

ARKWRIGHT

Tracing Cloths

AMERICA'S STANDARD FOR OVER 30 YEARS

heater can be drilled while fabricating, during installation, or during a shutdown. WESTINGHOUSE ELECTRIC CORP., BOX 2099, PITTSBURGH 30, PA.

Air-conditioning unit is suitable for large rooms

A 1-hp air-conditioning unit designed for extra large rooms, stores and offices has been added to the Quiet Kool air conditioner line. The unit, Model G-10-A, cools up to 550 sq ft, circulates 310 cu ft per minute and introduces 80 cu ft of fresh air per minute for ventilation, according to the manufacturer. Room air is drawn in through a low, front grill to prevent interference with drapes or curtains.

The unit can be installed in any double-hung window 28¾ in. to 48 in. wide. The maker claims that two men can install it in 15 to 20 minutes with no plumbing connections necessary. The assembly uses Freon-22 refrigerant. Overall dimensions are 28½ by 14¾ by 30¾ in. deep. It extends 14¾ in. into a room and projects 16 in. outside the window. Net weight is 210 lb and the unit is available for either 230 v, 60 cycle or 230 v, 50 cycle operation. QUIET KOOL DIV., QUIET HEET MFG. CORP., NEWARK, N. J.

New Product briefs . . .

A totally-enclosed motor developed by U. S. Electrical Motors Inc., Box 2058, Terminal Annex, Los Angeles 54, California and designated as Type SS, is designed for service where dampness, dust, fire hazards and corrosive fumes prevail. It's self-cooling and comes in sizes from ½ to 2 hp. Lubriflush bearings are said to force new grease through the bearings for a thorough purge of the old grease.

Manco Mfg. Co., Bradley, Ill. has added another **Riveteer Unit,** Model R-20-185 to its expanding line (ENR Sep. 6 '51 p 123 and May 15 '52 p 138). It can handle rivets up to 4½ x ½ in. and is powered by a 10,000-psi hydraulic pump, operating from a 2-hp, 220/440-v 3-phase motor. Riveting unit weighs 65 lb; pump unit, 400 lb.

Dennis No. 8500 **plastic sealant** is a general purpose sealing compound **recommended for** almost any purpose where superior **glazing, caulking and waterproofing** compound is required. **Dennis Chemical Co., 2701 Papin St., St. Louis 3, Mo.** says it's non-drying, non-hardening, non-staining and non-contaminating.

3 steps to faster drilling

1. Bits That Cut Faster—Stay Sharper Longer

Carset Jackbits with long lasting Carboloy inserts give more footage per bit. They have averaged 260 feet—compared to 1 foot for steel bits—in hard, dense basalt. Their higher drilling speeds have enabled many quarrymen and road builders to complete five blast holes for every three with steel bits. Gauge wear is so low that one bit will produce a uniform diameter hole the full depth of the bore—eliminating the tapered holes common with steel bits.

2. Powerful Fast-Working Drills

FM-3 wagon drills combine maximum drilling power with complete flexibility for drilling in any position. Mounting the hard-slugging X-71 WD rock drill, the FM-3 is unexcelled for drilling speed and hole-cleaning ability. It handles 6-foot steel changes and drills holes up to 24 feet deep. An exclusive self-locking, slip-proof worm gear arrangement quickly raises or lowers the yoke into any position. The tower can be inclined to any desired angle and rotated at right angles to the carriage for operation in restricted areas. The wheels can be turned 90° for line holing close to a face.

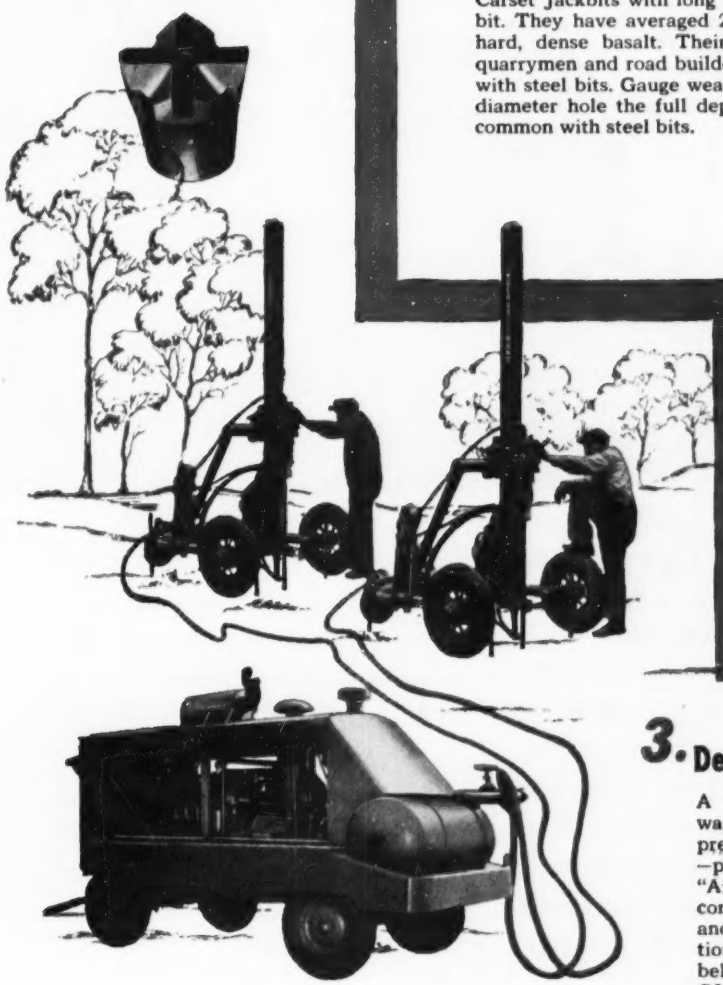

3. Dependable, Economical Compressors

A GYRO-FLO 600 easily handles two FM-3 wagon drills. The portable two-stage rotary compressor supplies a smooth flow of air at all times—permits smoother operation of air tools. The "Air Glide" capacity control with "Floating Speed" control of engine keeps pressure between 100 and 110 psi at all times. The oil-cooling-lubrication system keeps discharge air temperatures below 200° and wear down to a minimum. The GYRO-FLO 600 can be moved quickly into new positions on the job because it is up to 40% lighter than other equal-capacity compressors. Other models—105, 210, 315 cfm.

Use the **IR CONTRACTORS' COMBINATION**

- **Everything you need for AIR POWER.**
- **Top quality machines that work as a team.**
- **Machines designed, built, sold and serviced by men who know AIR POWER.**

Ingersoll-Rand

11 BROADWAY, NEW YORK 4, N. Y.

847-14

COMPRESSORS • TAMPERS • ROCK DRILLS • WAGON DRILLS • JACKBITS • DIGGERS • PUMPS

FROM THE CANADIAN BORDER TO THE GULF OF MEXICO... from the Rockies to Lake Michigan, the Ohio and Mississippi Rivers... this is the broad sweep of the Great Plains served by Lock Joint's permanent pipe manufacturing plant at Turner, Kansas. Specializing in Lock Joint Prestressed Concrete Cylinder Pipe in diameters from 16" to 48", designed for any pressure common to water works practice, the Turner plant also answers demands for this type of pipe in the Great Lakes area.

...LOCK JOINT CONCRETE PRESSURE PIPE is readily available east of the Mississippi from the Company's three other permanent plants in Wharton, N. J.; Detroit, Mich., and Columbia, S. C. Together these four strategically located plants are equipped to handle any contract, however large or small, and offer the ultimate in modern Concrete Pressure Pipe in a variety of standard diameters.

SCOPE OF SERVICES—Lock Joint Pipe Company specializes in the manufacture and installation of Reinforced Concrete Pressure Pipe for Water Supply and Distribution Mains 16" in diameter or larger, as well as Concrete Pipes of all types for Sanitary Sewers, Storm Drains, Culverts and Subaqueous Lines.

LOCK JOINT PIPE COMPANY

Established 1905

P. O. Box 269, East Orange, N. J.

PRESSURE PIPE PLANTS: Wharton, N. J., Turner, Kan., Detroit, Mich., Columbia, S. C.

BRANCH OFFICES: Casper, Wyo. • Cheyenne, Wyo. • Denver, Col. • Kansas City, Mo. • Valley Park, Mo. • Chicago, Ill. • Rock Island, Ill. • Wichita, Kan. Kenilworth, N. J. • Hartford, Conn. • Tucumcari, N. Mex. • Oklahoma City, Okla. • Tulsa, Okla. • Beloit, Wis. • Hato Rey, P. R. • Caracas, Venezuela

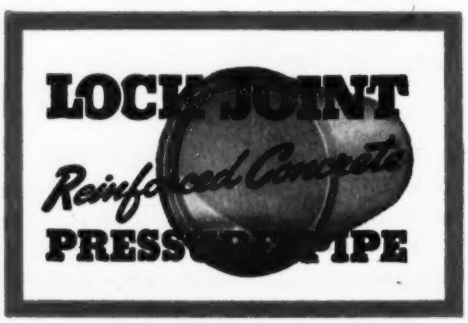

PUBLICATIONS

Structural Bridge Flooring—A corrugated, formed steel plate flooring recommended for new or existing highway bridges, viaducts, overpasses and similar structures is the theme of this detailed 12-page booklet. Well illustrated throughout with photographs of various installations and uses, the booklet includes a general description of flooring details, design data and specifications. Copies of the "Structural-Plate Bridge Flooring" may be obtained by writing: UNITED STEEL FABRICATORS, INC., WOOSTER, OHIO.

Jaw Crushers—For users of jaw crushers in mines, quarries or aggregate plants, this 7-page bulletin describes in detail, with schematic drawings, 10x16 in. jaws up to 30x42 in. jaws. Specifications and general dimensions are given for various requirements. Write for Bulletin No. 280 SMITH ENGINEERING WORKS, MILWAUKEE, 12, WISCONSIN.

Porcelain Enamel—Typical construction details and many photographs of new shopping centers and other buildings where architectural porcelain enamel was used make up the body of this 12-page booklet. Architects and engineers may find the names of builders and designers listed with the illustrations of buildings where they have used the material. Write DAVIDSON ENAMEL PRODUCTS, INC., ARCHITECTURAL DIVISION, DEPARTMENT Z-53, LIMA, OHIO.

Air Control Valves—This new 12-pager gives three-color schematic diagrams of the three fundamental types of industrial air control valves. With explanations and descriptions, it is of interest to engineers who need direct-operated, remote controled, or integral pilot operated air-power valves. Bulletin No. 101A. ROSS OPERATING VAVLE COMPANY, 120 EAST GOLDEN GATE AVENUE, DETROIT 3, MICHIGAN.

Perforated Drain Tile—This 4-page folder gives tips on the proper installation of perforated drain tile for basement and foundation drainage, as well as sanitary septic tank disposal systems. It includes diagrams of home drainage plans and an effective septic tank disposal system, of interest to any house builder in areas unserved by regular sewage disposal systems. Write for "Perforated Drain Tile," E. C. MILLIKEN, GENERAL MANAGER, BOWERSTON, SHALE COMPANY, BOWERSTON, OHIO.

ADVERTISERS IN THIS ISSUE

Acker Drill Co. 92
Acrow, Inc. 61
Aero Service Corp. 75
Albert Pipe Supply Co. 89
American Bridge Div., U. S. Steel Corp. 44
American Creosoting Co. 13
Arkwright Finishing Co. 124
Austin-Western Co. 49

Barber-Greene Company 97
Bethlehem Steel Co. 1
Borden Metal Products 20
Borden & Riley Co. 88
Broderick & Bascom Rope Co. ....4th Cover
Brunson Instrument Co. 82

Cardox Corp., Mining Div. 122
Cement Gun Company 85
Chapman Valve & Mfg. Co. 12
Coffing Hoist Co. 90
Complete Machinery & Equip. Co. 89
Concrete Grinding Corp. 46
Concrete Reinforcing Steel Inst. 55
Crucible Steel Co. 68

Deming Co., The 69

Enterprise Galvanizing Co. 90
Erie Steel Construction Co. 69

Faber-Castell Pencil Co., A. W. 60
Flockhart Foundry Co. 11

General Electric Company .....2nd Cover
German-American Trade Promotion 89
Getman Bros. 86
Goodrich Company, The B. F. 5
Grace Mfg. Co., W. E. 84
Griffin Wellpoint Corp. 97
Gulf Refining Co. 6
Grinnell Company, Inc. 3
Gunite Concrete & Construction Co. 94

Harnischfeger Corp. 7
Hayward Co. 94
Hose-McCann Telephone Co., Inc. 86

Imperial Pencil Tracing Cloth 85
Ingersoll Rand Co. 125
International Harvester Co. 62
International Steel Co. 66
Irvington Form & Tank Corp. 86

Johns-Manville Corp. 78, 79
Johnston Pump Co. 48

Kern Instrument Co. 88
Kinnear Mfg. Co. 90
Koppers Co., Wood Preserving Div. 54

Laclede Steel Co. 50
Larsen Products Corp. 74
Leschen & Sons Rope Co., A. 123
LeTourneau, Inc., R. G. 120, 121
Lincoln Electric Corp. 67
Littleford Bros., Inc. 94
Lock Joint Pipe Co. 126

Macomber, Inc. 35
Mahon Co., R. C. 57
Manitowoc Engineering Works 36
Marietta Concrete Corp. 91
Master Vibrator Co. 56
McCaffery-Ruddock Tagline Corp. 83
McGraw-Hill Book Co. 93
McKiernan-Terry Corp. 92
McKinney Drilling Co. 95
Mississippi Glass Co. 93
Monsanto Chemical Co. 4
Mueller Co. 77

Ohio Locomotive Crane Co. 94
Oliver Corp. 80

Permutit Co., The 8
Phoenix Bridge Co. 50
Pioneer Engineering Works 64, 65
Pipe Linings, Inc. 95

Raymond Concrete Pile Co. .....3rd Cover
Robertson Co., H. H. 15
Rockford Clutch Div., Borg-Warner 87
Roebling's Sons Co., John A. 72, 73
Rogers Bros. Corp. 14
Ryerson & Sons, Inc., Jos. T. 82

Sauerman Bros., Inc. 91
Servicised Products Co. 46
Sika Chemical Corp. 87
Smith Co., S. Morgan 16
Snow-Nabstedt Gear Corp. 84
Socony Vacuum Oil Co. 52
Spencer, White & Prentis, Inc. 82
Sprague & Henwood, Inc. 50
Standard Dry Wall Products 18
Stang Corp., John W. 40
Stone & Webster Engineering Corp. 70

Taller & Cooper, Inc. 51
Timber Engineering Co. 47
Timber Structures, Inc. 63
Timken-Detroit Axle Co. 9
Timken-Detroit Axle Co. 10
Trailer Village, Inc. 90
Twin Disc Clutch Co. 59

Union Metal Mfg. Co. 58
Universal Manufacturing Co. 76

Viber Co. 98
Vibro-Plus Products, Inc. 54

Warren Foundry & Pipe Corp. 99
Wild Surveying Instrument Supply Co. of Amer., Inc., Henry 2
Wood Mfg. Co. 83

Professional Services 108-109-110

SEARCHLIGHT SECTION

(Classified Advertising)

H. E. Hilty, Mgr.

Employment
Positions Vacant 110, 111, 112
Selling Opportunities Offered..... 111
Positions Wanted 110, 111

Educational
Schools 112
Tutoring 112

Business Opportunities
Offered 112

Notices
Proposal 104, 105, 106, 107

Equipment
(Used or Surplus New)
For Rent 116
For Sale 113-118
Piling 114
Pipe 116
Rail 116
Surveying Instruments 118

Wanted
Equipment 118

ADVERTISERS INDEX 118

ENGINEERING NEWS-RECORD

D. S. ROBERTSON, *Adv. Sales Manager*

HOWARD T. OLSEN, *Business Manager*

Sales Representatives: M. J. Storz and E. A. Callahan, Jr., 330 W. 42nd St., *New York;* F. G. Hudson, L. H. Hunt, W. G. Payne, 520 N. Michigan Ave., *Chicago;* R. E. Dorland, 68 Post St., *San Francisco;* A. B. Cozzens, 17th & Sansom Streets, *Philadelphia;* E. E. Duff, Jr., Hanna Bldg., *Cleveland;* B. F. Horn, Penobscot Bldg., *Detroit;* W. E. Donnell, Continental Bldg., *St. Louis;* H. L. Keeler, 1111 Wilshire Bldg., *Los Angeles;* R. C. Maultsby, Rhodes-Haverty Bldg., *Atlanta;* James Cash, First National Bank Bldg., *Dallas. Other Sales Offices:* 738-39 Oliver Bldg., *Pittsburgh;* 350 Park Sq. Bldg., *Boston;* McGraw-Hill House, *London.*

EDITORIALS

The real key to housing

OVER THE LAST FEW YEARS the homebuilding industry has done a fine job in building for the various income groups while at the same time placing major emphasis on the low-income bracket. This is as it should be, to provide the nation with housing—and as it must be if anywhere near the million homes a year that are needed are to be built.

The low-income group holds the key to the housing problem. Providing it with new homes is the only way that the homebuilding industry can both discharge its responsibility and remain the prosperous, vital element in the economy that it deserves to be.

Periodically, the argument is advanced that the emphasis should be placed on building higher priced homes, which when they become "old" can be passed on to the low-income buyer. This filtering-down process usually receives most of its opposition from the social theorists who seem to feel that it is degrading in some mysterious way. The best that can be said for such views is that they are for the most part misguided. Many people who can afford a new home often prefer a used one. Actually, the case against the filtering-down process is one of simple economics, and it is on this basis that it should be opposed.

To begin with, it is obvious that there are far more people who can afford a low-price house than a high-price one. About twice as many persons, for example, earn enough to buy a $6,000-house as can afford a $10,000-house. And about five times as many people can buy a $10,000-house as can afford a $20,000-one. Hence, if homebuilders build for the $20,000-market and manage to saturate it, they have left unserved ten times as many families as they house. Even should they concentrate on and saturate the $10,000-market, less than one-half of the lower-income group could be housed in the dwellings thus freed to be filtered down.

Another point to be noted is that, until we are much nearer a market saturation point in the higher priced homes, there will not be much filtering down, at least at prices that the low-income group can afford to pay. Those used houses that are available at really low prices are apt to be of the kind that should be torn down to avoid the creation of slums. This is the one aspect of the social argument against filtering down that has force: in a period of housing shortage, low-income people should not be required to live in the type of used house that can be purchased at a low price.

Filtered-down housing will not meet the nation's needs. Only brand new low-cost shelter can do it. And only this type of housing offers the homebuilding industry enough of a market to assure growth and prosperity. The real key to housing is a soundly built low-cost house, mostly of the single-family type, but also in mass-type apartment houses where land prices make them necessary. The challenge to the homebuilders, in either event, is to develop and offer for sale or rent the type of living units that low-income people would like to live in at prices they can afford to pay. When this is done we can go on building a million housing units a year indefinitely.

Gathering momentum

HIGHWAY CONSTRUCTION, which chalked up a 23%-gain last year, is scheduled to increase another 34% this year. In any other type of activity or industry this would be considered a boom of major proportions. For highways it is no more than a favorable trend—and it would be a mistake to consider it otherwise in view of the great need for more and better roads. The significant fact is that the realization of this need is finally gathering momentum, backed by the will of the ordinary citizen and of his legislators to spend the necessary money.

What this money amounts to for 1953 is detailed for the first time in an article in this issue, made possible by the splendid cooperation of highway officials with ENGINEERING NEWS-RECORD's editors. All 48 state highway departments and all of the toll road authorities furnished us with their budgets, frequently as the first order of business after they were completed. For this we are grateful, as we feel sure the reader will be.

What these budgets show is that the state highway departments will spend 3% more this year for new construction than last year, with a number of individual states registering increases in the neighborhood of 50%, and one going up to 102%. But they also show that toll road construction expenditures will jump by 344%—and that toll roads account for more than a quarter of the $2.2-billion new construction total. This can be construed as meaning that the ordinary citizen—who willingly pays the tolls and frequently buys the bonds that finance these roads—is ahead of the legislators in his appraisal of what can be afforded for better highways. Still, the legislators are much more alive than for many years past to the need for more funds, so that future appropriation prospects are encouraging.

Actually, so far as this year is concerned, there is reason to doubt that a bigger program than the one projected could be carried out. The shortage of highway personnel is the principal reason, but material supplies might also prove inadequate if a larger program were tried. By next year, and as time goes on, the engineer shortage can be overcome by better salaries, and the material shortages by new production capacity. Both of these necessary developments will respond to the pressure for new highways. The 34%-gain over last year is a good omen. Several successive annual increases at this rate and highway construction will be at an adequate level—perhaps deserving to be called a boom.

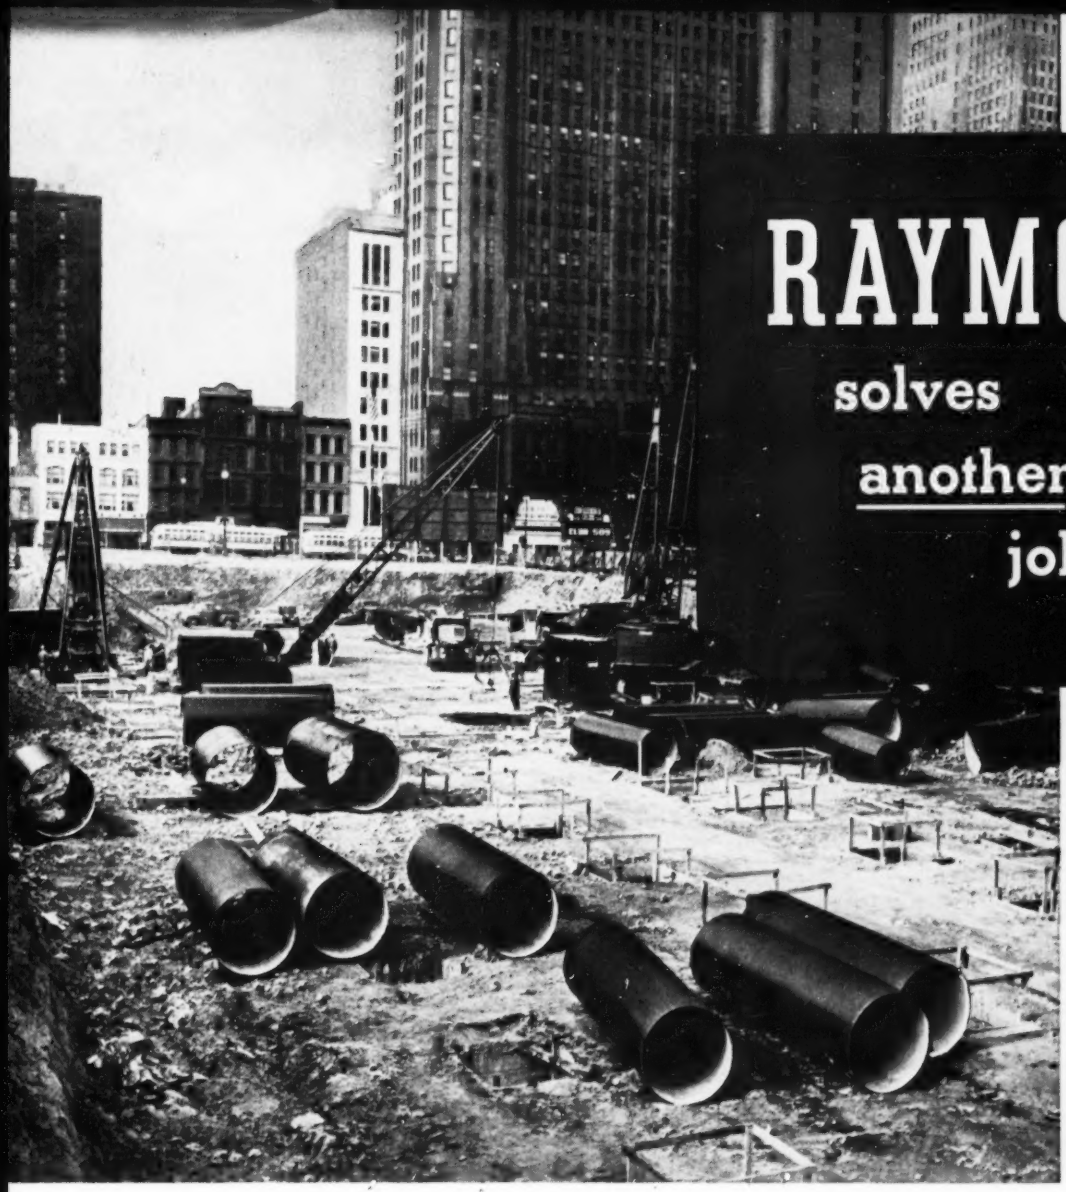

RAYMOND

solves another tough job!

at left
Sinking Gow caissons for Detroit's City-County Building

FOUNDATION CONTRACTOR:
O. W. Burke Co.

ARCHITECTS & ENGINEERS:
Harley, Ellington & Day, Inc.

CONSTRUCTED FOR:
Detroit-Wayne Joint Building Authority

...**To provide** the foundation for the City-County Building in Detroit's new Civic Center, Raymond placed 126 Gow caissons, with diameters of 48 to 74 inches, to depths exceeding 100 feet to hardpan. The caissons were belled out on the hardpan to varying diameters. Completion of this project ahead of schedule is another example of **how** Raymond engineers combine knowledge and experience with specially designed equipment to provide any type foundation anywhere. We would like to serve you on your next project.

RAYMOND CONCRETE PILE CO.

140 CEDAR STREET • NEW YORK 6, N. Y.

BRANCH OFFICES AROUND THE WORLD FOUNDED 1901 *IN THE PRINCIPAL CITIES OF UNITED STATES AND CENTRAL AND SOUTH AMERICA*

THE SCOPE OF RAYMOND'S ACTIVITIES . . .

Foundation Construction . . . Harbor and Waterfront Improvements . . . Soil Investigations . . . In-Place Pipe Lining . . . Specialized Construction.

BRODERICK & BASCOM

Yellow Strand®

PREFORMED WIRE ROPE

Have you *calculated* the economy of long-lasting wire rope?

Anyone using wire rope in quantity can't afford to guess whether it's a good buy. Each installation had better prove itself right down to the last decimal. That's how we want you to judge tough, flexible Preformed Yellow Strand. Its economies are the measurable kind: a fast rig-up and break-in . . . accurate control by the operator . . . prolonged service in the face of bending stresses, high speeds and shock loads. Seeing that you get the correct line for top production is the job of our special wire-rope engineers. Tell us now that you'd like to have one call.

Broderick & Bascom Rope Co.
St. Louis 15, Mo.

Branches:
New York, Chicago, Houston, Odessa, Tex.,
Los Angeles, San Francisco,
Portland, Seattle

Factories:
St. Louis, Peoria, Houston, Seattle

Distributors in All Industrial Centers